



MADCAP PULSE 4

Installation Guide for Pulse on Windows Server 2012

Copyright 2018 MadCap Software. All rights reserved.

Information in this document is subject to change without notice. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of those agreements. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or any means electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of MadCap Software.

MadCap Software
7777 Fay Avenue
La Jolla, California 92037
858-320-0387
www.madcapsoftware.com

THIS PDF WAS CREATED USING MADCAP FLARE.

CONTENTS

CHAPTER 1

- Introduction 6
 - Two-Server Deployment 7
 - Single-Server Deployment 8

CHAPTER 2

- Requirements 9
 - Pulse Web Server10
 - Pulse Database Server13
 - Required Access Credentials and Networking Information16

CHAPTER 3

- Installing the Prerequisites18
 - Before You Begin19
 - Installing the Prerequisites20

CHAPTER 4

- Installing Microsoft SQL Server 30
 - Before You Begin31
 - Installing SQL Server32

CHAPTER 5

Installing and Activating Pulse	51
List of Pulse Components	52
List of Windows Service Applications	53
Installing the Pulse Server Application	54
Activating Pulse	60

CHAPTER 6

Pulse Server Configuration	64
Configuring Pulse for the First Time	65
Starting the Pulse Server Application	74
Setting the PulseAdmin Password	75
Pulse Server Configuration Window	76
Importing Feedback Data	85
Updating Pulse	86
Uninstalling Pulse	87

CHAPTER 7

Integrating Flare and Pulse	89
Integration Options	90
Enabling the Pulse Server	91
Setting Up the Community in Flare	94
Mapping/Remapping a Flare Community to Pulse	103
Enabling the Community Tab in the Output	115
Setting the Community Options—Comments and Search Results	118
Building and Publishing the Flare Output	122

CHAPTER 8

Frequently Asked Questions	123
----------------------------------	-----

General	124
Windows Installer	125
.NET Framework	126
IIS	130
Pulse Setup Program	139
Pulse Server Application	140
RabbitMQ	144
User Administration	146

APPENDIX

PDFs	147
------------	-----

CHAPTER 1

Introduction

The installation of Pulse depends on multiple applications and utilities working together. There are a couple of types of deployment you can use, and you can install Pulse on one of three different operating systems. The installation type that you choose will depend on factors that are specific to your environment, such as the number of users you plan to host, your web usage, and other factors related to deploying an SQL database and IIS server.

This guide discusses how to install Pulse on Windows Server 2012.


This chapter discusses the following:

Two-Server Deployment	7
Single-Server Deployment	8

Two-Server Deployment

The most common deployment type for Pulse is to install the components in a distributed environment on two servers:


- **Pulse Web Server** The web server is a Windows Server system running Microsoft Internet Information Services (IIS). You install the Pulse server application on this system.
- **Pulse Database Server** The database server is a Windows Server system running Microsoft SQL Server. You install an instance of Microsoft SQL and create the Pulse database on this system.

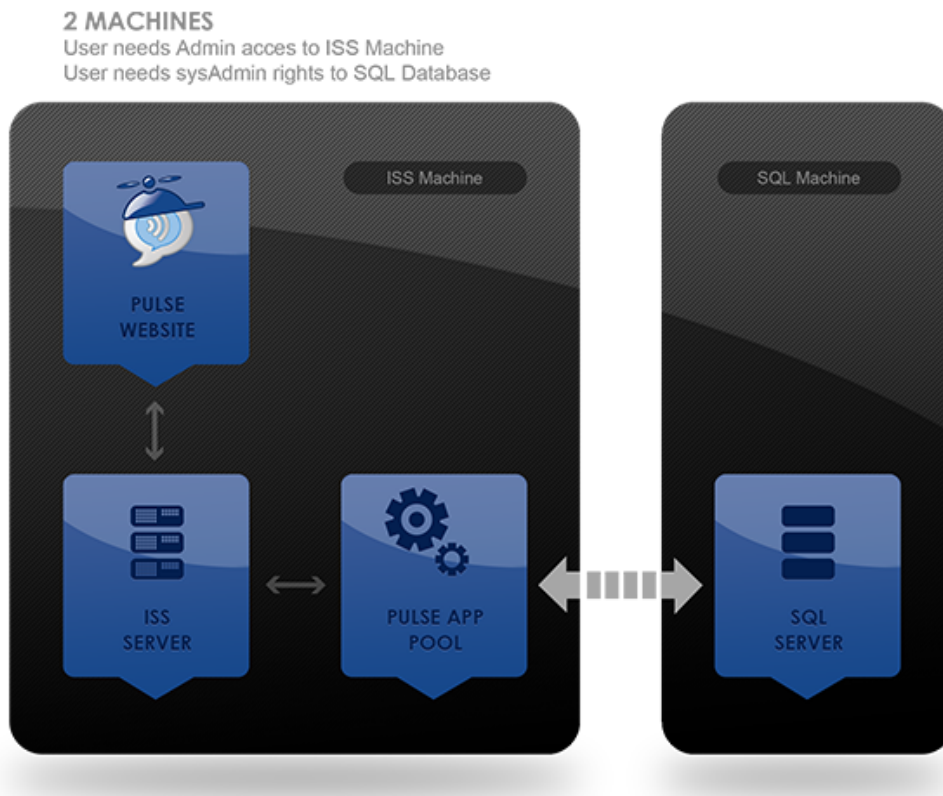

After deploying Pulse, the integrated Flare output can be published either to the Pulse web server or to a different system with access to the Pulse web server.

Single-Server Deployment

It is also possible to install all of the Pulse components on a single server. This means the Pulse web server and database server are running on a single system. Although this is a simple way to deploy Pulse, most organizations choose to install Pulse in a distributed environment because it offers greater scalability and performance.

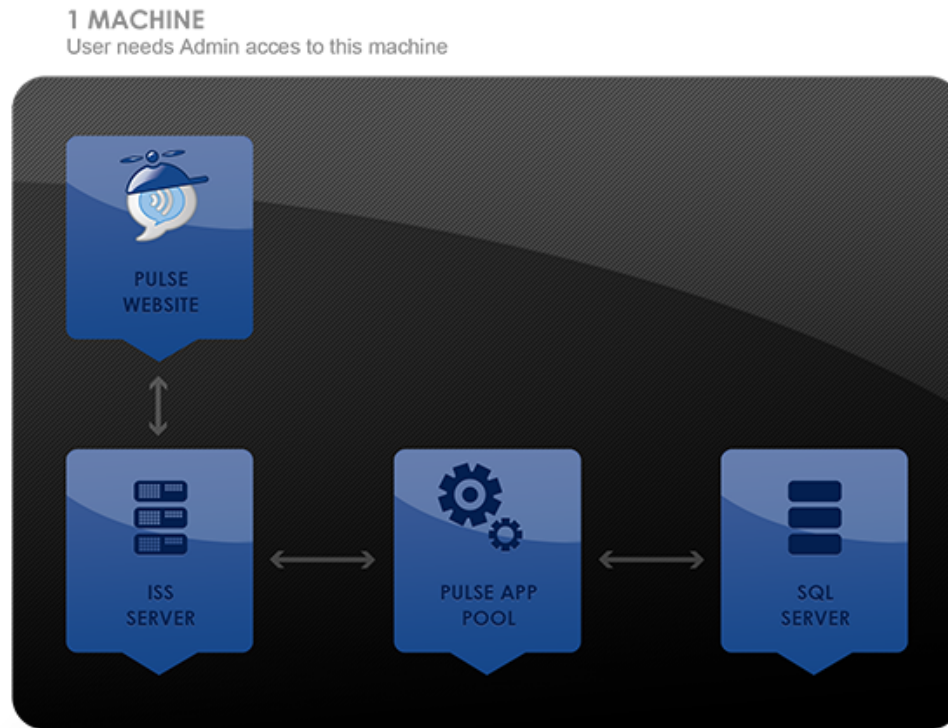

After deploying Pulse, the integrated Flare output can be published either to the Pulse web server or to a different system with access to the Pulse web server.

! IMPORTANT: When deciding which installation type is best for your environment, it is recommended that you discuss your options, deployment strategy, and system requirements with your IT department.

CHAPTER 2

Requirements

As you prepare for your Pulse installation, familiarize yourself with the minimum system requirements.

This chapter discusses the following:

- Pulse Web Server 10
- Pulse Database Server 13
- Required Access Credentials and Networking Information 16

Pulse Web Server

The Pulse web server provides users the ability to access and use the web-based user interfaces of the Pulse system.

WEB SERVER—MINIMUM HARDWARE REQUIREMENTS


This table details the minimum hardware requirements for the Pulse web server:

Component	Minimum Requirement (for a Pilot Server)	Recommended (for a Production Server)
Processor	32-bit, quad-core	64-bit, quad-core
Memory	4 GB	4 GB
Hard Disk	100 GB (for data drives) 80 GB (for system drives) For daily operations, maintain at least twice as much free space as RAM.	100 GB (for data drives) 80 GB (for system drives) For daily operations, maintain at least twice as much free space as RAM.

WEB SERVER—OPERATING SYSTEM REQUIREMENTS

This table details the operating system requirements to install the Pulse web server:

The Pulse setup program installs the Pulse application on the web server (this is the server running IIS). Before running the setup program, you must make sure Microsoft .NET Framework 4.5 is installed.

 **IMPORTANT:** All of the latest Windows service packs and critical updates must also be installed.

Requirement	Notes
Microsoft Windows Installer (MSI) 5.0	The MSI 5.0 is included with the operating system.
Internet Information Services Version 8	This is included with the operating system. Use the Server Manager to add the Web Server (IIS) role service.
ASP.NET 4.5	This is included with the operating system. Use the Server Manager to add the ASP.NET role service. This is covered in the steps for installing IIS.
Microsoft .NET Framework 4.5	This is included with the operating system and may already be installed on your server, typically by a Network Administrator. If it is not installed, you can download it from: http://www.microsoft.com/en-us/download/details.aspx?id=30653

WEB SERVER—PULSE SETUP PROGRAM

The Pulse setup program installs the Pulse application on the web server (this is the server running IIS). Before running the setup program, you must make sure Microsoft .NET Framework 4.5 is installed.

WEB SERVER—MICROSOFT VISUAL C++ 2010 REDISTRIBUTABLE

The Pulse setup program requires the web server to be running the Microsoft Visual C++ 2010 Redistributable or a newer version.

This prerequisite is automatically installed when you run the Pulse setup program. The setup program automatically checks your system for a compatible version. If a compatible version is detected, you can quit the system check. If a compatible version is not detected, you will be prompted to download and install it. See "Installing and Activating Pulse" on page 51.

! **IMPORTANT:** Software vendors commonly redistribute different versions of Visual C++ with their programs. If your system is running more than one version of Visual C++, you do not want to delete or uninstall any version from your system as doing so can render any linked software programs inoperable.

WEB SERVER—RECOMMENDED BROWSERS

For best results, it is recommended that you use one of these web browsers when accessing the web-based Pulse tools:

Browser	Version
Microsoft Internet Explorer	7 or later
Apple Safari	5
Mozilla Firefox	3.5 or later
Google Chrome	5.0 or later

Pulse Database Server

The Pulse database server is the primary repository for Pulse data. This includes users, groups, files, messages, videos, and images.


DATABASE SERVER—MINIMUM HARDWARE REQUIREMENTS

This table details the required hardware components for the Pulse Database server:

Component	Minimum Requirement (for Pilot)	Recommended (for Production)
Processor	32-bit, 4 core	64-bit, 4 core
Memory	4 GB	4 GB
Hard Disk	100 GB (for data drives) 80 GB (for system drives) For daily operations, maintain at least twice as much free space as RAM.	100 GB (for data drives) 80 GB (for system drives) For daily operations, maintain at least twice as much free space as RAM. For every 1,000 users per year, we recommend 100 GB for storage.

DATABASE SERVER—OPERATING SYSTEM REQUIREMENTS

This table details the operating system requirements for the Pulse database server:

 **IMPORTANT:** All of the latest Windows service packs and critical updates must also be installed.

Requirement	Notes
Microsoft Windows Installer (MSI) 5.0	The MSI 5.0 is included with the operating system.
Internet Information Services Version 8	This is included with the operating system. Use the Server Manager to add the Web Server (IIS) role service.
ASP.NET 4.5	This is included with the operating system. Use the Server Manager to add the ASP.NET role service. This is covered in the steps for installing IIS.
Microsoft .NET Framework 4.5	This is included with the operating system and may already be installed on your server, typically by a Network Administrator. If it is not installed, you can download it from: http://www.microsoft.com/en-us/download/details.aspx?id=30653

DATABASE SERVER—SQL SERVER REQUIREMENTS

To give end users the ability to use the Pulse search features, you must install a supported version of Microsoft SQL Server. The edition you install must support the full-text search feature. Please refer to the documentation provided with SQL Server to determine if that edition supports full-text search.

❗ **IMPORTANT:** Microsoft SQL Server Express Edition with Advanced Services is the *only* Express edition from Microsoft that is compatible with Pulse. This is because Pulse requires the full-text search feature.

❗ **IMPORTANT:** Microsoft SQL Server Express with Advanced Services edition supports a maximum database size of 10 GB. It is best suited when used in lab/test environments. It is not recommended for production environments.

Required Access Credentials and Networking Information

The user performing the installation will also need the following information in order to complete the installation and configuration tasks:

Item	Requirements	Purpose
Active Directory Domain Account	Create a Domain Account with Local Administrator Rights for the Pulse Server. This account will need: <ul style="list-style-type: none">■ A password that never expires■ A valid email address in Active Directory■ Read access to Active Directory■ You should also grant this account System Administrator (sysadmin) privileges in SQL Server.	Used by the PulseService on the application server to schedule notifications, send emails, and deliver posts. Used by the Web Application Pool.
DNS Entry	<ul style="list-style-type: none">■ Resolves to the Pulse web server■ Uses a fully qualified domain name	The URL that Pulse Administrators use to access the Pulsedashboard.
Outbound Email Settings (SMTP Relay)	Port 25 (typical, depends on your network)	Gives Pulse the ability to send outbound email messages.
Inbound Email Settings	To enable reply-to email capabilities, you will need settings for one of the following: <ul style="list-style-type: none">■ POP3 host, username, and password OR <ul style="list-style-type: none">■ Exchange Web Services URL, domain, username, and password for the Microsoft Exchange account OR <ul style="list-style-type: none">■ SMTP Drop Folder	Required by Pulse web server to provide reply-to email capabilities.

Item	Requirements	Purpose
SSL Certificate for Pulse Web Server (Optional)	If you plan to use the Secure Sockets Layer (SSL) protocol to establish an encrypted connection with your Pulse site, you must obtain an SSL certificate from an SSL provider and install it on the Pulse web server.	<p>Gives site visitors the ability to access your site using the secure https:// protocol.</p> <p>Use the Internet Information Services (IIS) Manager to install the SSL Certificate.</p>

Installing the Prerequisites

Information for Network Administrators

To prepare for a Pulse installation, you need to prepare the systems that will be hosting the Pulse server application and the Microsoft SQL Server instance for the Pulse database.

This chapter discusses the following:

Before You Begin	19
Installing the Prerequisites	20

Before You Begin

In order to download and install the prerequisites, you need an Internet connection.

You also need the ability to log on the server(s) as a user who has access permissions to install software and change configuration settings on the system. This requires you to have access credentials for one of these accounts:

- **The Built-in Administrator Account for Windows Server** This account has full administrative privileges and is included with the operating system by default. See the person who installed the server's operating system for the user name and password.


OR

- **A Local User Account with Administrative Privileges** If available in your environment, you can use a local administrator account. With a local administrator account, the server checks its own files to authenticate the user and determine if they have the appropriate administrative rights to install software on the system. This account is created on the server, typically by a Network Administrator.

Installing the Prerequisites

First, install Windows Server 2012 on the system acting as the Pulse web server and Pulse database server. Whether you are setting up a new server or just using an existing Windows server, you should also ensure that the operating system is updated with all of the latest service packs, critical patches, and security updates from Microsoft.

If you are not familiar with how to install a server operating system, contact your Windows Administrator and/or Network Administrator for assistance. This will help to ensure that your server is in compliance with any security and network requirements specific to your environment.

 **IMPORTANT:** If you are not familiar with how to install a server operating system, contact your Windows Administrator and/or Network Administrator for assistance. This will help to ensure that your server is in compliance with any security and network requirements specific to your environment. See "Requirements" on page 9.

HOW TO INSTALL IIS

IIS provides the server hosting Pulse with web server capabilities and the ASP.NET framework, which is a feature of the .NET Framework. It supports the creation of web pages and web services. *If you are setting up a new web server for Pulse, it is very important that you install IIS before installing the .NET Framework.*

❗ **IMPORTANT:** Always make sure that you are installing IIS on the system designated as the Pulse server. If you are setting up a new server, IIS must always be installed before the .NET Framework.


❗ **IMPORTANT:** Do not run IIS on a domain controller or a backup domain controller.

📄 **NOTE:** IIS is a built-in component of the Windows OS. For Windows Server 2012, the OS lets you install IIS 8.0.


1. Log in to the system that you selected to be the Pulse web server using one of these accounts:
 - **Built-in Administrator Account for Windows Server** This account has full administrative privileges and is included with the operating system by default. See the person who installed the server's operating system for the user name and password.OR
 - **A Local User Account with Administrative Privileges** If available in your environment, you can use a local administrator account for the server. With a local account, the server checks its own files to authenticate the log in and determine if the user has the appropriate administrative rights to install software on the system. This is different from a network domain account.
2. Determine if IIS is installed on the operating system. To do this, press the **Windows** key on your keyboard.




Click the **Server Manager** tile to open the Server Manager.

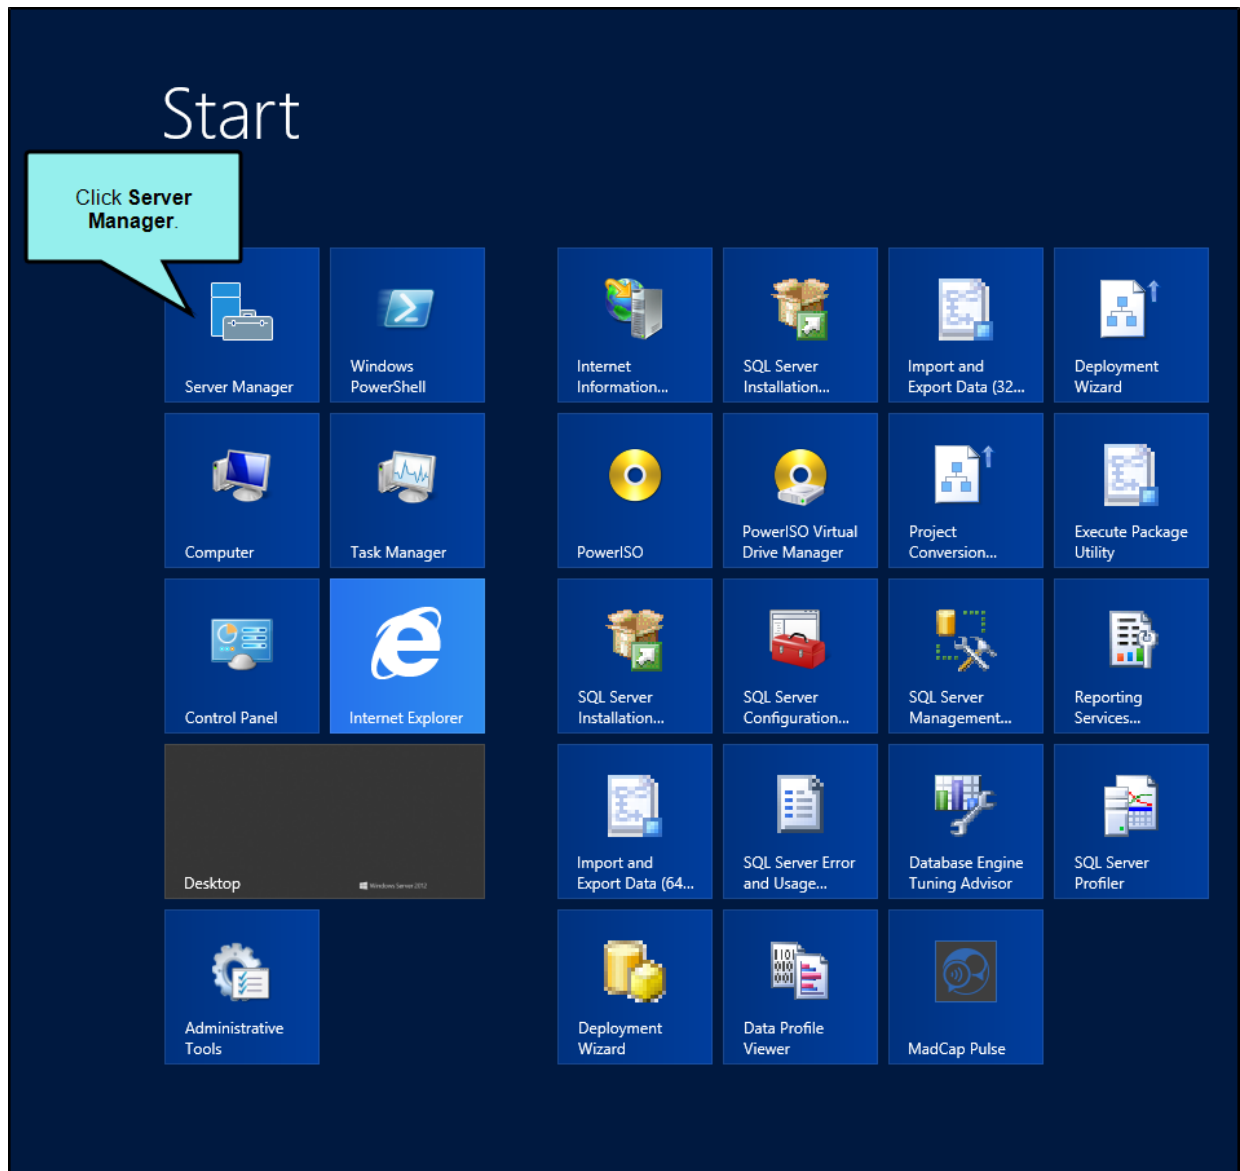

If IIS is installed, this should be indicated on the Server Manager.

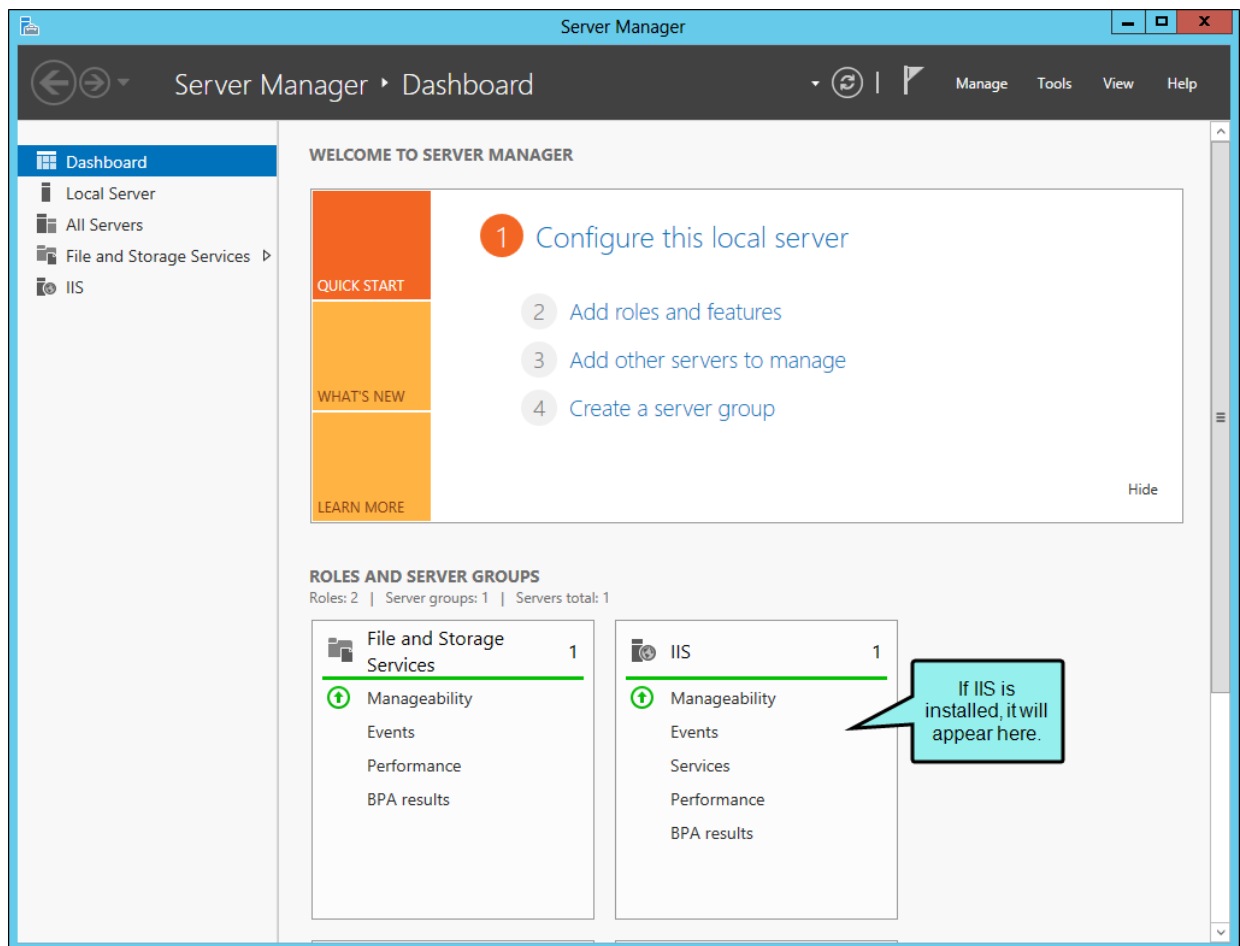

3. If you need to install IIS on the server, add the **Web Server (IIS)** role service:
 - a. In the Server Manager, click **Add roles and features**.

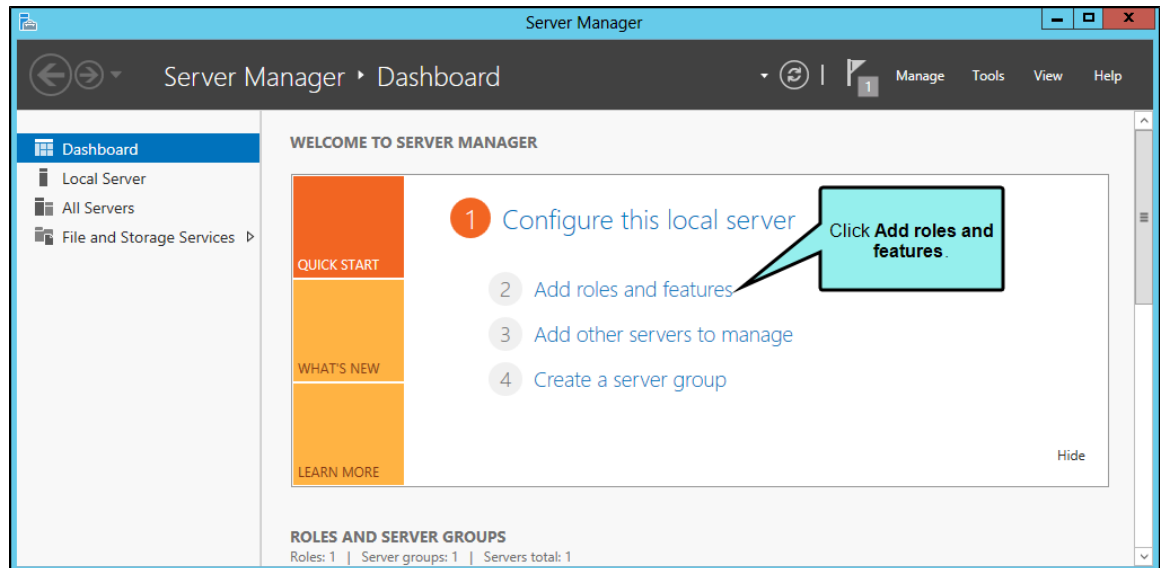


The Add Roles and Features Wizard opens.

- b. Click **Next..**


- c. Make sure **Role-based or feature-based installation** is selected. Then click **Next**.

The local server should be listed.

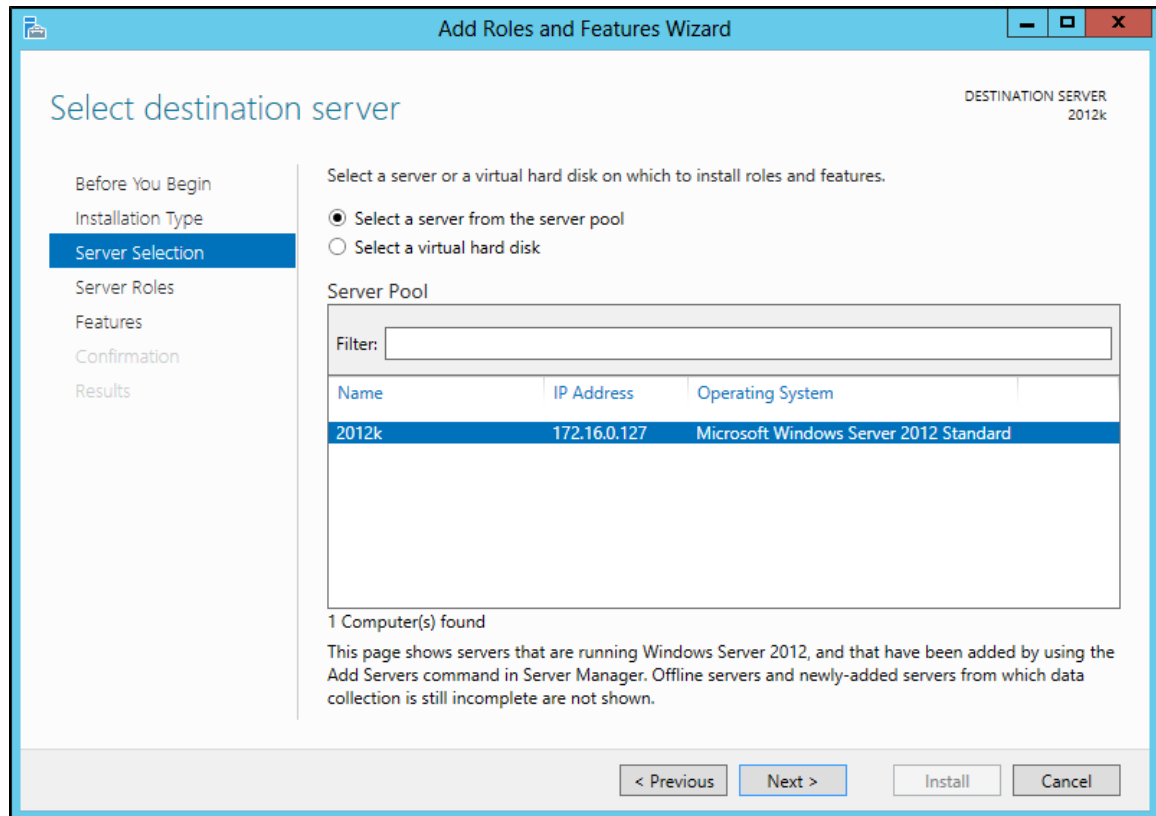


- d. Click **Next**.. The list of roles is shown.

- e. Scroll down and place a check mark in the **Web Server (IIS)** box.

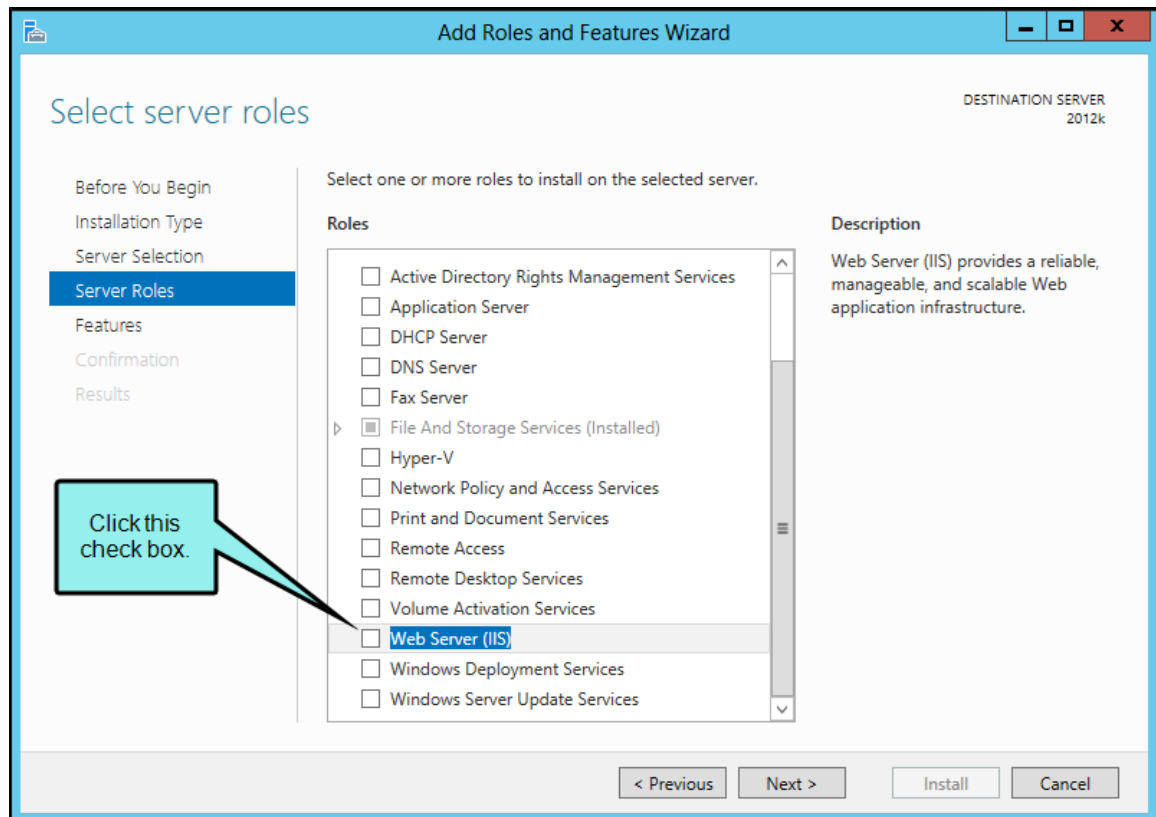

A dialog opens.

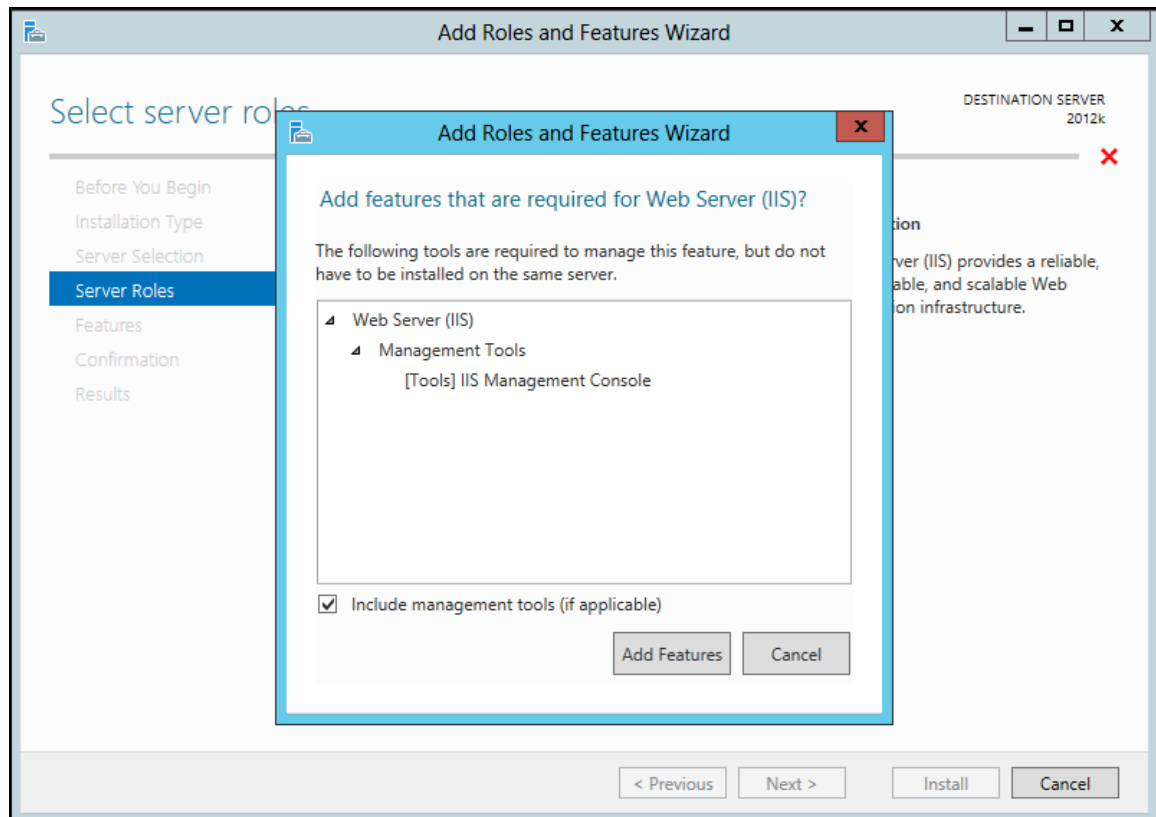

- f. Click **Add Features**.

The Web Server (IIS) check box now has a check mark.

- g. Click **Next**.

By default you should see options for .NET 3.5 and .NET 4.5. Only the option for .NET 4.5 should be selected.

- h. Scroll down and select **Windows Identity Foundation 3.5**.

- i. Click **Next**.

- j. Click **Next** again.

- k. Place a check mark next to all of the role services in the list below. When finished, click **Next**.

Before You Begin

Server Roles

Web Server (IIS)

Role Services

Confirmation

Progress

Results

Select the role services to install for Web Server (IIS):

Role services:

☒ Digest Authentication

☐ Client Certificate Mapping Authentication

☐ IIS Client Certificate Mapping Authentication

☐ URL Authorization

☒ Request Filtering

☐ IP and Domain Restrictions

☐ Performance

☒ Static Content Compression

☒ Dynamic Content Compression

☐ Management Tools

☒ IIS Management Console

☐ IIS Management Scripts and Tools

☐ Management Service

☐ IIS 6 Management Compatibility

☒ IIS 6 Metabase Compatibility

☐ IIS 6 WMI Compatibility

☐ IIS 6 Scripting Tools

☐ IIS 6 Management Console

☐ FTP Server

☐ FTP Service

☐ FTP Extensibility

[More about role services](#)

Select the desired services using the recommended role services listed below. *Role services required by Pulse are marked with an asterisk (*)*.

Role Services Category	Select These Role Service Check Boxes
Common HTTP Features	*Static Content Default Document Directory Browsing HTTP Errors
Application Development	*ASP.NET 4.5 .NET Extensibility 4.5 ISAPI Extensions ISAPI Filters
Health and Diagnostics	HTTP Logging
Security	*Basic Authentication *Windows Authentication Request Filtering
Performance	Static Content Compression Dynamic Content Compression
Management Tools	IIS Management Console
IIS 6 Management Compatibility	*IIS 6 Metabase Compatibility

- l. Confirm your selections and click **Install**
- m. After the installation finishes, click **Close**

Installing Microsoft SQL Server

Information for Network Administrators

You can install a Microsoft SQL Server instance to use as the Pulse database. This instance can reside on the Pulse web server (this is the server running IIS) or on a different system with access to the Pulse web server.

This chapter discusses the following:

Before You Begin31

Installing SQL Server32

Before You Begin

To begin the installation, log in to the server where you will be installing the SQL database instance. You must use the appropriate access credentials:

- **Built-In Administrator Account for Windows Server** This is the account that lets you run programs as an administrator, before a user account is created.

OR

- **Windows User Account with Local Administrator Privileges** This account must have local administrator privileges for the server.

Installing SQL Server


You must install a supported version of Microsoft SQL Server:

- Microsoft SQL Server 2012
- Microsoft SQL Server 2008R2
- Microsoft SQL Server 2008

You can use a full or express version of any of these, but the full version is recommended because it can store more data.

Regardless of your operating system (Windows Server 2012, 2008R2, or 2008), you should be able to use any of the versions of Microsoft SQL Server listed above. Following are general steps for all three. For the most part, the steps are identical for each, though there may be some minor variations.

It is recommended that you apply all available service packs and critical updates to your operating system prior to the installation.

 **IMPORTANT:** If you are running Windows Server 2012 or are installing Microsoft SQL Server 2012, be sure you have the most current version of Pulse. Microsoft SQL Server 2012 and Windows Server 2012 are not compatible with earlier versions of Pulse.

HOW TO INSTALL MICROSOFT SQL SERVER

1. Obtain the installation media.
2. Log in to the server as an administrator.
3. Run the setup program from a CD or the network.


IF YOU ARE INSTALLING FROM A NETWORK

If the Do You Want to Run This File dialog appears, click **Run**.


If prompted by Windows User Account Control message asking if you want to allow the program to make changes to this computer, click **Yes**.

Depending on your specific environment, you may also be prompted for access credentials to access the setup program on your network share.

4. For SQL Server 2008: If you are performing the installation on a system Windows Server 2008 R2, the Program Compatibility Assistant appears. Read the message and then click **Run Program**.

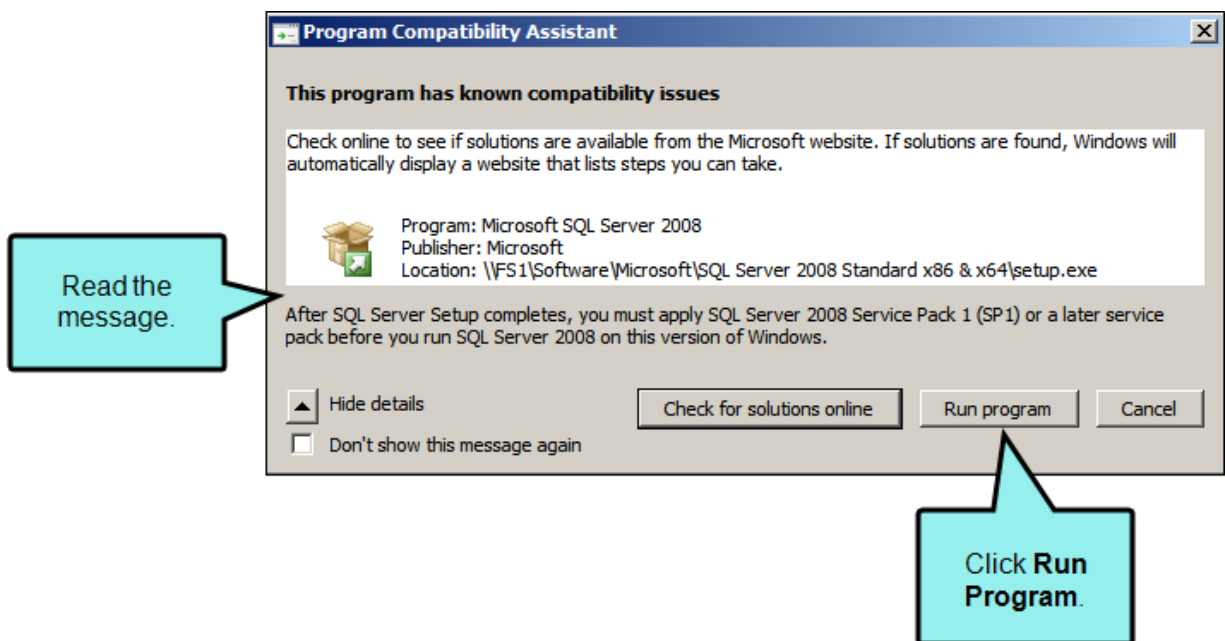


5. In the Planning page of the Installation Center, review the information. When ready to proceed, click **Installation** in the left pane.

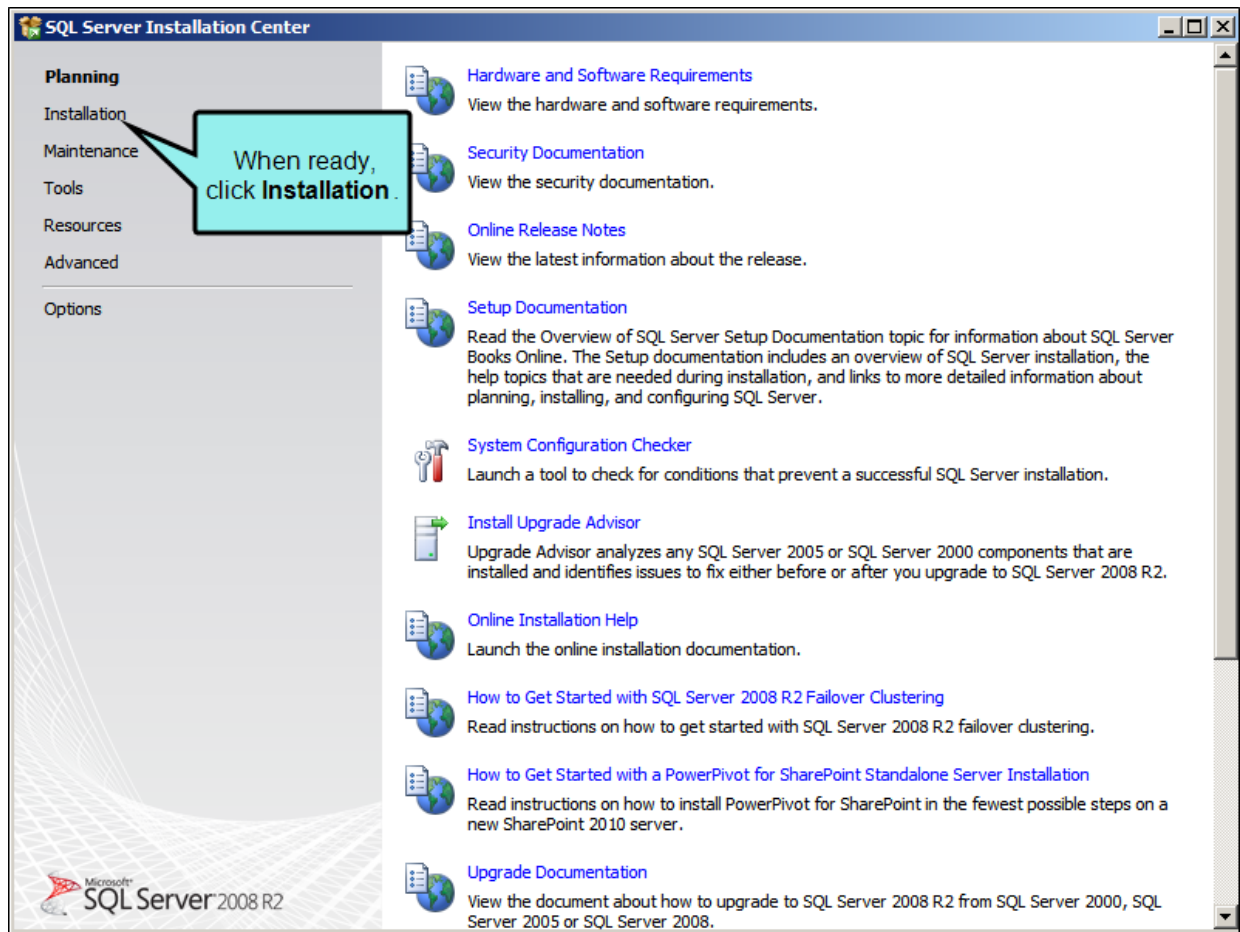

6. For SQL Server 2008 R2 In the Installation page, click the **New installation or add features to an existing installation** option.

For SQL Server 2008 and 2012 In the Installation page, click the **New SQL Server stand-alone installation or add features to an existing installation** option.

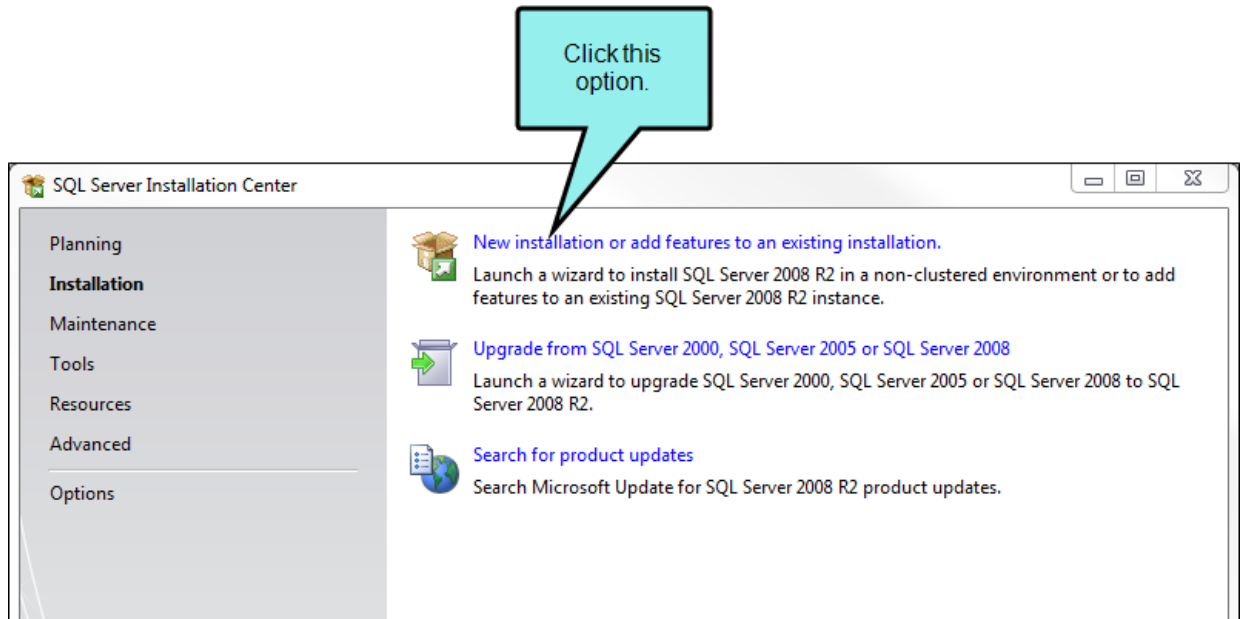

If a dialog opens with a security warning, click **Run**.


The wizard checks the system to detect potential issues.

7. In the Setup Support Rules dialog, do one of the following:

- If the wizard finds any failed, warning, or skipped rules, click **Show Details** and/or click **View detailed report**. Any failures must be resolved before proceeding. When resolved, click **Re-run** to perform another system check.

OR

- If wizard determines that the system passes the system check, click **OK**.

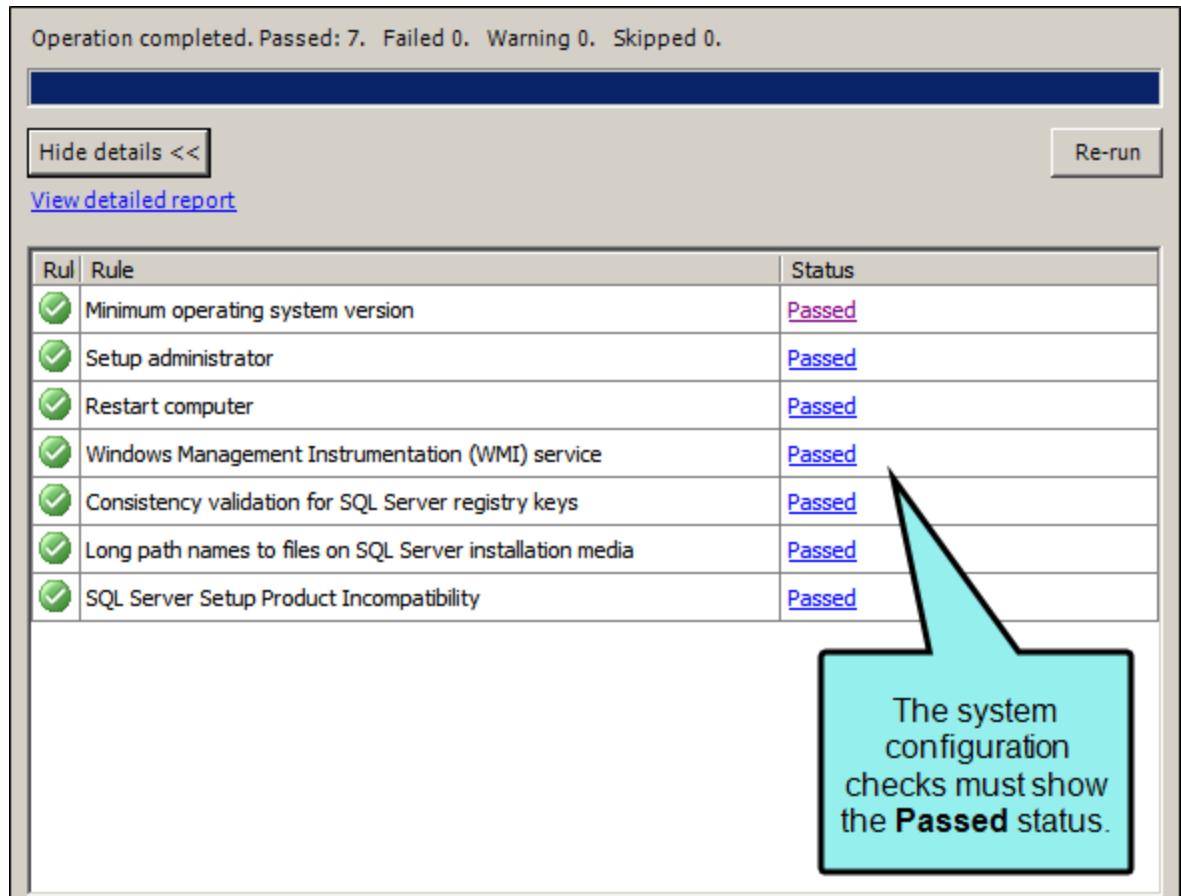

The wizard ensures that you have a valid product key.

- ### Product Key

Specify the edition of SQL Server 2008 R2 to install.

Product Key

License Terms

Setup Support Files

Validate this instance of SQL Server 2008 R2 by entering the 25-character key from the Microsoft certificate of authenticity or product packaging. You can also specify a free edition of SQL Server, such as Evaluation or Express. Evaluation has the largest set of SQL Server features, as documented in SQL Server Books Online, and is activated with a 180-day expiration. To upgrade from one edition to another, run the Edition Upgrade Wizard.

☐ Specify a free edition:


Evaluation

☒ Enter the product key:

XXXXXXXXXX-XXXXXX-XXXXXX-XXXXXX-XXXXXX


Enter your Product Key from Microsoft.

- e. (Optional) If you wish to send feature usage data, select the check box at the bottom of the dialog.

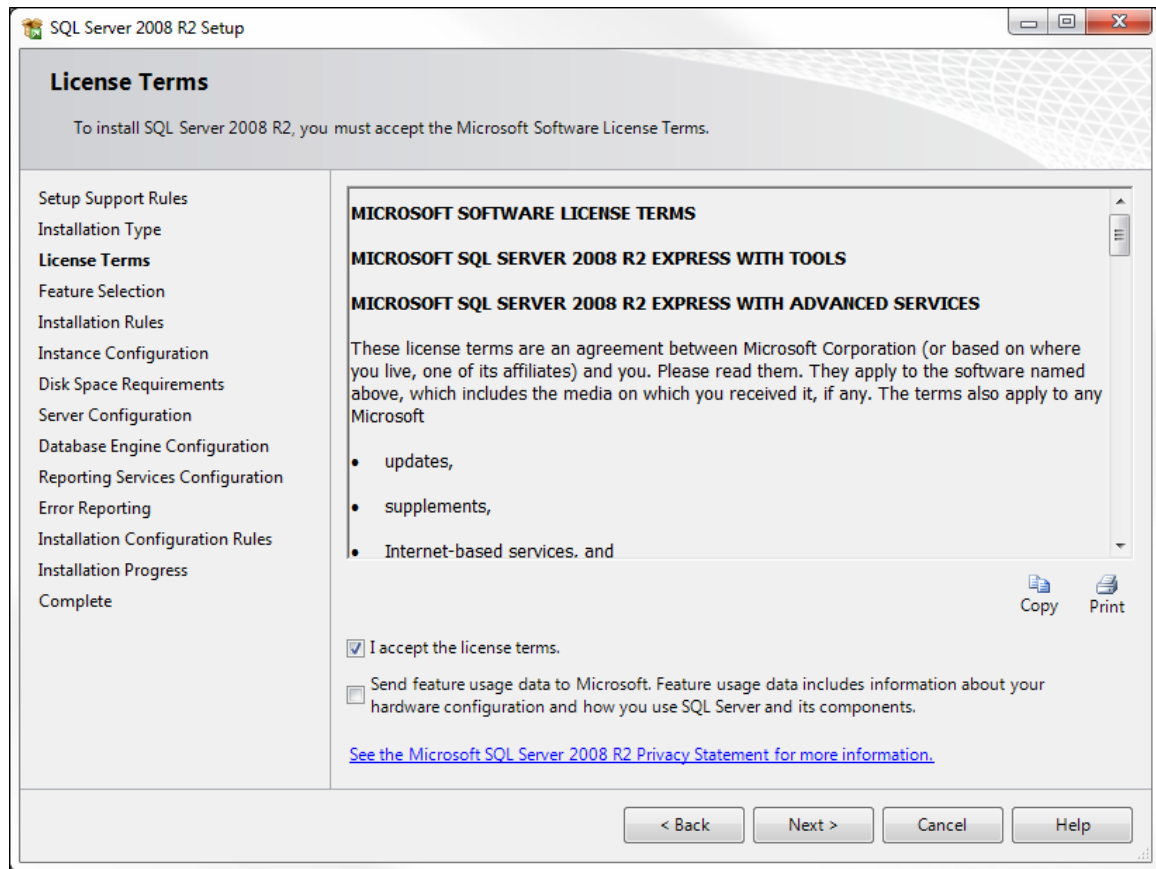

- f. Click **Next**. (If your system requires updates, you may see a page at this point showing available updates. You can click the check box to include updates in the installation and click **Next**.)
- g. Depending on the version of SQL Server, you may need to click **Install** at this point. The setup program performs a system check to detect potential issues.

9. In the Setup Support Rules page, do one of the following:
- If potential issues are found, click **Show Details**. You can also click **View detailed report** for more information. Issues must be resolved before proceeding. When resolved, click **Re-run** to perform another check.

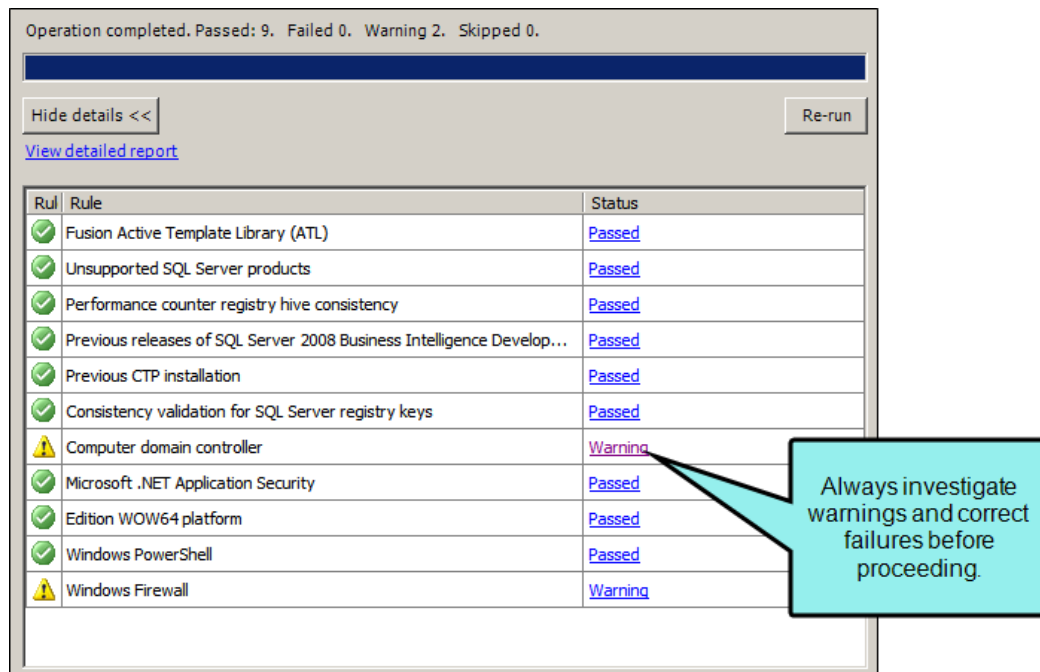

OR

- If the Setup Support Rules indicates the system has passed, click **Next**.
10. In the Setup Role page, choose the appropriate installation type. Then click **Next** to proceed.

HOW TO CHOOSE AN INSTALLATION TYPE

If you are not familiar with SQL Server, it is recommend that you choose the following:

- a. Select **SQL Server Feature Installation**. This lets you choose the features to install.
- b. Click **Next** to open the Feature Selection page.

11. In the Feature Selection page, place check marks next to the desired features. Then click Next.


HOW TO INSTALL THE MINIMUM REQUIRED FEATURES

At a minimum, you should:


Use the default shared feature directory.

- a. Select these check boxes:
- Database Engine Services
 - SQL Server Replication
 - Full-Text Search or Full-Text Search and Semantic Extractions for Search
 - Management Tools - Basic
 - Management Tools - Complete
 - SQL Client Connectivity SDK

SQL SERVER 2008/2008R2 EXAMPLE

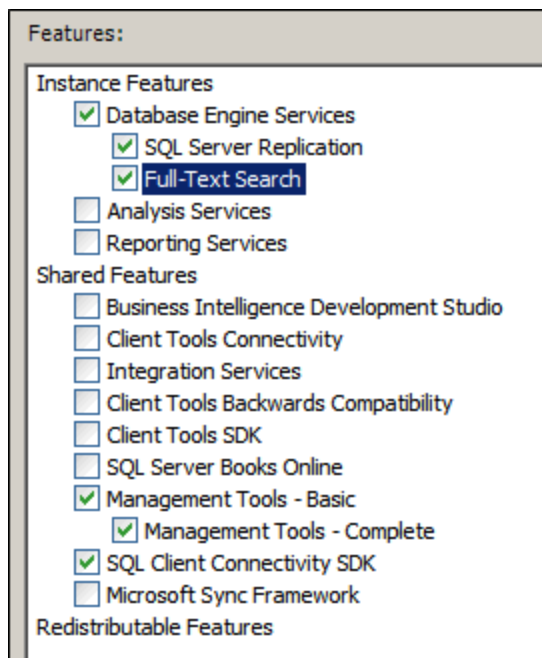

SQL SERVER 2012 EXAMPLE

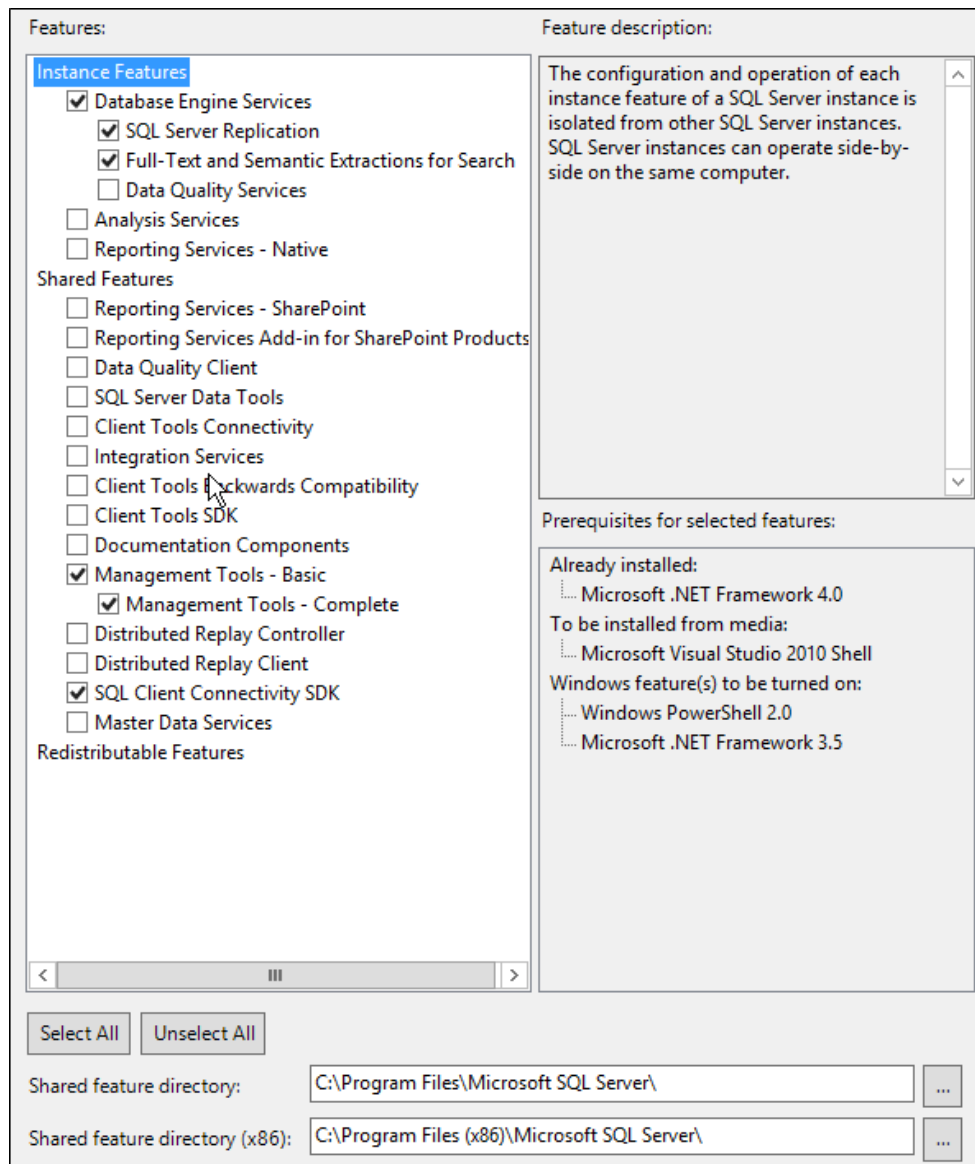

- Use the default shared feature directory.
- Click **Next**.

The setup program checks the system for potential issues.

- In the Installation Rules page, do one of the following:

- If any issues are found, click **Show Details**. You can also click **View detailed report** for more information. Issues must be resolved before proceeding. When resolved, click **Re-run** to perform another check.

OR

- If all of the system configuration checks have passed, click **Next**.

The Instance Configuration page opens.

13. In the Instance Configuration page, select one of these buttons:

- **Default instance** If this is the first time SQL Server instance is being installed on the system, use the default instance name. This is typically MSSQLSERVER.

OR

- **Named instance** If you do not want to use the default instance, select this button and type a unique name in the **Instance ID** box. For example, type `PULSE01`.

Instance Configuration	
Specify the name and instance ID for the instance of SQL Server. Instance ID becomes part of the installation path.	
Setup Support Rules Installation Type License Terms Feature Selection Installation Rules Instance Configuration Disk Space Requirements Server Configuration Database Engine Configuration Reporting Services Configuration Error Reporting	<input type="radio"/> Default instance
	<input checked="" type="radio"/> Named instance: <input type="text" value="PULSE01"/>
	Instance ID: <input type="text" value="PULSE01"/>
	Instance root directory: <input type="text" value="C:\Program Files\Microsoft SQL Server\"/>
	SQL Server directory: <input type="text" value="C:\Program Files\Microsoft SQL Server\MSSQL10_50.PULSE01"/>
	Reporting Services directory: <input type="text" value="C:\Program Files\Microsoft SQL Server\MSRS10_50.PULSE01"/>

14. Click **Next** to open the Disk Space Requirements page and then:
 - If your system does not meet the disk space requirements, review the Disk Usage Summary and address any issues before proceeding.

OR

 - If your system meets the disk space requirements, click **Next**.
15. In the Server Configuration page, under the **Service Accounts** tab you must provision service accounts to each listed SQL service. When finished, click **Next**.

HOW TO PROVISION SQL SERVICE ACCOUNTS

⚠ IMPORTANT: Always contact your SQL Server Administrator and/or Windows Administrator for the appropriate service accounts to use in your environment.

- a. Provision the appropriate accounts to the list of SQL services.
- b. Make sure the **Startup Type** for each service is set as follows, depending on the version of SQL Server:

Service	Account Name/Password	Startup Type
SQL Server Agent	<p>SQL Server 2008/2008R2 There is no default account for this service. The account you use depends on your security requirements.</p> <p>SQL Server 2012 This account defaults to NT Service\SQLAGENT\$(Name of Instance).</p> <p>There is no default account for this service. The account you use depends on your security requirements.</p>	Automatic
SQL Server Database Engine	<p>SQL Server 2008/2008R2 The account you use depends on your security requirements.</p> <p>SQL Server 2012 This account defaults to NT Service\MSSQL\$(Name of Instance).</p> <p>The account you use depends on your security requirements.</p>	Automatic

Service	Account Name/Password	Startup Type
SQL Full-text Filter Daemon Launcher	<p>SQL Server 2008/2008R2 This account defaults to NT AUTHORITY\LOCAL SERVICE.</p> <p>The account you use depends on your security requirements. Microsoft recommends using a low privilege account.</p> <p>SQL Server 2012 This account defaults to NT Service\MSSQLFDLauncher\$(Name of Instance).</p>	Manual
SQL Server Browser	<p>The default logon account is NT AUTHORITY\LOCAL SERVICE.</p> <p>You will typically keep this setting.</p>	Automatic

SQL SERVER2008 EXAMPLE

SQL Server 2008 Setup

Server Configuration
Specify the configuration.

Setup Support Rules
Feature Selection
Instance Configuration
Disk Space Requirements
Server Configuration
Database Engine Configuration
Error and Usage Reporting
Installation Rules
Ready to Install
Installation Progress
Complete

Service Accounts | Collation

Microsoft recommends that you use a separate account for each SQL Server service.

Service	Account Name	Password	Startup Type
SQL Server Agent			Automatic
SQL Server Database Engine			Automatic

Use the same account for all SQL Server services

These services will be configured automatically where possible to use a low privilege account. On some older Windows versions the user will need to specify a low privilege account. For more information, click Help.

Service	Account Name	Password	Startup Type
SQL Full-text Filter Daemon Launcher	NT AUTHORITY\LOCAL S...		Manual
SQL Server Browser	NT AUTHORITY\LOCAL S...		Automatic

< Back Next > Cancel Help

SQL SERVER 2008R2 EXAMPLE

Service Accounts

Collation

Microsoft recommends that you use a separate account for each SQL Server service.

Service	Account Name	Password	Startup Type
SQL Server Agent	NT AUTHORITY\SYSTEM		Automatic
SQL Server Database Engine			Automatic
SQL Full-text Filter Daemon Launcher	NT AUTHORITY\LOCAL S...		Manual
SQL Server Browser	NT AUTHORITY\LOCAL S...		Automatic

Use the same account for all SQL Server services

SQL SERVER 2012 EXAMPLE

Service Accounts

Collation

Microsoft recommends that you use a separate account for each SQL Server service.

Service	Account Name	Password	Startup Type
SQL Server Agent	NT Service\SQLAgent\$PULSE01		Automatic
SQL Server Database Engine	NT Service\MSSQL\$PULSE01		Automatic
SQL Full-text Filter Daemon Launcher	NT Service\MSSQLFDLauncher\$PU...		Manual
SQL Server Browser	NT AUTHORITY\LOCAL SERVICE		Automatic

16. In the Database Engine Configuration page, under the **Account Provisioning** tab (SQL Server 2008/2008 R2) or the **Server Configuration** tab (SQL Server 2012), choose one of these options:

- **Windows authentication mode** If you choose this option and are not logged in as an administrator, it is recommended that you add an account that has sufficient permissions to perform all of the needed SQL administrative tasks. If you are logged in as an administrator, it is recommended you also click **Add Current User**.

SQL SERVER 2008/2008R2 EXAMPLE

The screenshot shows the 'Account Provisioning' tab in the SQL Server Enterprise Manager. The 'Authentication Mode' section has 'Windows authentication mode' selected. Below it, there are fields for 'Enter password' and 'Confirm password' for the SQL Server system administrator (sa) account. The 'Specify SQL Server administrators' list contains one entry: 'S:\N-PULSE01\Administrator (Administrator)'. At the bottom, there are three buttons: 'Add Current User', 'Add...', and 'Remove'. Two callout boxes are present: one pointing to the 'Windows authentication mode' radio button with the text 'Select Windows authentication mode.', and another pointing to the 'Add Current User' button with the text 'Click Add Current User.'

Account Provisioning | Data Directories | FILESTREAM

Specify the authentication mode and administrators for the Database Engine.

Authentication Mode

☒ Windows authentication mode

☐ Mixed Mode (SQL Server authentication and Windows authentication)

Specify the password for the SQL Server system administrator (sa) account.

Enter password:

Confirm password:

Specify SQL Server administrators

S:\N-PULSE01\Administrator (Administrator)
--

SQL Server administrators have unrestricted access to the Database Engine.

Add Current User | Add... | Remove

SQL SERVER 2012 EXAMPLE

Select Windows authentication mode.

Server ConfigurationData DirectoriesFILESTREAM

Specify the authentication mode and administrators for the Database Engine.

Authentication Mode

☒ Windows authentication mode

☐ Mixed Mode (SQL Server authentication and Windows authentication)

Specify the password for the SQL Server system administrator (sa) account.

Enter password:

Confirm password:

Specify SQL Server administrators

2012R\Administrator (Administrator)

SQL Server administrators have unrestricted access to the Database Engine.

Add Current User

Add...

Remove

Click Add Current User.

- **Mixed Mode (SQL Server authentication and Windows authentication)** If you choose this option, you must specify the password to use for the SQL Server system administrator account.

The screenshot shows the 'Account Provisioning' tab of the SQL Server Enterprise Setup wizard. The 'Authentication Mode' section has two radio buttons: 'Windows authentication mode' and 'Mixed Mode (SQL Server authentication and Windows authentication)'. The 'Mixed Mode' option is selected. Below this, there are two password fields: 'Enter password:' and 'Confirm password:', both containing masked characters. A list box titled 'Specify SQL Server administrators' contains one entry: 'SJM-PULSE01\Administrator (Administrator)'. At the bottom, there are three buttons: 'Add Current User', 'Add...', and 'Remove'. Three callout boxes provide instructions: 'Select Mixed Mode.' points to the selected radio button; 'Specify the password for the SQL Server system administrator account.' points to the password fields; and 'Click Add Current User.' points to the 'Add Current User' button.

Account Provisioning | Data Directories | FILESTREAM

Specify the authentication mode and administrators for the Database Engine.

Authentication Mode

☐ Windows authentication mode

☒ Mixed Mode (SQL Server authentication and Windows authentication)

Specify the password for the SQL Server system administrator (sa) account.

Enter password:

Confirm password:

Specify SQL Server administrators

SJM-PULSE01\Administrator (Administrator)

SQL Server administrators have unrestricted access to the Database Engine.

Add Current User | Add... | Remove


Select Mixed Mode.


Specify the password for the SQL Server system administrator account.

Click Add Current User.

When finished, click **Next**.

17. In the Error Reporting page, select whether or not you want to send error reports to Microsoft. This is your preference. Then click **Next**.
18. In the Installation Configuration Rules page, do the following:
 - If there are issues, you must address them before clicking **Next**.OR
 - If there are no issues, click **Next**.
19. In the Ready to Install page, click **Install**. A progress indicator shows you the status of the process.
20. When the installation is complete, you will see the "Installation Succeeded" message. Click **Close**.

 **NOTE:** If a failure occurs, troubleshooting information may be available on the MadCap Software knowledge base at: <http://kb.madcapsoftware.com/>

 **NOTE:** You may also want to check with your SQL Server Administrator about any errors you experience during installation.

Installing and Activating Pulse

Information for Network Administrators

After preparing the Pulse web server and database server for the installation process, you can install Pulse.

This chapter discusses the following:

- List of Pulse Components52
- List of Windows Service Applications 53
- Installing the Pulse Server Application54
- Activating Pulse 60

List of Pulse Components

The Pulse setup program installs the following components and features on your server:

- **Pulse Server Application** This is the server application that you install on the Pulse web server. Pulse Administrators use this tool to perform the initial server configuration.
- **Pulse Dashboard** This is the web dashboard that Pulse Administrators use to view different configuration settings and to manage the embedded discussion forms in the output. Registered users can access the dashboard using the Pulse URL.
- **Community Tab and Embedded Discussion Forms** This is the Community tab (optional) and the embedded discussion form that integrates with your published Flare output. It gives users the ability to share knowledge and expertise by posting status updates, asking and responding to questions about topics, creating articles, and more.

List of Windows Service Applications

Pulse runs the following Windows service applications:


- **MadCap Pulse Management Service** This service supports the Pulse application.
- **Pulse Service** This service also supports the Pulse application.
- **RabbitMQ** This service supports communication between IIS and SQL Server. It also monitors the amount of RAM on the server. When free space becomes low, this service raises alarms and block connections for the server.

Installing the Pulse Server Application


Do the following on the web server (this is the server running IIS):

HOW TO INSTALL THE PULSE SERVER APPLICATION

1. Install the prerequisite software. See "Installing the Prerequisites" on page 18.
2. Install a Microsoft SQL Server instance for the Pulse database. See "Installing Microsoft SQL Server" on page 30.
3. Obtain the installation media and a license code from MadCap Software:
 - **CD** Insert the installation CD.
 - **Online** Download the setup program using the link that you received from MadCap Software. .

 **NOTE:** You can obtain the Pulse license code from your MadCap Software Sales Representative.


4. Log on to the server running IIS using an account that has administrator privileges.
5. Right-click the Pulse setup program and select **Install** from the context menu. This is the Windows Installer Package file named "SetupMadCapPulse.msi."

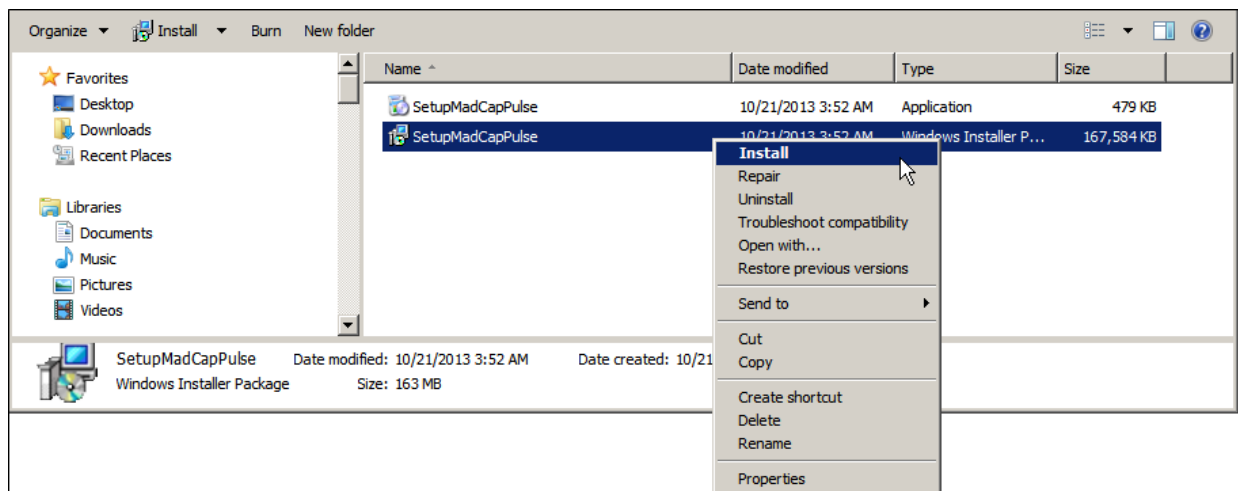


IF YOU ARE NOT LOGGED IN AS AN ADMINISTRATOR

If the Install context menu command does not appear, you are not logged in as an administrator. You can use the steps below to run the program as an administrator:

- a. Navigate to the Pulse setup program. This is the Windows installer package named "SetupMadCapPulse.msi."
 - b. Right-click the setup program and select **Run as Administrator** from the context menu.
 - c. If prompted by Windows User Account Control (UAC), click **Yes** or **Continue**.
 - d. If you are logged in with a different account, you may be prompted to enter the user name and password for the administrator account. After entering the account information, click **Yes**.
6. When the Welcome page of the MadCap Pulse Setup Wizard appears, click **Next**.
 7. Select the **I Agree** option to accept the terms of the license agreement. Then click **Next**.
 8. In the **Select Installation Folder** page, browse to the desired installation folder or accept the default folder. Then click **Next**.

 **NOTE:** To view a list of drives where you can install Pulse and to see the available/required space on the drives, click the **Disk Cost** button.

 **NOTE:** To make the Pulse application available to any user who logs into the server, click **Everyone**. To make the program available only to the logged in user account, click **Just Me**.


9. In the **Confirm Installation** page, click **Next**. A progress indicator shows the status of the process.

IF YOU ARE PROMPTED TO INSTALL THE VISUAL C++ 2010 REDISTRIBUTABLE

If the Microsoft Visual C++ 2010 Redistributable is not installed on the server, a dialog will prompt you to install it. Here is how you proceed through the system check:


In the Trial/Activation dialog, do one of the following in the **Provide Your License Code** field:

- a. Place a check mark in the **I have read and accept license terms** box. Then click **Install**. A progress indicator appears to show you the status.
- b. If the following message appears, click **Retry**.

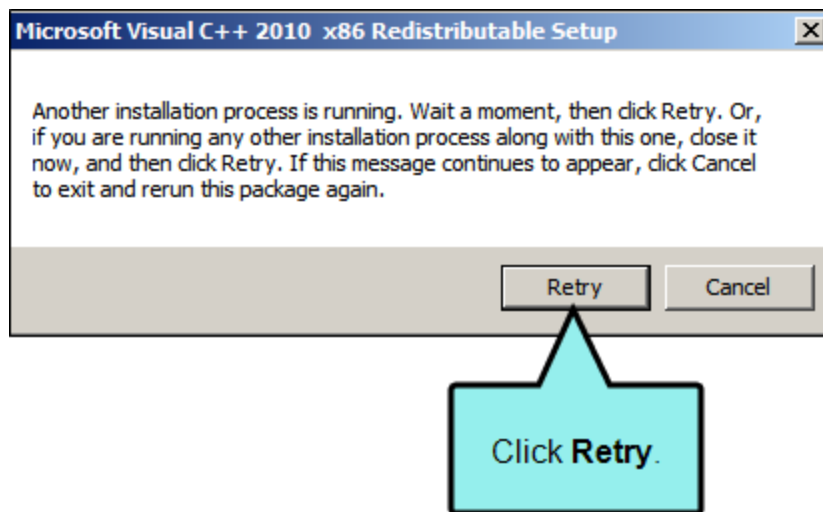


c. Depending on your system, one of the following occurs:

- If you do not have the correct distributable, you will be prompted to install it.
- If the following message reappears, click **Cancel**. In most situations, this means the setup program has detected a newer version of Visual C++ on your system and is installing the required elements. The remaining steps show you how to proceed.

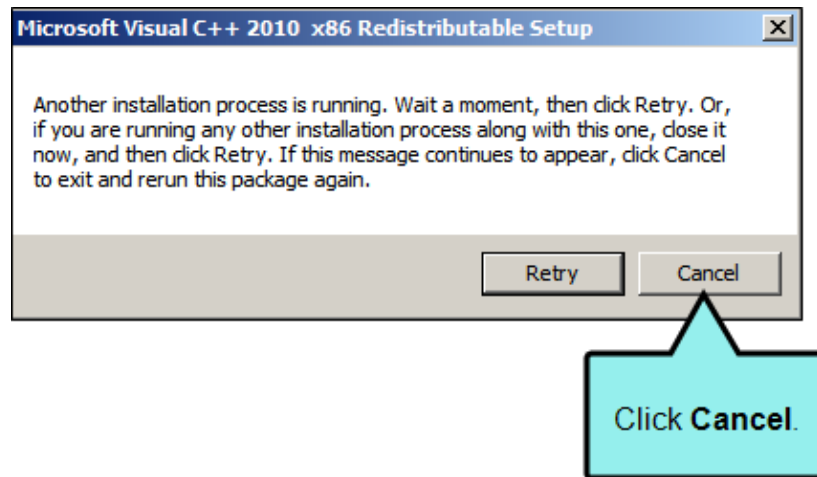



d. In the Installation Did Not Succeed dialog, click the **log file** link.

- e. In the Installation Log, place a check mark in the **Verbose** box.

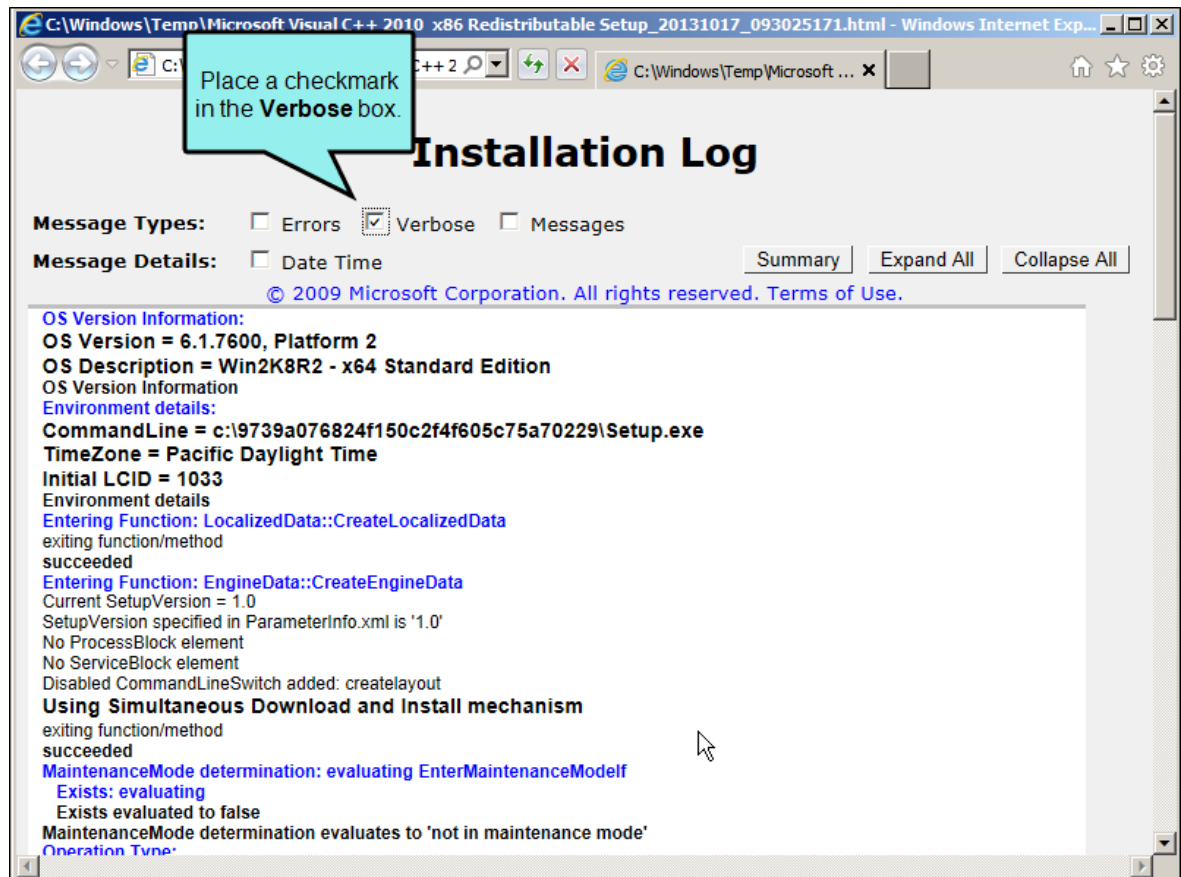


- f. Scroll down the log and determine if the operating system is running a newer version of the redistributable:

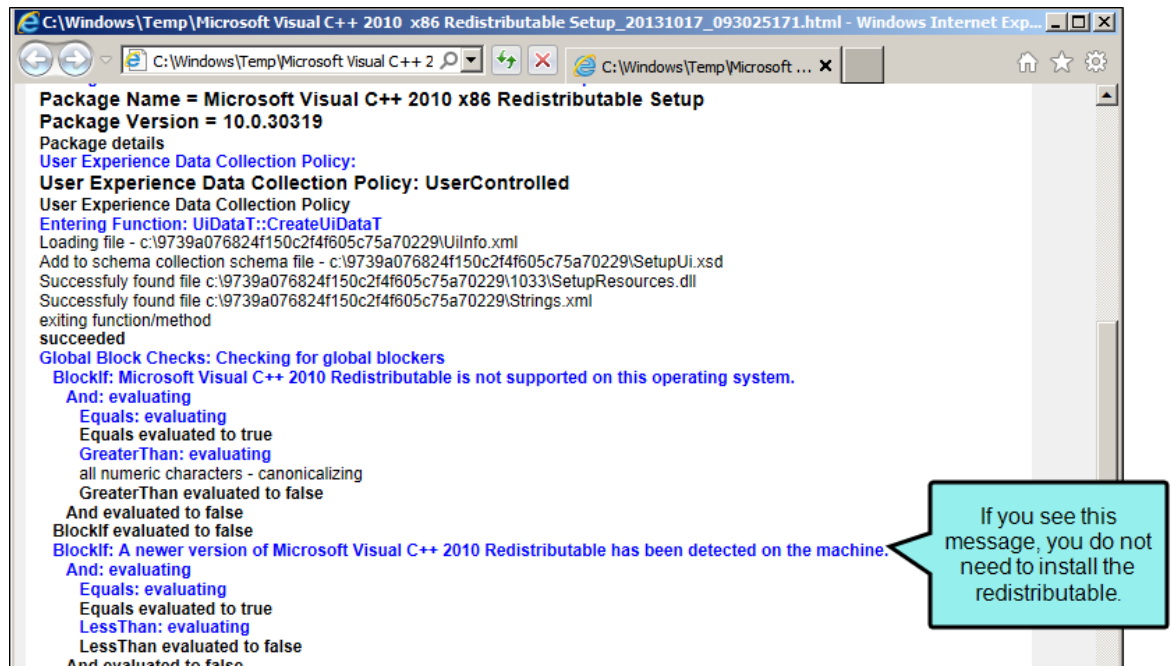

 **NOTE:** If you are running a newer version of the redistributable, you do not need to install version 2010.

- g. Close the Installation Log.
- h. Click **Finish** in the Installation Did Not Succeed dialog.
10. In the **Installation Complete** page, click **Close**..

 **NOTE:** After completing the installation, use Windows Update to run any available .NET Framework updates on the server. For information about Windows Update, visit this Microsoft link: <http://windows.microsoft.com/en-us/windows/help/windows-update>.

Activating Pulse

After successfully installing Pulse, you must activate the product.

HOW TO ACTIVATE PULSE

1. Log on to the server running IIS using an account that has administrator privileges.
2. Launch the Pulse server application.

HOW TO LAUNCH THE PULSE SERVER APPLICATION

- **From the Desktop** Hold down the **Shift** key and right-click to select **MadCap Pulse** from a context menu. To use this method, you must be logged in as an administrator.

OR

- **On 64-bit Systems** Double-click the **Pulse.exe** file. The path to this file is C:\Program Files\MadCap Software\MadCap Pulse\Pulse.app\Pulse.exe.

OR

- **On 32-bit Systems** Double-click the **Pulse.exe** file. The path to this file is C:\Program Files (x86)\MadCap Software\MadCap Pulse\Pulse.app\Pulse.exe.

3. In the Trial/Activation dialog, do one of the following in the **Provide Your License Code** field:

- Type the license code that you received from MadCap Software.

OR

- Copy the license code from your download notification email and paste it into the field. A check mark appears when you enter a valid code.

madcap
PULSE trial / activation

☒ Provide your license code

Enter the license code or copy and paste it from the download notification email.

☐ Use as trial

30
Days Left

To purchase a license...
Purchase Online at MadCapSoftware.com or contact Sales

- Call: +1 858.320.0387 opt. 1
- Email: Sales@Madcapsoftware.com

PURCHASE ONLINE

BACK **NEXT** **FINISH**

A check mark appears when you enter a valid code.

4. Click **Next**.

5. In the Enter Your Information page, type your name and email address in the fields provided.

6. Click **Next**.

7. Select the desired activation method:

- **Internet Activation** If you are connected to the Internet, select this option. If you are behind a firewall, you may need to enter your Proxy Server information.

HOW TO ACTIVATE WITH A PROXY SERVER

- a. If you are behind a firewall, place a check mark in the **Use Proxy Server** box:
- b. Enter the required proxy server and authentication information for your network.
- c. Click **Next**.

OR

- **Manual Activation** To activate by email, select this option. Then enter the license code and machine ID.

8. Click **Next**.


9. Copy and paste the activation code included in the email that was sent to the provided address.

10. Click **Next**.

The system activates your product.

IF YOU ENCOUNTER ACTIVATION ISSUES

If you encounter an activation issue, an error message similar to the one below appears. Take note of the error message text as it can help you troubleshoot the issue.

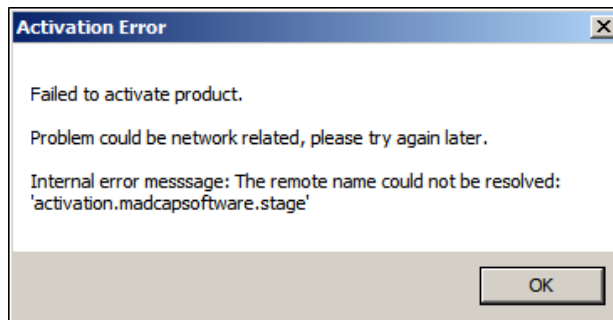

Possible issues that might be encountered during the activation process include:

- **Entering an Invalid License Code** Try re-entering your code to make sure it was typed correctly. If you have purchased other MadCap products, make sure the code you typed is

for the Pulse product.

- **Entering a License Code that Has Already Been Activated** If Pulse has already been activated on another system, you will need to deactivate it before using the license code on a different system.
- **Your System Cannot Communicate With the Activation Server** The system where you are installing Pulse is not able to communicate with the MadCap Activation Service. We suggest checking your network and Internet connection and after waiting a few minutes, try to activate the product again.
- **You Must Use a Proxy Server** If you are using the Internet Activation method, a notification message like the one below typically indicates that you will need to use a proxy server to access external URLs. To obtain your proxy server information, see your Network Administrator. Then try to activate your product again. If you experience an issue, the MadCap Software knowledge base has a helpful tip about registration behind a proxy server: <http://kb.madcapsoftware.com/default.htm#csid=GEN1004Z>

The Welcome page of the Pulse Configuration Wizard appears so you can configure Pulse for first time use. See "Pulse Server Configuration" on page 64.

CHAPTER 6

Pulse Server Configuration

AVAILABLE TO: Administrators only

After the Pulse server application is installed on the Pulse web server, use the desktop shortcut or the Programs menu in Windows to start the Pulse application.

This chapter discusses the following:

- Configuring Pulse for the First Time65
- Starting the Pulse Server Application 74
- Setting the PulseAdmin Password75
- Pulse Server Configuration Window76
- Importing Feedback Data85
- Updating Pulse86
- Uninstalling Pulse87

Configuring Pulse for the First Time

After you install and activate the Pulse server application, the Welcome page of the MadCap Pulse Configuration Wizard appears so you can perform an initial configuration.

HOW TO CONFIGURE PULSE FOR FIRST TIME USE

1. Install and activate Pulse as described in "Installing and Activating Pulse" on page 51.
2. If the MadCap Pulse Configuration Wizard is not already open, double-click the MadCap Pulse desktop shortcut.
3. In the Welcome page of the MadCap Pulse Configuration Wizard, click **Next**.
4. In the Select Web Site page, do the following:
 - a. **Select the Website for the Pulse Services** Select the website on the IIS Server that will be storing your Pulse data. By default, Pulse will use the "Default Web Site" in IIS.
 - b. **Pulse Server URL** This is the Site URL for the Pulse dashboard. Typically, it will consist of the protocol (http:// or https://), the IP address (or the machine name), and the Pulse directory.

☆ EXAMPLES

HTTP:

http://<ipaddress>/pulse

http://<servername>/pulse

Secure HTTP:

https://<ipaddress>/pulse

https://<servername>/pulse

- c. Click **Next**.

5. In the Select SQL Server page, do the following:


- a. In the **SQL Server** drop-down list, select **Get list of SQL Servers**.


If the SQL Server Browser service is turned on, the program looks for all available SQL Servers in the Windows domain.

HOW TO TURN ON THE SQL SERVER BROWSER

If SQL Server Browser service is turned off, use these steps to turn it on:

- i. Start the SQL Server Configuration Manager.
- ii. Select **Start > Programs**. Then point to your version of SQL in the menu and select **Configuration Tools > SQL Server Configuration Manager**.
- iii. In the left pane, highlight **SQL Server Services**.
- iv. Right-click **SQL Server Browser** and select **Properties** from the context menu.
- v. On the **Service** tab, set the start mode to **Automatic** and click **OK**.
- vi. Right-click the **SQL Server Browser** again, and select **Start**.
- b. In the SQL Server drop-down list, select the desired server. If instead you enter a server manually, click **Connect**.

 **NOTE:** You can alternatively enter the IP Address or Computer Name of the server in the **SQL Server** field. Use this format: <Server Name>\<SQL Instance> OR <IP Address>\<SQL Instance>

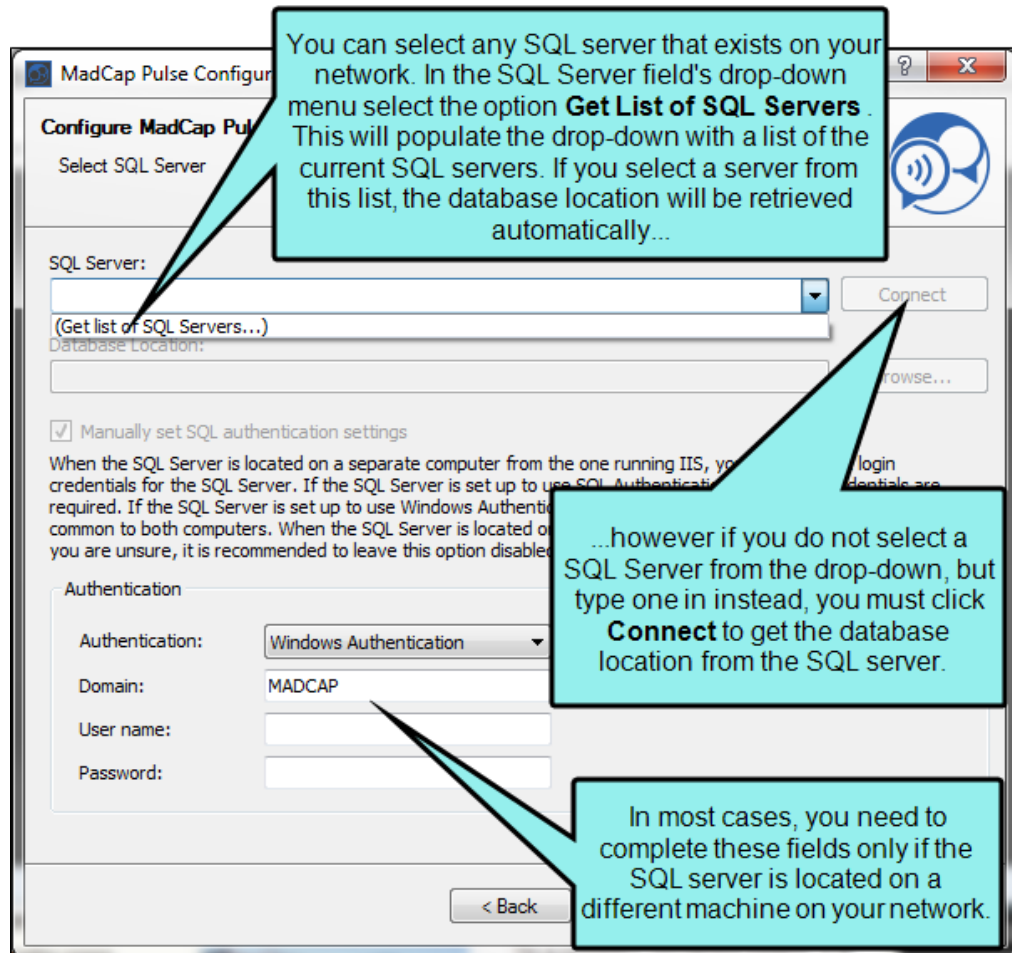

The screenshot shows the 'Configure MadCap Pulse' window, specifically the 'Select SQL Server' tab. The window includes a 'SQL Server' dropdown menu, a 'Database Location' field, a 'Connect' button, and an 'Authentication' section with fields for 'Authentication', 'Domain', 'User name', and 'Password'. A '< Back' button is at the bottom.

Callout 1 (top): You can select any SQL server that exists on your network. In the SQL Server field's drop-down menu select the option **Get List of SQL Servers**. This will populate the drop-down with a list of the current SQL servers. If you select a server from this list, the database location will be retrieved automatically...


Callout 2 (middle right): ...however if you do not select a SQL Server from the drop-down, but type one in instead, you must click **Connect** to get the database location from the SQL server.

Callout 3 (bottom right): In most cases, you need to complete these fields only if the SQL server is located on a different machine on your network.


IF YOU ENCOUNTER A CONNECTION FAILURE

If the SQL Server is not local (i.e., it resides on a different server than the Pulse web server), it is common for users who might be less familiar with networking to experience failures when the following is true:


- The SQL Server name and/or instance was entered incorrectly. You must enter the correct server name and instance.

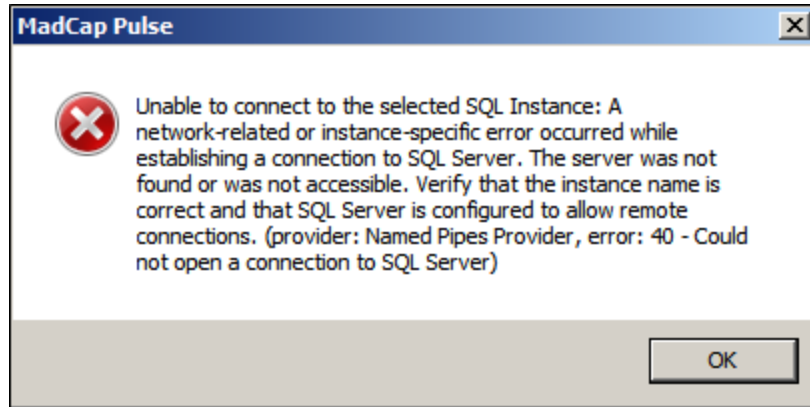

- The account that you are using to perform the installation does not have sysadmin permission on the SQL Server. See your SQL Server Administrator or Network Administrator for the appropriate account to use.

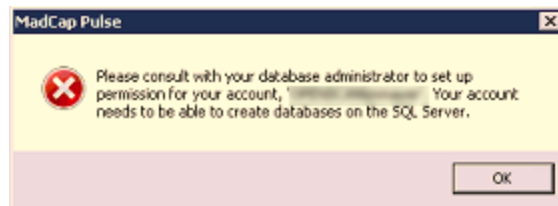

- The SQL Server resides in an untrusted Windows domain. There must be a domain trust relationship between the Pulse web server and SQL server hosting the Pulse database. Make sure you selected the correct server.

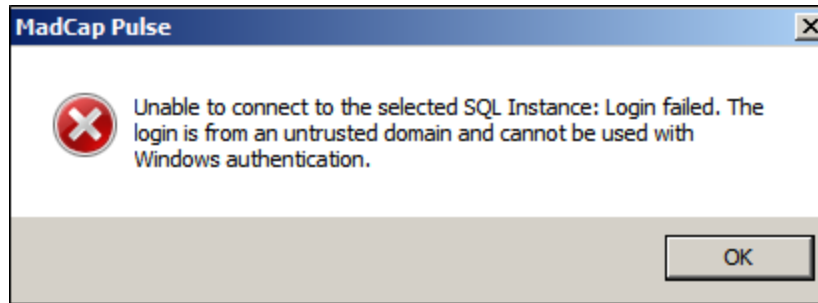

- c. If necessary, complete the authentication fields at the bottom of the page.
 - d. Click **Next**.
6. In the Database Options page, select one of the following options:
 - **Create new** This creates a new database instance with Pulse.OR
 - **Use existing** Select this option only if you have previously installed Pulse. You may click the Browse (...) button to open the Select Database dialog. Select the desired Pulse Database ID from the list. Then click **Connect**. Then click **OK**.
 7. If necessary, in the **Backup path for local SQL database** field, you can click the browse button and choose a location to store a copy of the current database. This field is only enabled if the database has been using a previous version of Pulse. Also, it is not enabled if you are connecting to a database on a remote server.

8. In the **PulseAdmin Password** box, specify the password for the default Pulse Administrator account. Then click **Next**.

MadCap Pulse Configuration Wizard

Configure MadCap Pulse installation

Database Options

Database Creation

Create new databases for MadCap Pulse or connect to a previously installed database. Connecting to a previously installed database will allow you to maintain your user base and information.

☒ Create new

☐ Use Existing

Database

Backup path for local SQL database

Pulse Administration


PulseAdmin Password

Password Strength **Strong**

This is the password that you will use to log in to the Pulse Dashboard for the first time.

< Back Next > Finish Cancel


! IMPORTANT: Record this password in a safe place. This is the default PulseAdmin account. You will need this information to log into the Pulse dashboard for the first time.

 **NOTE:** As you type, the program lets you know when your password meets the minimum password strength thresholds, such as Very Weak, Medium, Strong, Very Strong, and Excellent.

9. In the Configure SMTP page, enter your SMTP server settings:

 **NOTE:** To get your SMTP server settings, see your Email or Network Administrator.

- **SMTP Server** This is the IP address of the SMTP relay that accepts incoming requests which is the host that will send outbound emails for Pulse.
- **SMTP Port** This is the port number of the SMTP server handing outbound emails. This is Port 25 (or the port number for your environment).
- **SMTP User Name** This is the username of a valid account on the SMTP relay.
- **SMTP Password** This is the password for the valid account on the SMTP relay.
- **From Address** This is the from address for emails sent by Pulse. You must have a valid address for this account. For example, type: `PulseRegistration@example.com`.
- **From Display Name** This is the name that displays in email client applications for the email address. For example, type: `Pulse Registration`.
- **Enable SSL** A check mark in this box enables Secure Socket Layers (SSL) encryption. It is recommended that you leave this box blank.

 **NOTE:** If you have content security requirements, purchasing an SSL certificate for your web domain is suggested. This lets you enable SSL transport security, so users can access your site via the https:// protocol. This ensures that the page content that a URL points to is encrypted while the data is being transmitted to your end user (so the content is not visible to others as it passes through the communication chain). See your Network Administrator for more information about SSL.

10. (Optional) Test your SMTP settings.
 - a. In the Configure SMTP dialog, click **Test**.
 - b. In the SMTP Test dialog, enter a valid address in the **Email address** box.
 - c. Click **Send Test Email**.
 - d. Depending on which message you see, do the following:
 - **Test message has been sent** Click **OK**. Then check the email account to ensure you received the test email.
 - **Error sending message** Click **OK**. Ensure that you entered the correct SMTP settings for your environment. Then try testing the settings again.
11. Click **Next**. The Verify Configuration page appears.
12. In the Verify Configuration page, review the components list. When you are ready to proceed, click **Next**. A progress indicator shows you the status of the installation.
13. When the Configuration Complete page appears, you can click **View Log** or **Save Log** if you want to see or save the results.
14. Click **Finish**.


Starting the Pulse Server Application

When you start the Pulse server application, the system opens the Pulse Server Configuration window.

HOW TO START THE PULSE SERVER APPLICATION

1. Log in to the Pulse web server as an administrator.
2. Start the Pulse application by selecting one of these options:
 - **Desktop Shortcut** On the Windows desktop, click the MadCap Pulse shortcut. This is automatically added to the desktop at the end of the installation process.
 - **Start Menu** In Windows, click **Start > All Programs > MadCap Software > MadCap Pulse**.
 - **Program Files** Double-click the program icon in the Program Files directory. If you installed the program using the default installation folder, it is located at one of these paths:
 - **On 64-bit Platforms** C:\Program Files\MadCap Software\MadCap Pulse\Pulse.app\Pulse.app
 - **On 32-bit Platforms** C:\Program Files (x86)\MadCap Software\MadCap Pulse\Pulse.app\Pulse.app

Here is the Pulse Server Configuration window:

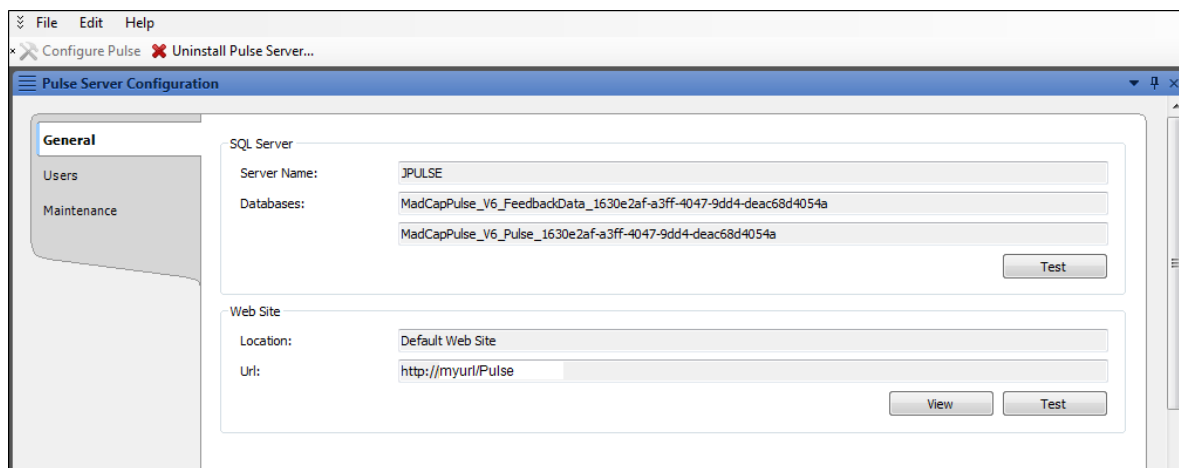

Setting the PulseAdmin Password

During the Pulse installation, you created a password for the default PulseAdmin account. You can reset that password at any time.

HOW TO SET THE PULSEADMIN PASSWORD


1. Log in to the Pulse web server as an administrator:
 - **Username** The username is always "PulseAdmin" by default.
 - **Password** This is the password that you defined during when you installed the Pulse server application.
2. Start the Pulse server application.
3. Select **File > Set Admin Password**.
4. In the **Set PulseAdmin Password** box, type a new password. Then click **OK**.
5. In the configuration dialog, click **OK** to acknowledge that your password was updated.

Pulse Server Configuration Window

The Pulse Server Configuration window contains options that let you perform a variety of maintenance and management tasks.

GENERAL TAB

The controls in the **General** tab give you the ability to view and test the general connection settings for the Pulse server application.

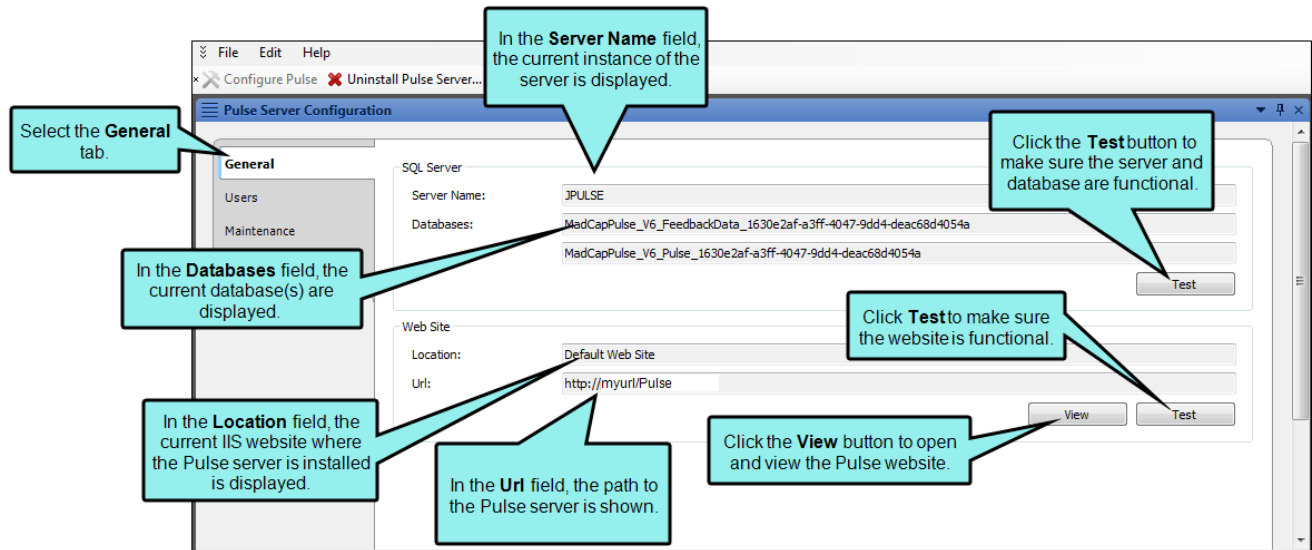

User Interface	Description
SQL Server	Contains information about your Pulse database.
Server Name	A read-only field that shows the computer name of the SQL Server and the instance for the Pulse database.
Databases	A read-only field that shows the Database IDs for the Pulse databases.
Test	<p>Click this button to test the database connection settings.</p> <p>HOW TO TEST THE SQL SERVER SETTINGS</p> <ol style="list-style-type: none"> 1. Launch the Pulse server application. 2. In the Pulse Server Configuration window, select the General tab. 3. In the SQL Server area, review the Server Name and Databases that were configured during installation. 4. Click Test. 5. If the test is successful, the system shows a message indicating this. 6. Click OK to close the message.
Web Site	Contains information about the site running on your Pulse web server.
Location	Typically this reads Default Web Site.
URL	The URL for the Pulse dashboard.

User Inter- face	Description
View	<p>Click this button to open the Pulse dashboard in a web browser.</p> <p>HOW TO VIEW THE WEB SITE SETTINGS</p> <ol style="list-style-type: none"> 1. Start the Pulse server application. 2. In the Pulse Server Configuration window, select the General tab. 3. Click View. 4. Depending on your configuration, one of the following occurs: <ul style="list-style-type: none"> ■ If You are Able to View the Web Site If your web site settings is properly configured, the Pulse dashboard appears in a separate browser window. OR ■ If You are Not Able to View the Web Site If your web site settings are not properly configured, a "Pulse was not able to process your request message" may appear. See "Frequently Asked Questions" on page 123.
Test	<p>Click this button to test the web site settings.</p> <p>HOW TO TEST THE WEB SITE SETTINGS</p> <ol style="list-style-type: none"> 1. Start the Pulse server application. 2. In the Pulse Server Configuration window, select the General tab. 3. Click Test. 4. Depending on your configuration, one of the following occurs: <ul style="list-style-type: none"> ■ Web site test succeeded If your web site settings is properly configured, the Web site test succeeded dialog appears. OR ■ Web site test failed If your test is not successful, an error message is shown. See "Frequently Asked Questions" on page 123.

USERS TAB

The controls in the **Users** tab provides you with user counts and name information.

The screenshot shows a window titled "Pulse Configuration" with a sidebar on the left containing "General", "Users", and "Maintenance". The "Users" tab is selected. In the main area, there is a "Groups" dropdown menu set to "All", a "Count: 1" label, and a table titled "Users".

Callouts provide the following information:

- "Select the **Users** tab." points to the "Users" tab in the sidebar.
- "You can select a group from this field." points to the "Groups" dropdown menu.
- "The number of users that exist the group selected above is shown in the Count section." points to the "Count: 1" label.
- "In this field, the names and email addresses of all the users in the group you have selected are displayed." points to the "Users" table.


First Name	Last Name	Email Address
Pulse Administrator		

User Inter- face	Description
Groups	<p>Select one of the listed groups from the drop-down list.</p> <p>HOW TO VIEW USER COUNTS AND INFORMATION</p> <ol style="list-style-type: none"> 1. Start the Pulse server application. 2. In the Pulse Server Configuration window, select the Users tab. 3. From the Groups list, select one of these options: <ul style="list-style-type: none"> ■ All View counts and users for all administrative and registered users. ■ Administrators View user counts and member information for the Administrators group. ■ Customers View user counts and member information for members of the Customers group ■ Employees View user counts and member information for members of the Employees group
Count	A read-only field. Shows the total number of users for the selected group.
First Name	A read-only field. The last name of the user.
Last Name	A read-only field. The first name of the user.
Email Address	A read-only field. A valid email address for the user.

MAINTENANCE TAB

The controls in the **Maintenance** tab lets you manage the PulseServer application's services. The options that are available in this dialog depend on the version of Microsoft SQL Server being used:

- **If You are Using Microsoft SQL Server Express Edition with Advanced Services** You have the ability to view and start the Pulse Server and RabbitMQ service (these are both services that run in Windows). You also have the ability to schedule database backups.

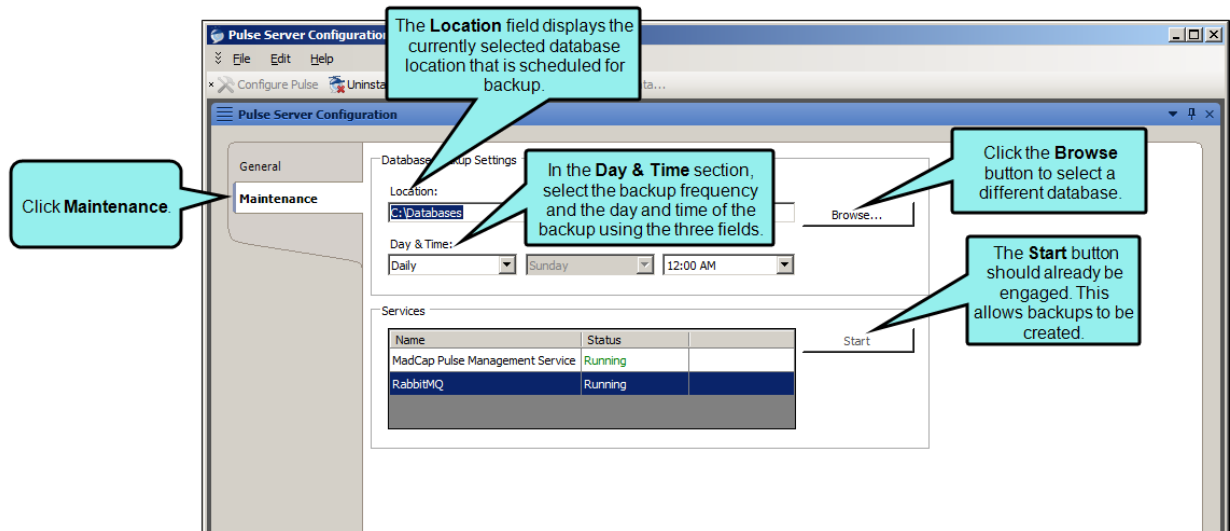


HOW TO SCHEDULE A BACKUP

This feature is available only when the Pulse database is using Microsoft SQL Server Express Edition with Advanced Services.


Use the Maintenance tab to schedule backups of your Pulse database, whether it resides on the local server or a different server on the network.

You can schedule a backup of your Pulse database on the SQL server on a daily or weekly schedule. This saves your database information in a backup file (e.g., a file with the BAK file name extension).

In the event that a database recovery is needed, your SQL Administrator can use SQL Server Management Studio to restore your Pulse database using the latest backup file.

 **IMPORTANT:** For a backup to take place at the scheduled time, the Pulse web server must be powered on and the MadCap Pulse Management Service and RabbitMQ service must be running.

1. Start the Pulse server application.
2. In the Pulse Server Configuration window, select the **Maintenance** tab.
3. In the **Location** field, click **Browse**. Then, navigate to the directory where you want to save the backup files. Important things to keep in mind:
 - **Local Backup** If you want to store the backup file (BAK) on the local system, the default backup folder is : C:\Databases. *This is the recommended method.*
 - **Network Drive** If you want to store the backup file (BAK) on a network drive, select the desired location.

 **NOTE:** If you choose this method, the Pulse web server must have permission to write to the drive. In addition, the system drive must be powered on and connected to the network at the scheduled backup time.

4. In the **Day & Time** fields, specify the desired backup schedule:
 - **Daily or Weekly** Select either **Daily** or **Weekly**.
 - **Day of Week** If you select a Weekly backup schedule, you can also select the desired day to perform the backup.
 - **Time** Select the time of day to perform the backup.


5. As long as the listed Services are running, you will not need to click **Start**. In the event that services stop running, simply click **Start** to restart the services and backup schedule.

❗ **WARNING:** You do not have the ability to disable the MadCap Pulse Management Service or Rabbit MQ service. To function properly, the Pulse server application requires these Services to run in the background.

6. Save your changes by selecting **File > Save**.

📄 **NOTE:** If you do not save your changes, you will be prompted to save them when you exit the application.

- **If You are Using a Different Edition of Microsoft SQL Server** You have the ability to view the status of and start the Pulse Service and RabbitMQ service. However, backups are not supported by Pulse. This is because the full versions of SQL provide administrators with several options for creating full database backups.

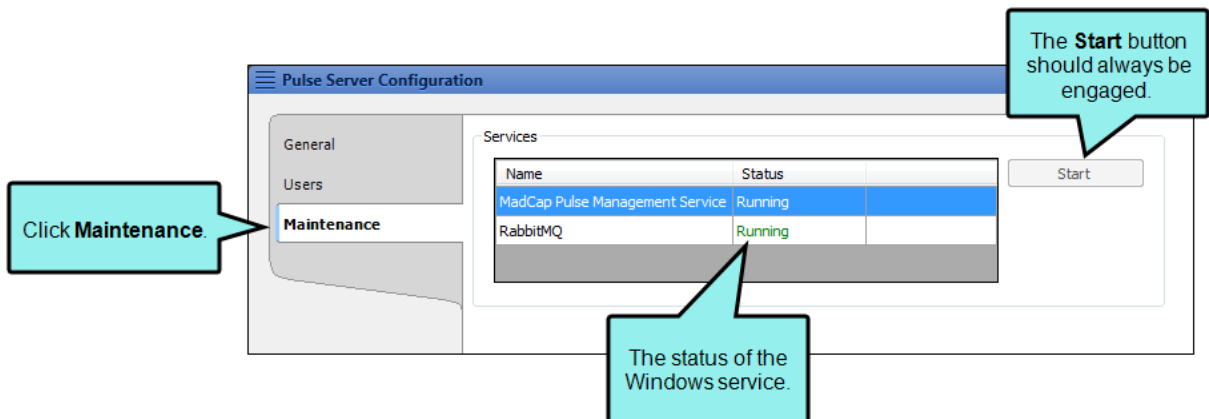

HOW TO BACKUP AND RESTORE DATABASES IN SQL SERVER

To learn how to backup and restore a database in SQL server, see the Microsoft SQL Server web site at:

- For SQL Server 2012 [http://technet.microsoft.com/en-us/library/ms187048\(v=sql.110\).aspx](http://technet.microsoft.com/en-us/library/ms187048(v=sql.110).aspx)
- For SQL Server 2008 R2 [http://technet.microsoft.com/en-us/library/ms187048\(v=sql.105\).aspx](http://technet.microsoft.com/en-us/library/ms187048(v=sql.105).aspx)
- For SQL Server 2008 [http://technet.microsoft.com/en-us/library/ms187048\(v=sql.100\).aspx](http://technet.microsoft.com/en-us/library/ms187048(v=sql.100).aspx)


Importing Feedback Data

If your company previously used the MadCap Feedback product, you can import information from your existing Feedback database into the Pulse database.

WHAT GETS IMPORTED

The following describes what Feedback data is imported to the Pulse database:

- **Report Data** All of the report data.
- **Comments** All of the comments.
- **User Information** All of the user account information, except passwords.

 **IMPORTANT:** Feedback users do not have passwords. Their email address will serve as both their user name and password (e.g., if you have a user with bob@example.com, his password will now be bob@example.com). Users can change this password by clicking the **Forgot your password?** link in any Pulse Account Login page.

HOW TO IMPORT FEEDBACK DATA

1. Launch the Pulse server application.
2. Click **Import Feedback Data**.
3. In the Select SQL Server and Database dialog, complete the following:
 - **SQL Server** The computer name of the SQL server.
 - **Authentication** The authentication method.
 - **User name** The account username.
 - **Password** The account password.
 - **Database** The SQL Server instance.
4. Click **OK**.

Updating Pulse

You may periodically wish to check to see if there are updates for the Pulse server application to download.

HOW TO UPDATE PULSE

1. Launch the Pulse server application.
2. In the toolbar, select **Help > Check for Updates**.
3. In the dialog that opens:
 - **No Updates Available** If not updates are available, simply click **Close**.
 - **Updates Available** If updates are available, highlight the update in the Download list. Then click **Download Updates**.

Uninstalling Pulse


You can uninstall the Pulse server and the application.

HOW TO UNINSTALL THE PULSE SERVER

When you use this method to remove Pulse, only the configuration information for the Pulse server is removed. The existing Pulse database remains untouched by this process. It also leaves the Pulse server application on the system, so you can reconfigure it at a later time.

When prompted to decide if you want to proceed, click **Yes**. The system removes all of the Pulse server's configuration information.

1. Log in to the Pulse web server as an administrator.
2. Launch the Pulse server application.
3. In the toolbar, click the **Uninstall Pulse Server** button.

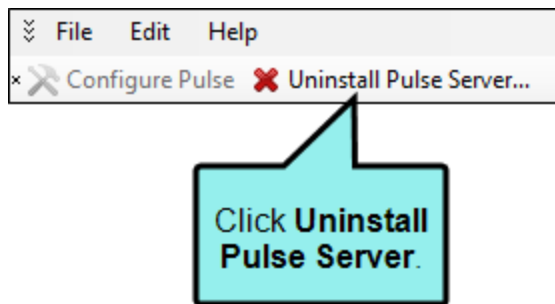


4. When prompted to decide if you want to proceed, click **Yes**. The system removes all of the Pulse server's configuration information.

The next time you launch Pulse, you will need to activate and configure the server for first-time use.

HOW TO UNINSTALL THE PULSE SERVER APPLICATION

If you want to completely remove the Pulse application from the server, use the Windows Control panel.

1. Log in to the Pulse web server as an administrator.
2. Open the Windows Control Panel.
3. Under **Programs**, click **Uninstall a Program**.
4. In the Uninstall or Change a Program page, right-click **MadCap Pulse** and select **Uninstall** from the context menu.

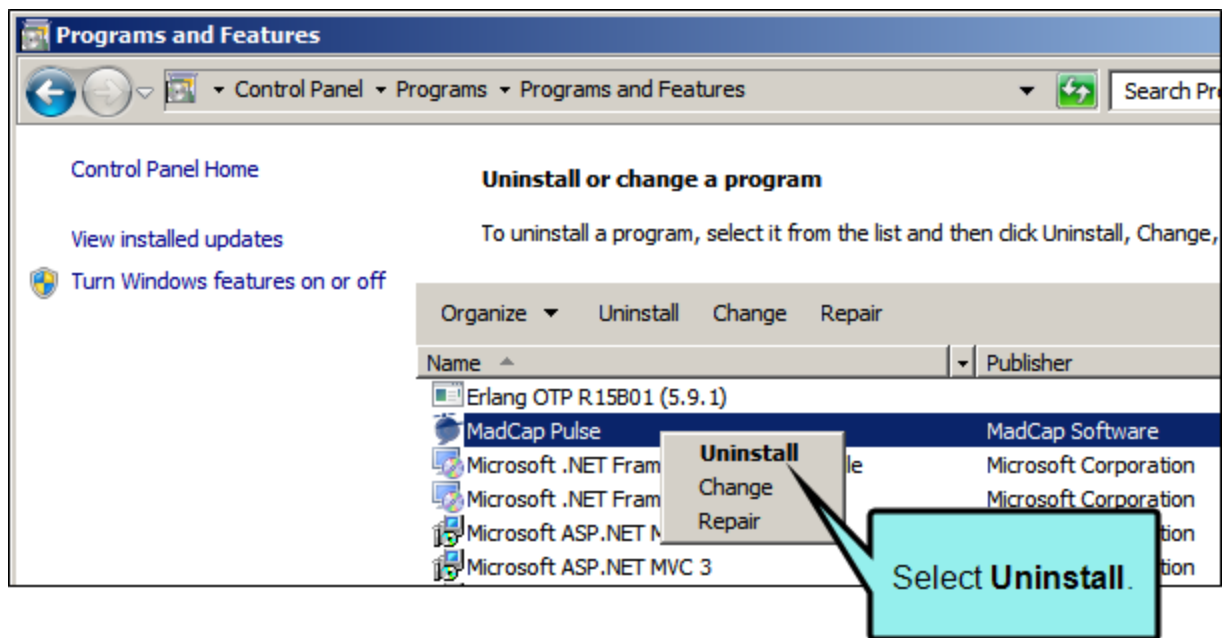

5. In the Programs and Features dialog, click **Yes**.
6. In the MadCap Pulse dialog, a list of applications related to Pulse appears. Review the list and select **Automatically close applications and attempt to restart them after setup is complete**. Then click **OK**. Windows begins removing the Pulse server application.

Integrating Flare and Pulse

To integrate the embedded discussion forms and other Pulse features with your Flare output, add a new community in Flare. This action automatically creates a new system in Pulse, allowing your web server to host, store, and serve the embedded discussion forms that appear below the topics in your Flare output. This system also gives you and your team members the ability to moderate and administer the Pulse features and content from the Pulse dashboard.

This chapter discusses the following:

- Integration Options90
- Enabling the Pulse Server91
- Setting Up the Community in Flare94
- Mapping/Remapping a Flare Community to Pulse103
- Enabling the Community Tab in the Output115
- Setting the Community Options—Comments and Search Results ..118
- Building and Publishing the Flare Output122

Integration Options

If you are developing an online Flare target for a single product, service, or purpose, integrating Flare is a straightforward process. You simply install Pulse and then add a new Flare community to create a corresponding system in Pulse. However, because many organizations develop multiple Flare targets, you also have these options:


- **Add a Single Flare Community for Use With Multiple Targets** In this scenario, you add one Flare community which creates a corresponding Pulse system. Then you associate that community with multiple Flare targets. This method gives you less-granular reporting capabilities in Pulse.
- **Add a Unique Flare Community for Each Different Target** In this scenario, you add a unique Flare community for each different target. This creates a separate system in Pulse. The advantage of using this option is that it gives you more granular reporting capabilities, letting you generate usage reports for each community.

Enabling the Pulse Server


To give Flare the ability to interact with Pulse, you must supply the Flare community in the target with the appropriate connection information and administrative access credentials for the Pulse web server.


HOW TO ENABLE THE PULSE SERVER


1. Open the desired Flare project.
2. In the Project Organizer, open the desired WebHelp or HTML5 target.
3. In the Target Editor, select the **Community** tab.

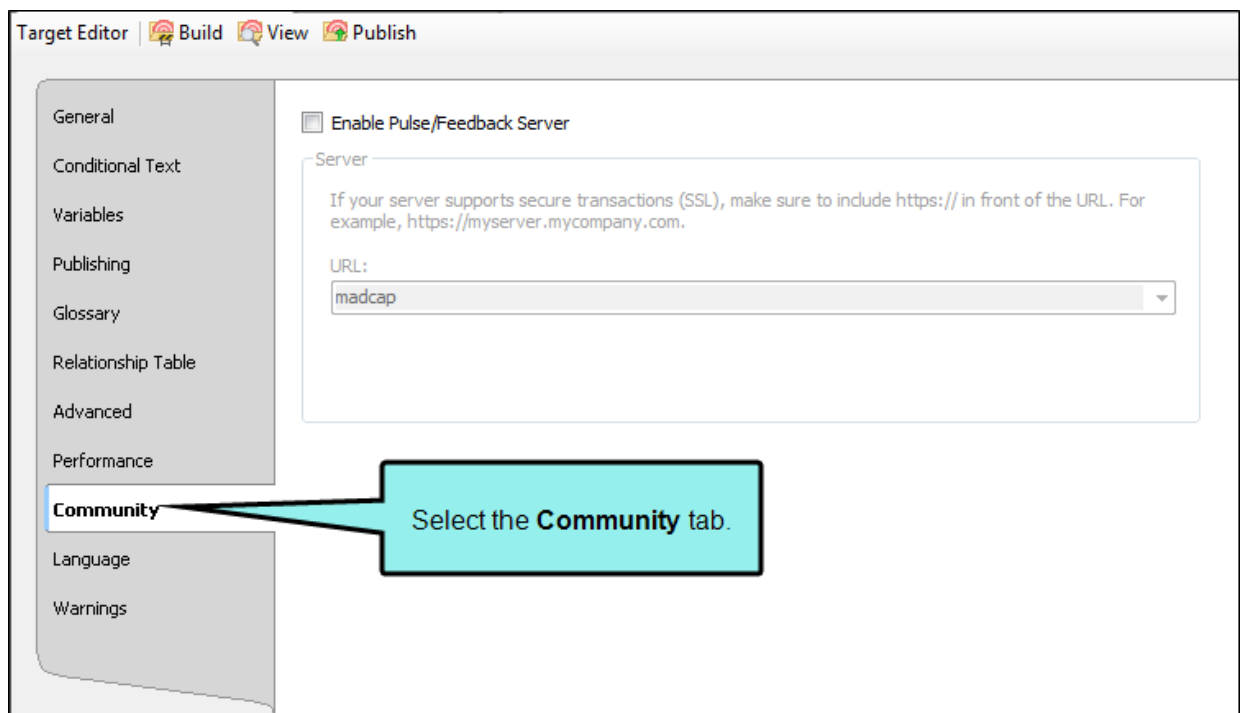

4. Enable the server as follows:
 - a. At the top of the **Community** tab, place a check mark in the **Enable Pulse/Feedback Server** box.
 - b. In the **URL** field, type the URL for the Pulse web server.

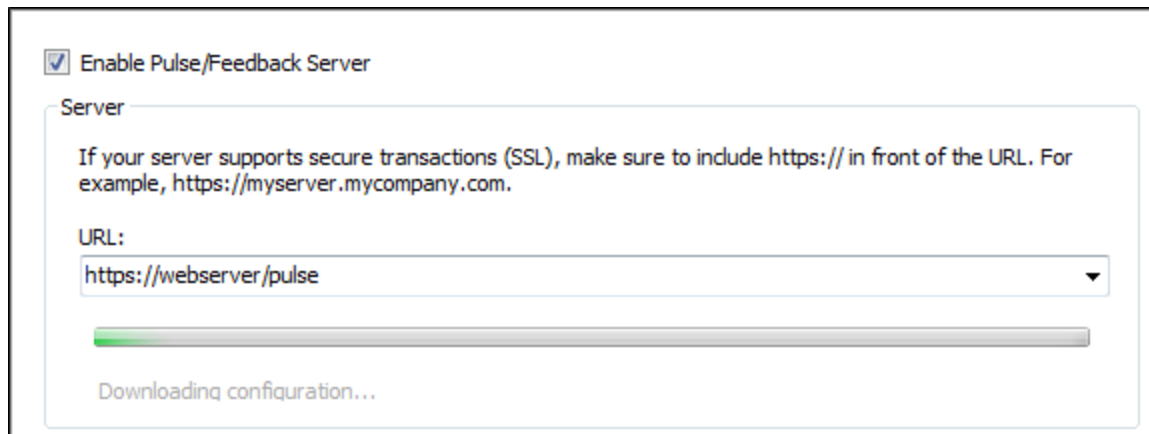

 **NOTE:** To find the URL, log in to the Pulse dashboard as an administrator. Then select **Administration > Settings > General Settings**. The URL above corresponds to the value in the **Site URL** box.

 **NOTE:** If you have installed a Secure Sockets Layer (SSL) certificate on the Pulse web server, ensure that the URL starts with the **https://** protocol (instead of **http://**).

- c. Enter the access credentials as appropriate:
- If this is the first time you are enabling the Pulse community in the Flare target, the Log In dialog automatically appears.
 - OR
 - If you want to change the existing login information, click the **Logout** button to clear the existing credentials. Then click **Login**. The Log In dialog appears.
- d. In the Log In dialog, type the appropriate **User name** and **Password**. The account that you use must have administrative permissions to Pulse. You have these options:
- **Use the PulseAdmin Account** This is the default administrator account that was created by the person who installed Pulse.

- **Use an Account that is a Member of the Administrators Group** This can be any account belonging to a registered Pulse user who is a member of the Administrators group.
- e. Click **OK** or press **Enter** to close the Log In dialog.
 - f. Before you can save the Flare target, you must associate a Flare community with the Pulse system.

Setting Up the Community in Flare

After enabling the Pulse server in the desired target, you can set up the community in Flare. If you are setting up Flare for the first time, you will add a new Flare community.

HOW TO ADD A NEW FLARE COMMUNITY

If this is the first time you are integrating Flare and Pulse, add a new Flare community to your project's Flare target. This process automatically creates a new "system" on the Pulse server. In Pulse, a system hosts the following items:

- The activity streams that are used when moderating your topics with the Pulse dashboard
- The embedded discussion forms that registered Pulse users can access in the Flare output

❗ IMPORTANT: To integrate Flare content with Pulse integration, you must always add new or use existing communities in Flare. While you have the ability to create systems using the Pulse dashboard, you do not have the ability integrate those systems with a Flare community.

1. In the **Community** tab, locate the **Communities** list and then click **Manage**.

☒ Enable Pulse/Feedback Server

Server

If your server supports secure transactions (SSL), make sure to include https:// in front of the URL. For example, https://myserver.mycompany.com.

URL:

Community Login


Current User

Community

Communities:

Click **Manage**.

2. In the Manage Community dialog, click **Add**.
3. In the Enter Name dialog, type a name for your community. In this example, we are creating a community to use with a Flare target about Pets. Then click **OK**.

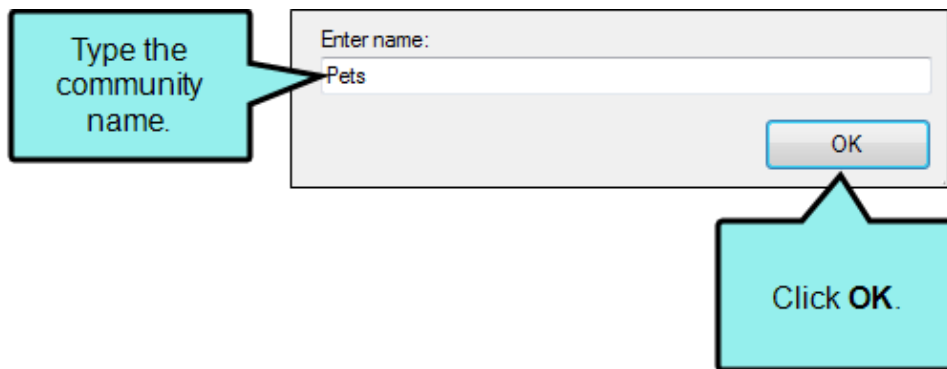

4. In the Manage Communities dialog, the new community appears. Click **OK** to close the dialog.
5. Click **Refresh** to update the Current Pulse Configuration info. This provides you with basic information about the community, such as the status of the server, and the total number of users.


After the community is associated with the Flare target, the **Remap Topics** button becomes available so you can map your community topics to Pulse for the first time.

You also have the ability to select an existing community, delete a community, provide a published URL, and rename a community as follows:


HOW TO SELECT AN EXISTING FLARE COMMUNITY


If you need to publish any updates for your Flare output and do not wish to create a new community for your documentation release, select the community that you previously created for the target. This gives you the ability to ensure that any new, removed, and updated topics are mapped to the appropriate embedded discussion forms in the Pulse system.


1. In the **Community** tab, locate the **Community** area.
2. From the **Communities** list, select an existing community.

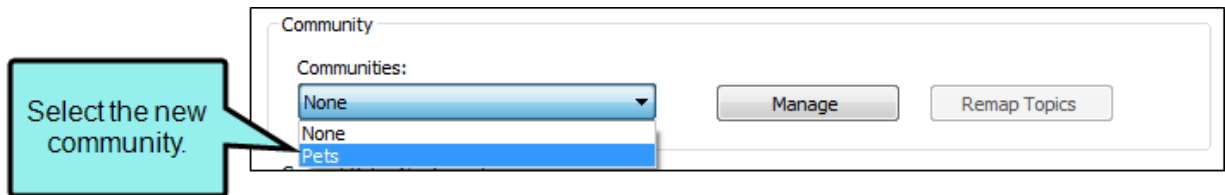

3. Click **Refresh** to update the Current Pulse Configuration info. This provides you with basic information about the community, such as the status of the server, and the total number of users.

 **NOTE:** The Communities list in Flare initially only includes communities that have been added with the Flare user interface. If you create Pulse systems using the Pulse dashboard, those systems will not be listed as Flare communities until you remap the topics.

 **NOTE:** You can associate multiple Flare targets with a single community if desired. However, for best results with reporting, we recommend that you create a separate community for each target. This will also simplify any mapping/remapping tasks when you publish updates.


 **NOTE:** If you want to verify that the Flare community you added is now a system in Pulse, log in to the Pulse dashboard using an account that is a member of the Administrators or Employees group. Then select **Systems > Find Systems** from the menu. The community you created will appear in the list.

After the community is activated, the **Remap Topics** button becomes available so you can remap the community topics to Pulse.


HOW TO DELETE A FLARE COMMUNITY

If you want to delete a Flare community, use the steps below. This deletes both the Flare community and the Pulse system.

1. In the **Community** tab, locate the **Communities** list and click the **Manage**.

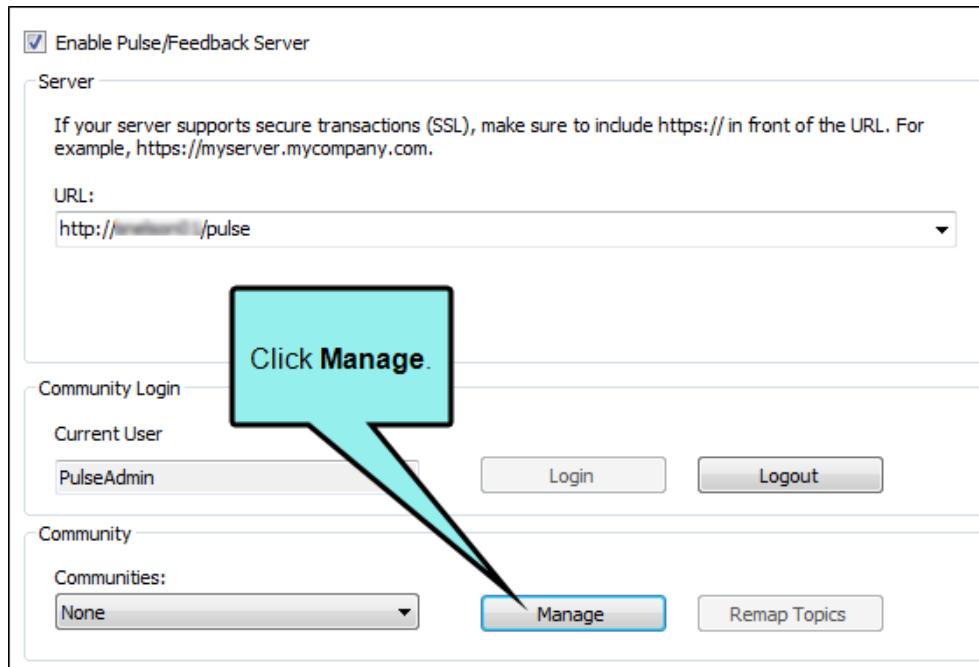


The screenshot shows a web interface for configuring the Pulse/Feedback Server. At the top, there is a checkbox labeled "Enable Pulse/Feedback Server" which is checked. Below this is a "Server" section with a text box containing a URL: "http://[redacted]/pulse". A callout box with the text "Click Manage." points to the "Manage" button in the "Community" section. The "Community" section also includes a "Communities:" dropdown menu set to "None" and a "Remap Topics" button. The "Community Login" section shows the "Current User" as "PulseAdmin" with "Login" and "Logout" buttons.

2. In the Manage Community dialog, select the community that you want to remove. Then click **Delete**.
3. When prompted to confirm the delete action, click **Yes**. This removes your selection from the Communities list.
4. Click **OK** to close the Manage Communities dialog.
5. Click **Remap Topics** and confirm the topics to remove.
6. Click  to save your work.

HOW TO PROVIDE A PUBLISHED URL FOR A COMMUNITY

You can assign a URL path to your community from your Flare target (if you have Flare 10.2 or later installed). This can also be done from the Pulse dashboard (by selecting **Administration > Settings** and clicking **Communities**), but using the Flare target is recommended.


1. Under the **Community** area, click the **Manage** button.
2. In the Manage Communities dialog, highlight the community that you want to edit. Then click **Edit**
3. In the Edit Community dialog, click in the **Enter published url** field and enter a path to the main landing page of your Flare output.

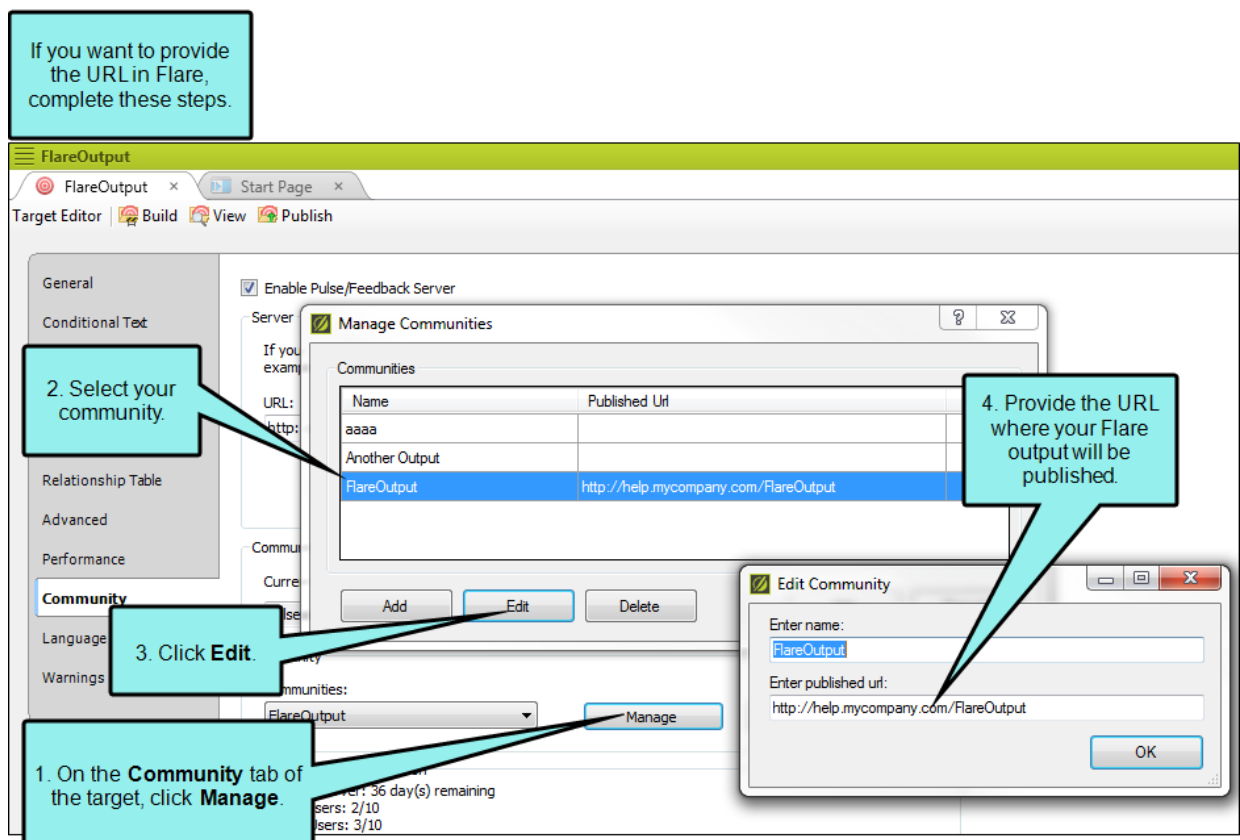

When you enter a published URL path, make sure you include `http://` at the beginning of the URL.

☆ EXAMPLE


Let's say you've generated a target called "FlareOutput" and you've uploaded the output so that users access it here: help.mycompany.com/FlareOutput/Default.htm. In that case, enter <http://help.mycompany.com/FlareOutput> in the Published Url field.

4. Click **OK** to close the Edit Community dialog. Click **OK** to close the Edit Community dialog.
5. Click **OK** to close the Manage Communities dialog.
6. Click  to save your work.


Why is it a good idea to assign a URL path to a community? Because it allows topic feeds to open in context.

☆ EXAMPLE

Let's say you have not provided a published URL for your community. You receive an email notification stating that a user has posted a comment in one of your topics. So you click the topic name link in the email notification to see the feed where the comment was posted. The feed opens in the dashboard view of Pulse, which shows only the feed and not the topic associated with it.

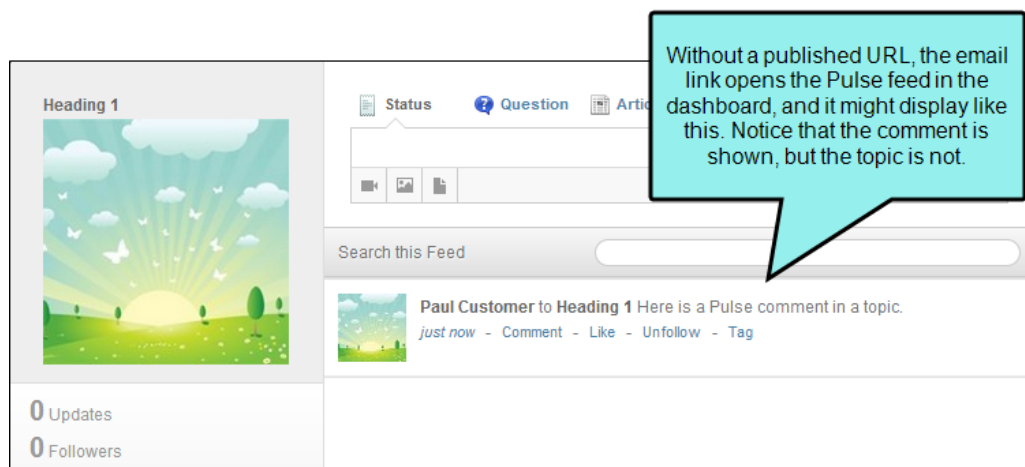


- ☆ On the other hand, let's say you provide a published URL to your community. In that case, when you click the topic link, the topic opens in the actual Flare output. You see both the topic and the Pulse feed below it, therefore giving context to the post.

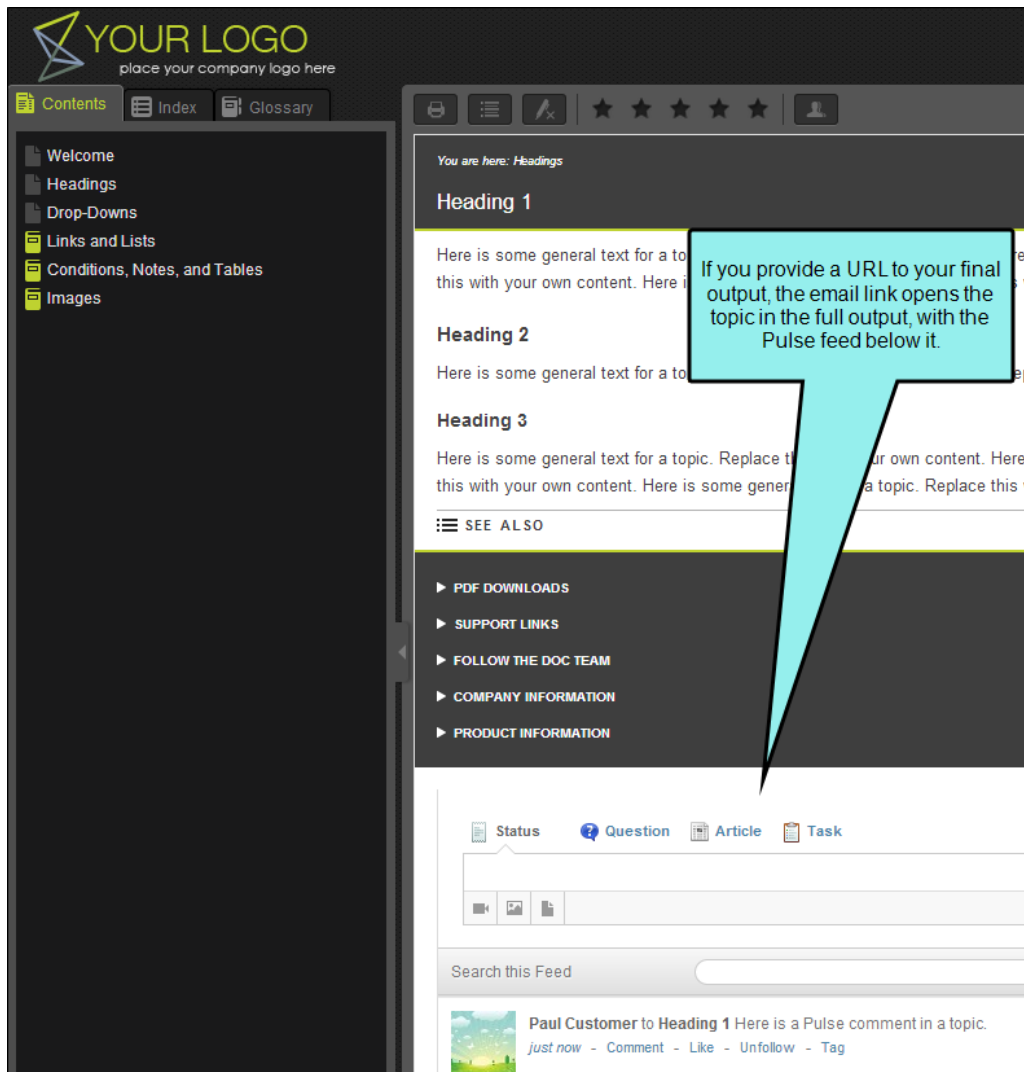

HOW TO RENAME A FLARE COMMUNITY


1. In the **Community** tab, under **Current Pulse Configuration**, click the **Refresh** button.
2. Under the **Community** area, click the **Remap Topics** button ensure your topics have been mapped
3. Under the **Community** area, click the **Manage** button.
4. In the Manage Community dialog, highlight the community that you want to rename. Then click **Rename**.

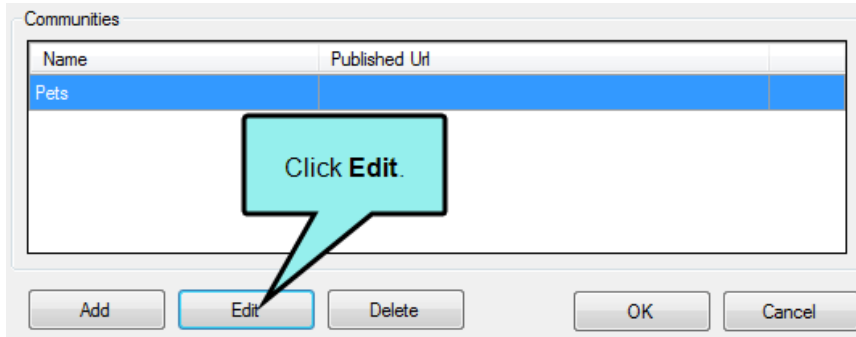


In order to add the embedded discussion forms to the Flare output that you will publish, you must map/remap the community topics in Flare for Pulse.

5. In the Enter Name dialog, type a new name for your community. Then click **OK**.

This changes the name of the community in Flare, as well as the name of its corresponding Pulse system.

 **NOTE:** If an error message appears, try clicking the **Refresh** button and the remapping the topics. This typically resolves any issues.

6. Click **OK** to close the Manage Communities dialog.
7. Click  to save your work.


Mapping/Remapping a Flare Community to Pulse

In order to add the embedded discussion forms to the Flare output that you will publish, you must map/remap the community topics in Flare for Pulse.

HOW TO MAP A NEW FLARE COMMUNITY TO A PULSE SYSTEM

If this is the first time you are setting up a Flare community for a target, you will need to map the topics for your community to Pulse.

1. Make the desired changes to your Flare target. Always be sure to update the TOC before remapping the topics.
2. In the Target Editor, select the **Community** tab.
3. From the **Communities** drop-down list, select the appropriate community.
4. Click **Remap Topics**.

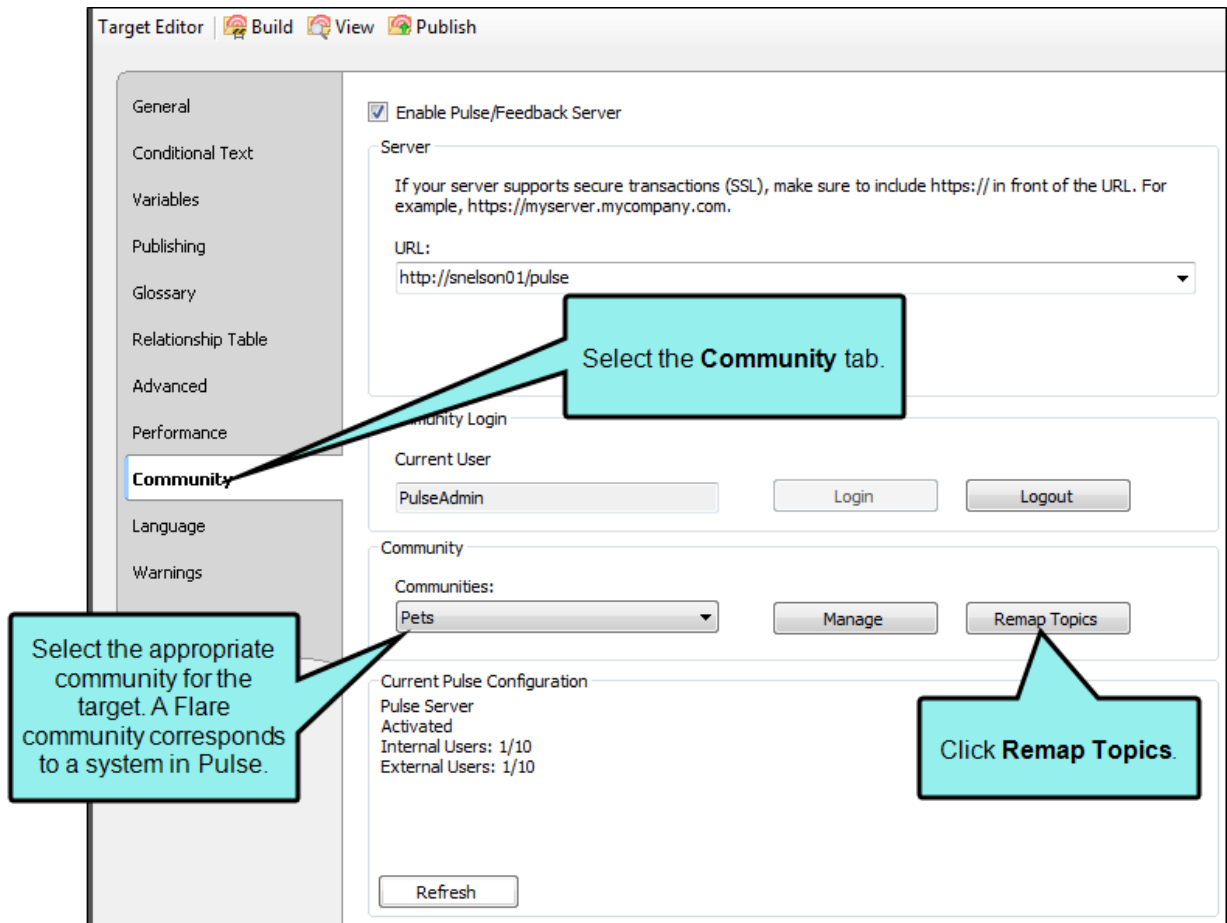



This opens the Remap Community Topics dialog.

5. In the Remap Community Topics dialog, make sure the **New Topics** tab is selected and review the topics in the list.

☆ EXAMPLE

A topic count appears in the label of the **New Topics** tab. The tab lists the topic titles and paths to the topics. These items will be mapped to a corresponding stream in Pulse. In a new community, the counts in the other tabs will typically be zero (0).

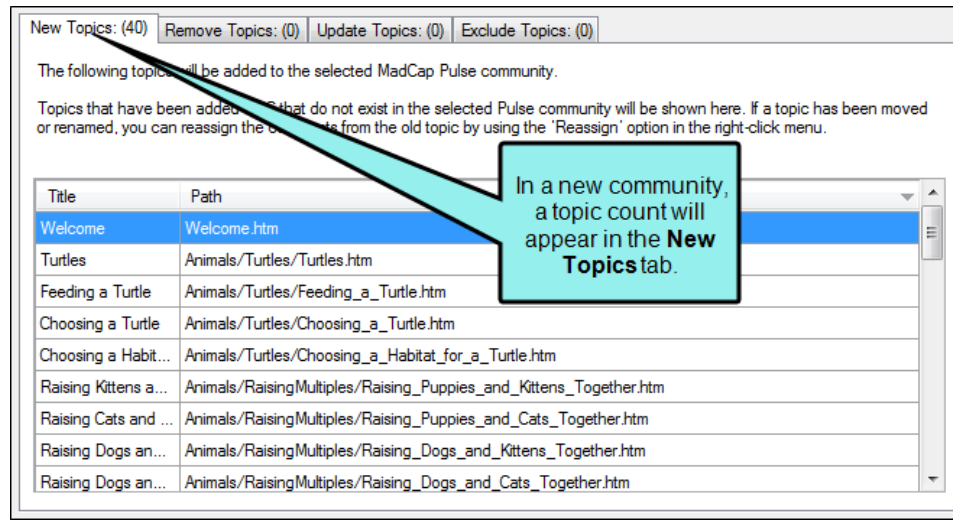

6. When finished, click **OK**. The system automatically maps each community to a stream in Pulse. The community updated message appears.
7. Click  to save your work.

HOW TO REMAP A FLARE COMMUNITY TO AN EXISTING PULSE SYSTEM


As you prepare to publish content updates to a Flare target, you can review the new, removed, and updated topics and then reassign any of the topics to the appropriate stream in the Pulse system. This stream corresponds to the embedded discussion form at the bottom of the Flare topic.

1. Make your content changes in Flare. Be sure to make all of the desired updates in the Flare TOC associated with your target.
2. Open the Flare target.
3. In the Target Editor, select the **Community** tab.
4. From the **Communities** drop-down list, select the appropriate community.
5. Click **Remap Topics**. This opens the Remap Community Topics dialog so you can review the updates:

NEW TOPICS TAB

The New Topics tab lists Flare updates that have an effect on the Pulse mapping definitions:

- **New Topics** New topics that have been added to the Flare TOC associated with the target.
- **Moved Topics** Existing topics that have been moved to a different folder or location in the Content Explorer.
- **Renamed Topics (New Name)** Existing topics where the actual file name has changed. The new file name appears in this tab.

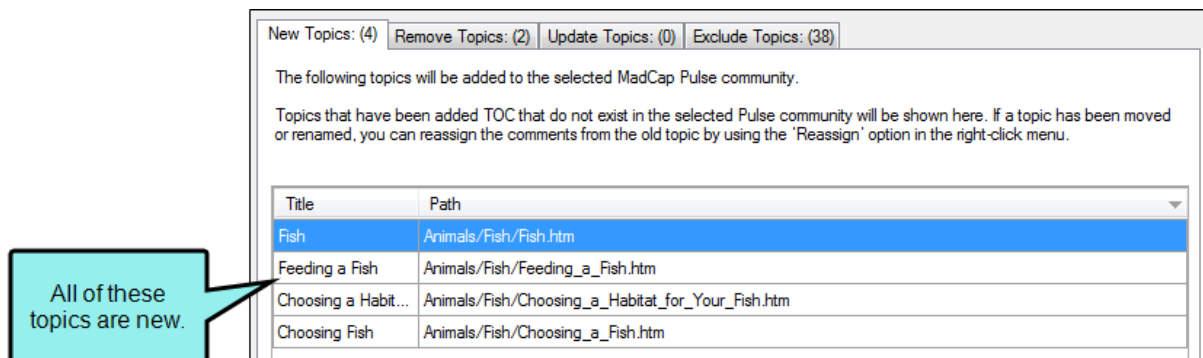

New Topics: (4) Remove Topics: (2) Update Topics: (0) Exclude Topics: (38)

The following topics will be added to the selected MadCap Pulse community.

Topics that have been added TOC that do not exist in the selected Pulse community will be shown here. If a topic has been moved or renamed, you can reassign the comments from the old topic by using the 'Reassign' option in the right-click menu.


Title	Path
Fish	Animals/Fish/Fish.htm
Feeding a Fish	Animals/Fish/Feeding_a_Fish.htm
Choosing a Habit...	Animals/Fish/Choosing_a_Habitat_for_Your_Fish.htm
Choosing Fish	Animals/Fish/Choosing_a_Fish.htm

All of these topics are new.

REMOVE TOPICS TAB

The Remove Topics tab lists Flare updates that have an effect on the Pulse mapping definitions:

- **Deleted Topics** Topics that have been removed from the Flare TOC associated with the target.
- **Moved Topics** Existing topics that have been moved to a different folder or location in the Content Explorer.
- **Renamed Topics (Former Name)** Existing topics where the file name has changed. The former file name appears in this tab.

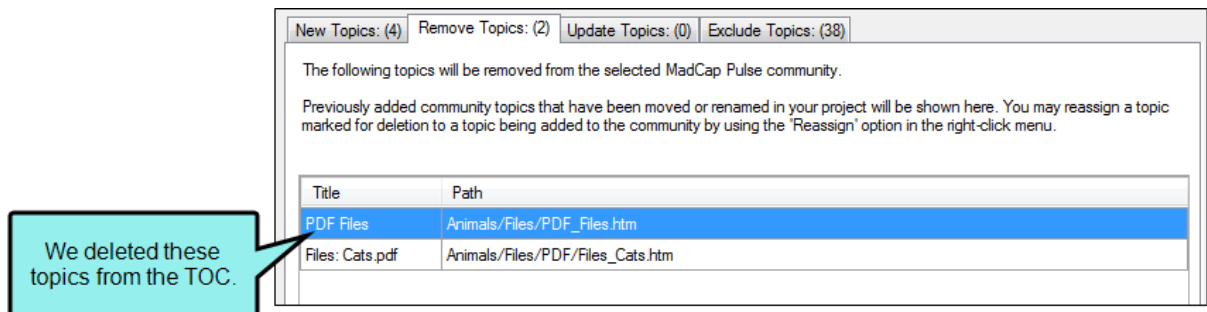

New Topics: (4) Remove Topics: (2) Update Topics: (0) Exclude Topics: (38)

The following topics will be removed from the selected MadCap Pulse community.


Previously added community topics that have been moved or renamed in your project will be shown here. You may reassign a topic marked for deletion to a topic being added to the community by using the 'Reassign' option in the right-click menu.

Title	Path
PDF Files	Animals/Files/PDF_Files.htm
Files: Cats.pdf	Animals/Files/PDF/Files_Cats.htm

We deleted these topics from the TOC.

UPDATE TOPICS TAB

The Update Topics tab only lists community topic updates that specifically relate to Pulse mapping definitions. This includes topic updates such as title changes, reassigned links, and so on.

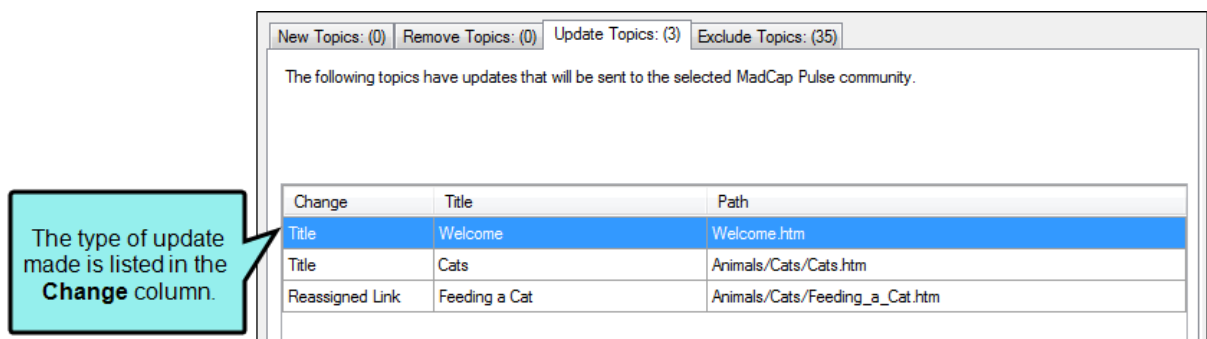

New Topics: (0) Remove Topics: (0) Update Topics: (3) Exclude Topics: (35)


The following topics have updates that will be sent to the selected MadCap Pulse community.

Change	Title	Path
Title	Welcome	Welcome.htm
Title	Cats	Animals/Cats/Cats.htm
Reassigned Link	Feeding a Cat	Animals/Cats/Feeding_a_Cat.htm

The type of update made is listed in the **Change** column.

EXCLUDE TOPICS TAB

The Exclude Topics tab lists all topic files where Flare changes have no effect on the Pulse mapping definitions.

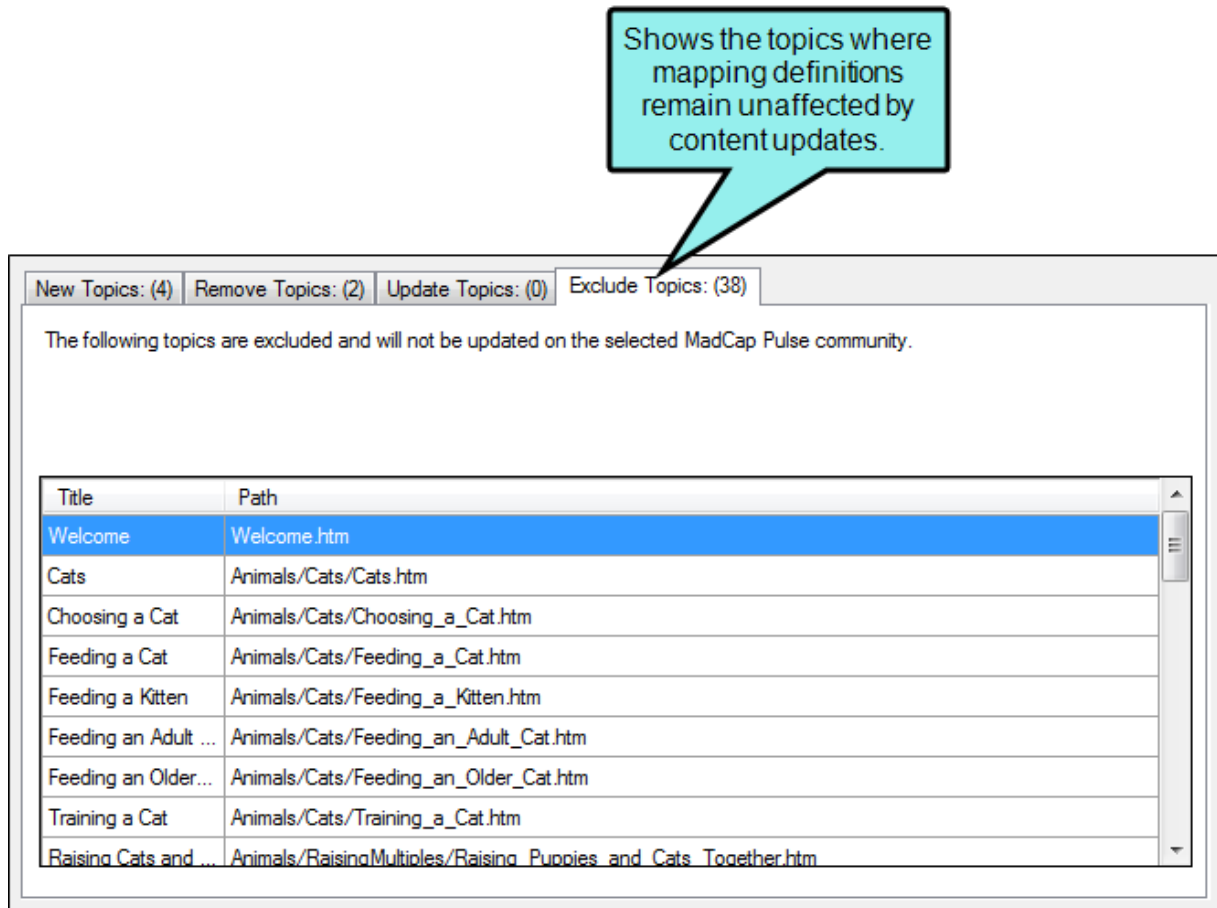

When finished, click **OK**. The community updated message appears.

6. Review the topics in each tab and then reassign the links as desired. See below for instructions.
7. When finished, click **OK**. The community updated message appears.


HOW TO REASSIGN A LINK

When you are preparing to publish content updates for a Flare target, there may occasionally be times when you want to reassign a link that is associated with a community topic. This lets you take the embedded discussion form associated with a topic and associate it with a different topic.


☆ EXAMPLE

Let's say you have a topic with the file name, "Feeding_Cats.htm" and you decide to rename it, "Feeding_a_Cat.htm." When you make this change, the Remap Community Topics dialog will list this change in two places.


The New Topics tab will show the new topic file name. If you click **OK** in the dialog, the system would add a new stream for the topic in the Pulse system:

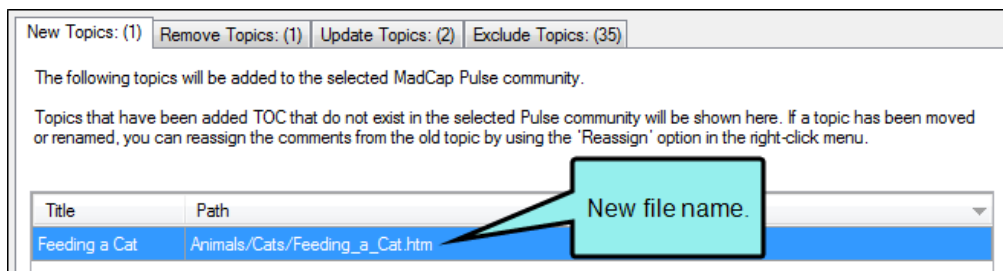

The Remove Topics tab will show the former file name. If you click **OK** in the dialog, the system would remove the corresponding stream for the topic in the Pulse system:

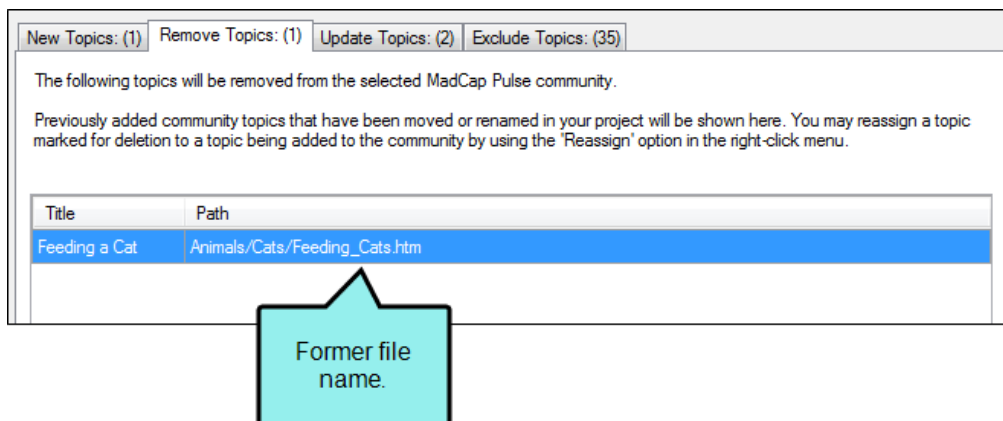


- ☆ Instead of creating a new stream for the new topic named "Feeding_a_Cat.htm", let's say you want to keep the discussion from the existing stream associated with "Feeding_Cats.htm." You can reassign the link to tie the discussion with the old file name to the new file name.

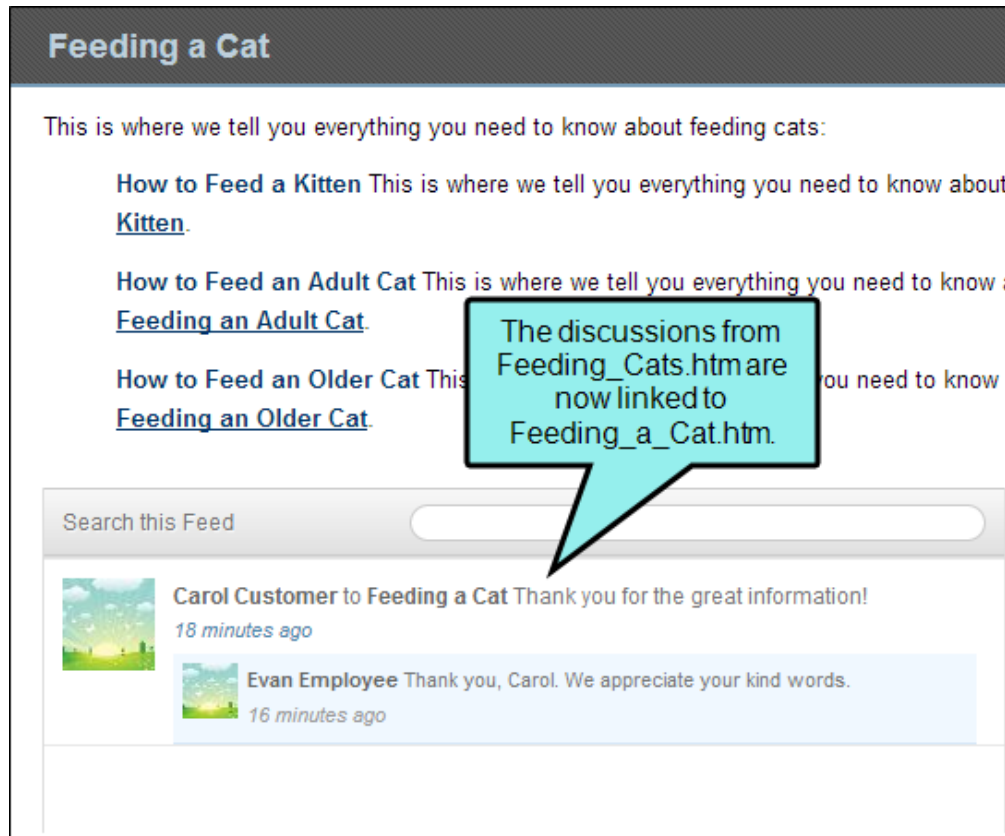


HOW TO REASSIGN A LINK

1. Make your content changes in Flare. Be sure to make all of the desired updates in the Flare TOC associated with your target.
2. Open the Flare target.
3. In the Target Editor, select the **Community** tab.
4. Select the appropriate Flare community in the **Community** drop-down list.
5. Click **Remap Topics**. This opens the Remap Community Topics dialog so you can review the updates. In this example, we've renamed a topic file from "Feeding_Cats.htm" to "Feeding_a_Cat.htm."

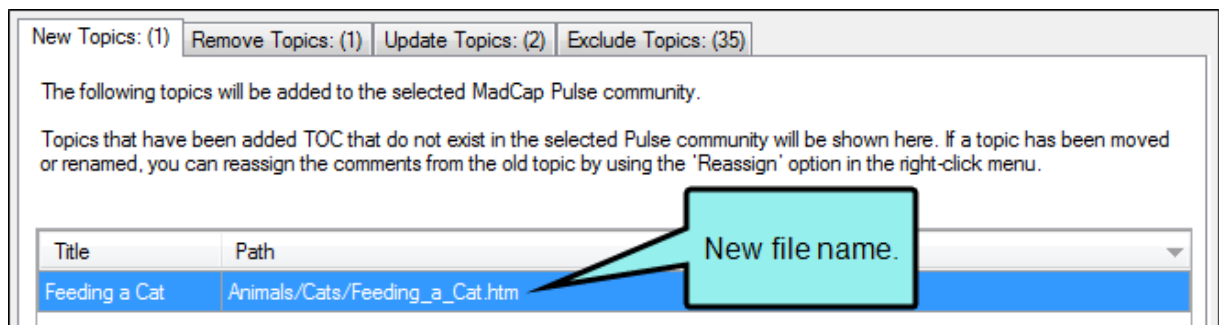

6. In the **New Topic** tab, right-click the new topic and select **Reassign Link** from the context menu.

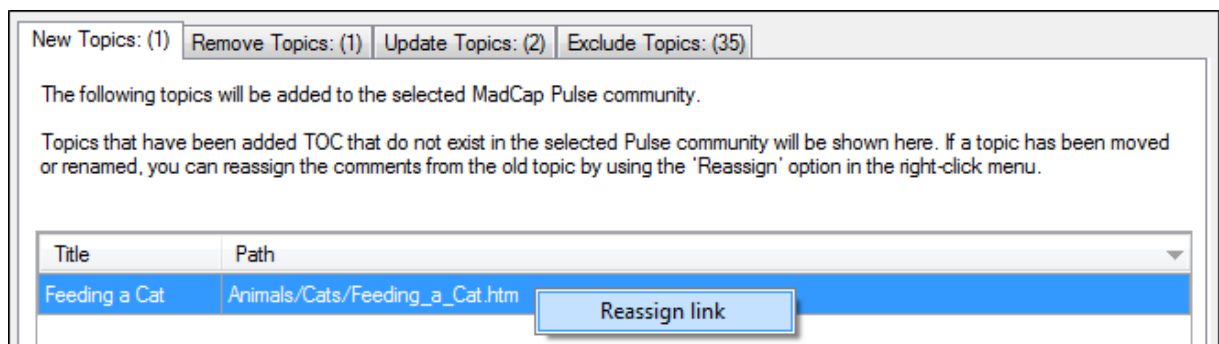

This opens the Reassign Community Link dialog.

7. From the **Select Links** drop-down list, select the desired topic. This will map the embedded discussion form for the selected link with the topic. In this example, we will select the topic formerly named, "Feeding_Cats.htm."

Select a link to associate community link to a new topic.

Any comments posted on the community link will be displayed under the new topic after the TOC has been synced with the MadCap Pulse community.

Topic Links

Select Link

Feeding a Cat - Animals/Cats/Feeding_Cats.htm

TOC Link

Title

Feeding a Cat

Link

Animals/Cats/Feeding_a_Cat.htm

Community Link

Title

Feeding a Cat

Link

Animals/Cats/Feeding_Cats.htm

OK Cancel


8. When finished, click **OK**. The community updated message appears.

When you republish your Flare target, the discussion originally linked to the former file is now linked to the new file.


HOW TO VERIFY THE COMMUNITY TOPICS IN THE PULSE SYSTEM

To see the community topics that have been created for your Flare output:

1. Log in to the Pulse dashboard with an appropriate user account.

 **NOTE:** To access systems, you must be a member of the Administrators or Employees group.


2. In the menu bar, select **Systems > Find Systems**. The Find Systems page appears.
3. Under **New Systems**, click the Pulse system that corresponds to the appropriate Flare community.

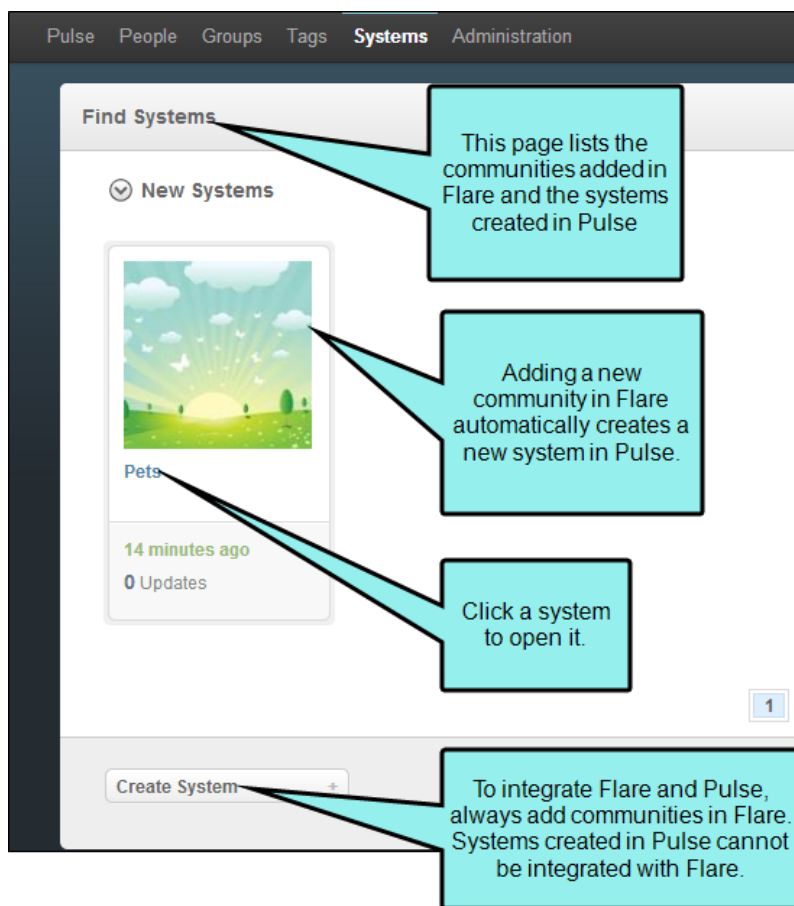

4. In the community page, click the **Topics** link.




5. In the list of topics, click a topic. Any community activity for the topic will be reflected in the stream.

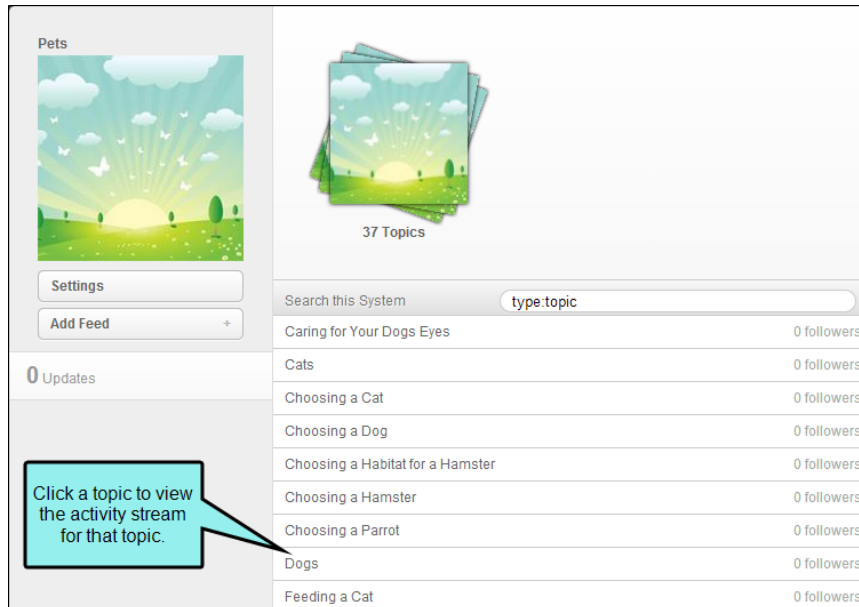

Enabling the Community Tab in the Output

You need to decide whether you want to include or exclude the Community tab with your published output. For HTML5 output, this can be done for Tripane skins only.


Below is an example of the Community tab:

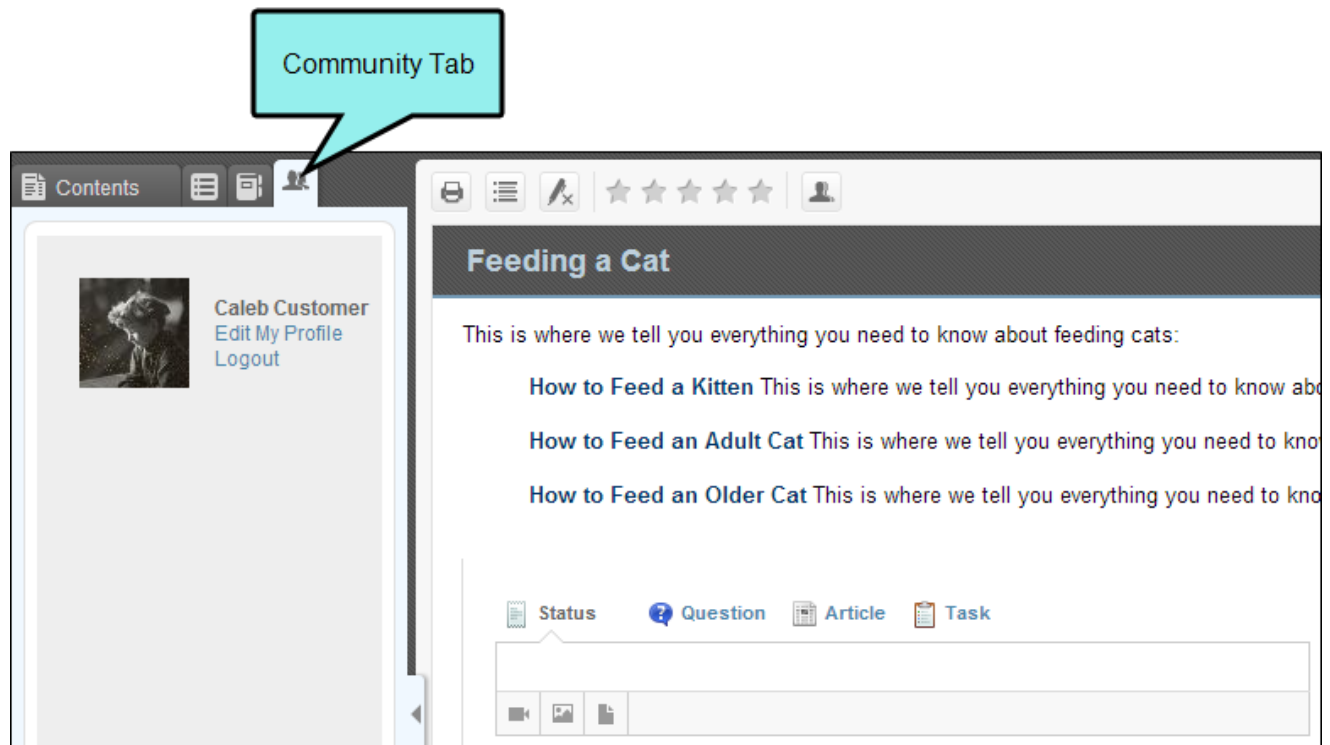


You can enable or disable this feature by editing the general features of the skin associated with the Flare target.


The benefits of including the Community tab in your output include:

- Gives site visitors the ability to register for a Pulse account. Also gives registered users the ability to log in to Pulse directly from the Flare output.

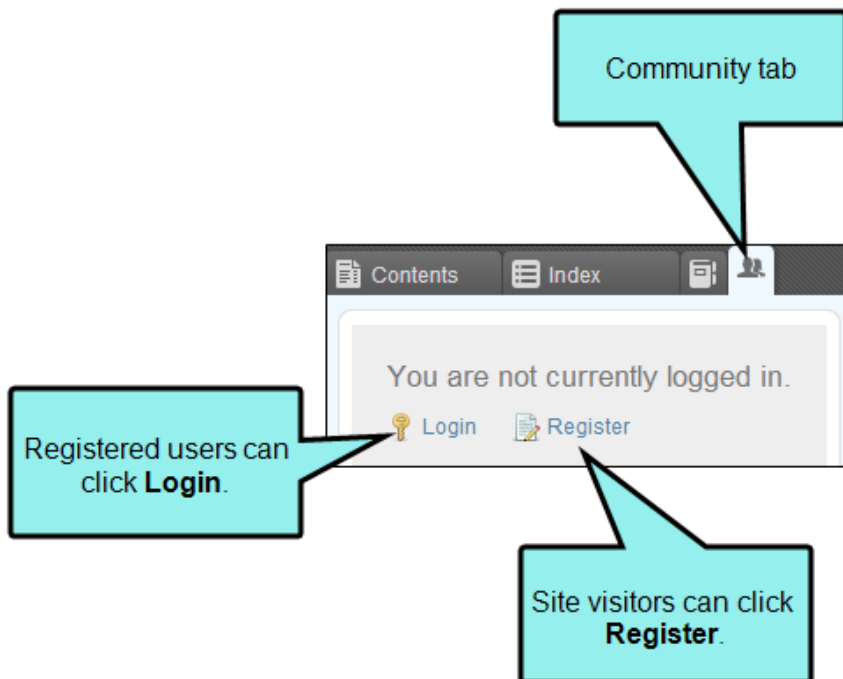

- Gives registered users the ability to edit their profile, which includes changing their avatar image, updating personal information, and modifying notification preferences.

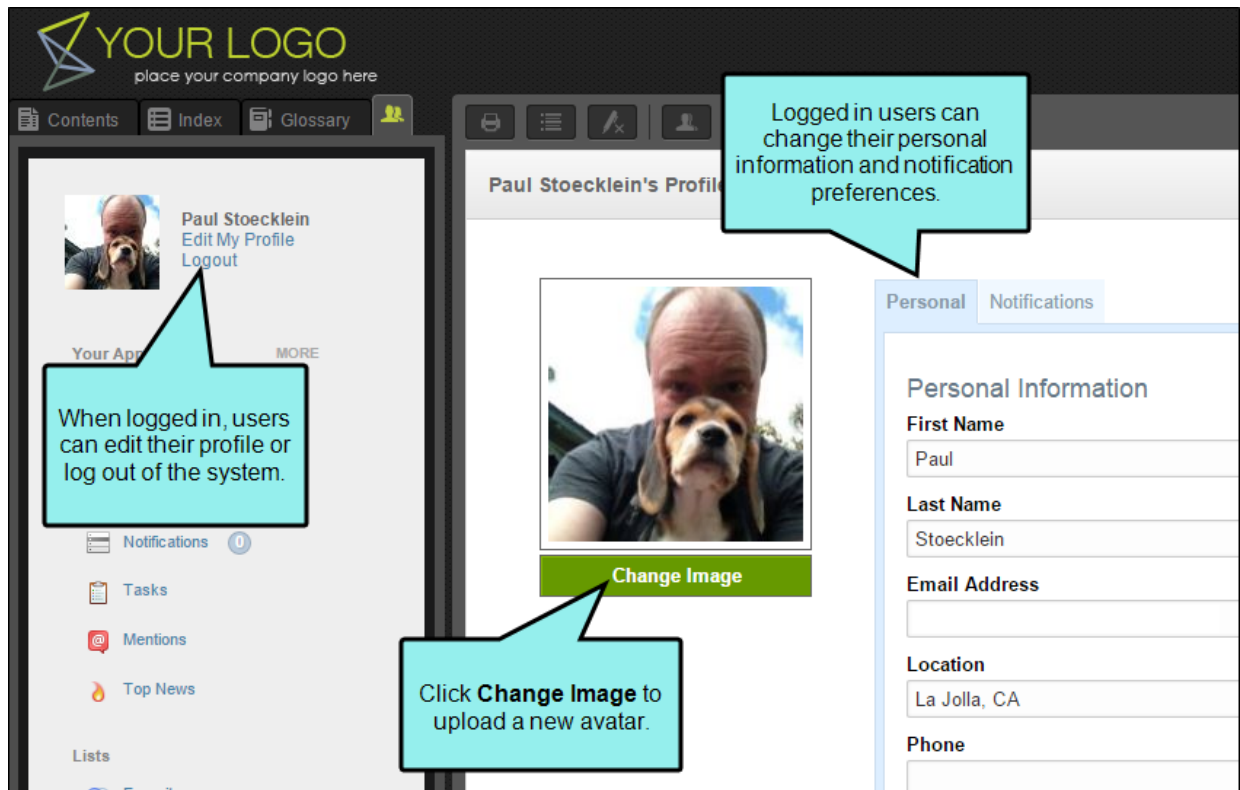

 **NOTE:** You cannot add a Community pane to Top Navigation or skinless HTML5 output, because those outputs do not use panes. However, registered users can open the dashboard in a browser and access some of the features that are normally available in the Community pane in the Flare output (depending on the access level).

Setting the Community Options—Comments and Search Results


You can set community options, which control the display of comments and search results. For both Standard and HTML5 skins, you can do this in the Skin Editor. For HTML5 outputs—including skinless—you can also use your stylesheet to display or hide topic comments; this makes it possible to show comments for some topics but hide them for others.

HOW TO SET THE COMMUNITY OPTIONS USING A SKIN

1. In the Project Organizer, open a Standard or HTML5 skin.
2. In the Skin Editor, click the **Community** tab. You have these options:

TO DISPLAY TOPIC COMMENTS

If you want registered Pulse users to have the ability to post comments in the embedded discussion forms that Pulse includes at the bottom of the Flare topics, place a check mark in the **Display topic comments at the end of each topic** check box. This check box is selected by default.

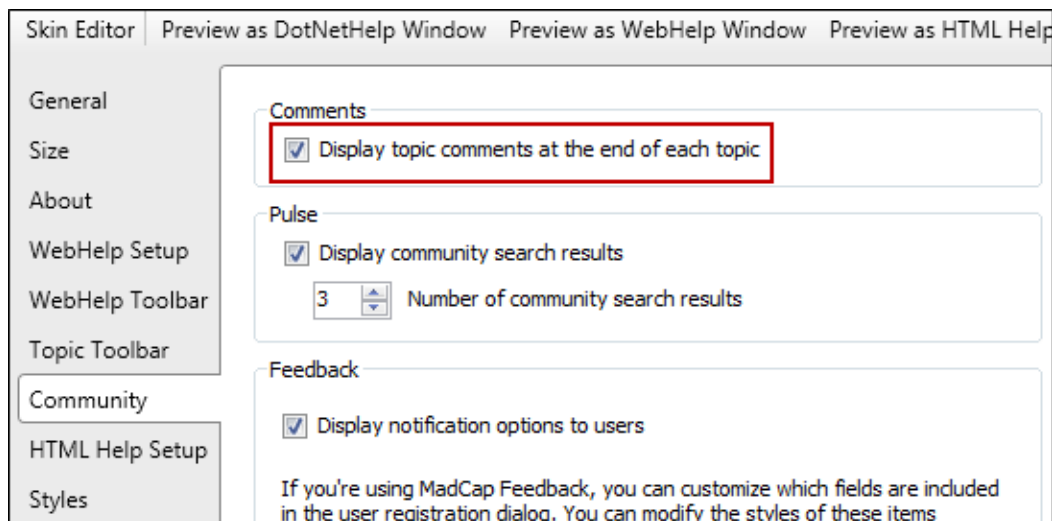


TO DISPLAY COMMUNITY SEARCH RESULTS


You can configure the Flare skin to give the Flare search engine the ability to index the Pulse system and return any community results when end users perform searches.

☆ EXAMPLES


In HTML5 output, Pulse posts matching the search query are listed on the Search Results page under a **Community Results** link:

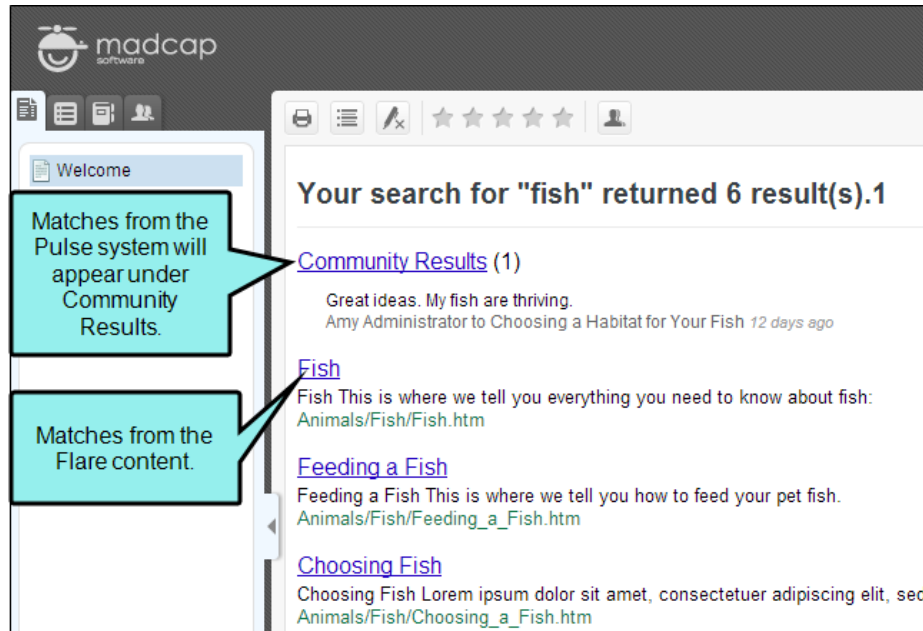

- ☆ If a user clicks the **Community Results** link shown above, only the matching Pulse content appears in the results page:

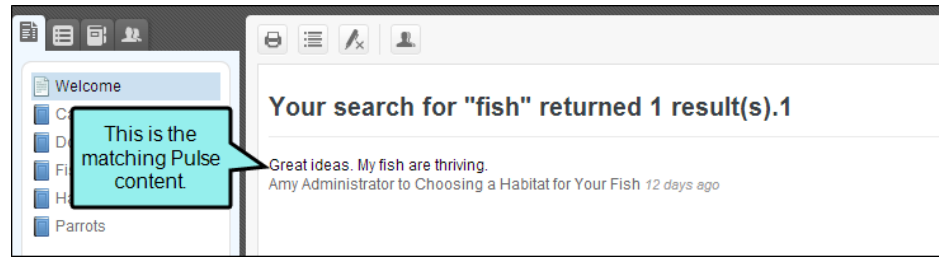

Users can then hover the mouse cursor over the content to reveal a links that open either the matching Pulsepost, the matching Flare topic and the match-ingPulse post, or the Pulse user feed.

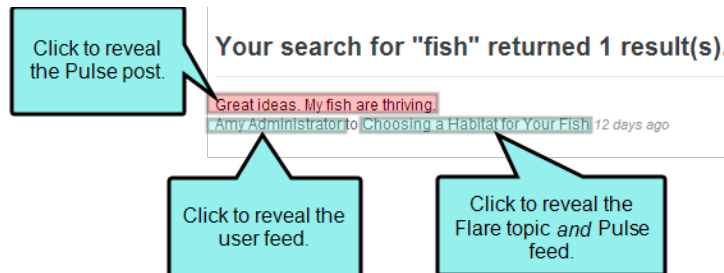


This feature works similarly in WebHelp output.

TO DISPLAY SEARCH RESULTS

- Open a Standard or HTML5 skin.
- Click the **Community** tab.
- Place a check mark in the **Display community search results** box.
- (Optional) In the **Number of community search results** field, you can enter the number of community search results shown by default when a search is made in the output. The default number in this field is 3.



NOTE: The Feedback area in the Community tab of the Skin Editor is only relevant to Feedback Server Admin. The Feedback option is not supported by Pulse.

3. Click  to save your work.

Building and Publishing the Flare Output

Once you set up the community features, you can build and publish your Flare output.

When building the output, you may see a message that states, "Some community features will not be displayed in tablet and mobile outputs." This means that when users are viewing your responsive output on a tablet or phone, they will not see comments or the Community tab. However, Pulse still tracks hits on pages in those formats for reporting purposes. You can hide the warning if you do not want to see it in future builds.

Frequently Asked Questions

Following are some frequent questions about the Pulse installation and administration tasks.

This chapter discusses the following:

- General 124
- Windows Installer125
- .NET Framework126
- IIS 130
- Pulse Setup Program139
- Pulse Server Application140
- RabbitMQ144
- User Administration146

General

Following are general frequently asked questions about the Pulse installation.

DO I HAVE TO HOST MY FLARE CONTENT ON THE PULSE WEB SERVER?

No. You can host the published Flare output on any server, computer, or location that has access to your Pulse web server.

DO I NEED A SEPARATE LICENSE CODE FOR EACH FLARE TARGET THAT I PUBLISH?

No. Each Flare target can be set up to have its own Pulse community. With Pulse, you can create an unlimited number of communities using the same license code.

HOW DO I INTEGRATE PULSE WITH MY FLARE CONTENT?

If you have installed Pulse, you can now open the Flare project and enable the Pulse features using the Community Tab in the Flare target. See "Integrating Flare and Pulse" on page 89.

Windows Installer

Following are frequently asked questions about the Windows installer.

WHAT VERSION OF WINDOWS INSTALLER DO I HAVE?

1. In the Windows Start menu, type `Run` in the **Search Programs and Files** box. Select **Run** from the Program menu to open the Run dialog.
2. In the Open box, type `system32`. Then, press **Enter** or click **OK**.
3. Locate the file named "msiexec.exe."
4. Right-click the file and select **Properties** from the context menu.
5. Click the **Details** tab.
6. In the field next to **Product Version**, ensure that your system is running Version 4.5 or higher. You should be running version 4.5.6001.22159 or greater. Most systems will be running version 5.0, which meets the minimum requirement.


.NET Framework

Following are frequently asked questions about the .NET framework.

HOW DO I DETERMINE IF THE .NET FRAMEWORK IS ALREADY INSTALLED?


1. In the Windows Start menu, type `Run` in the **Search Programs and Files** box. Then select **Run** from the Program menu to open the Run dialog.
2. In the Open box, type `regedit .exe`. Then, press **Enter** or click **OK**.
3. If you are prompted by the following User Account Control message. Click **Yes** to open the Registry Editor.
4. In the Registry Editor, the following registry keys will be visible if the required versions are installed:

! IMPORTANT: When checking the information below, always make sure you are verifying the version numbers in the "NET Framework Setup" directory and *not* the ".NET Framework" directory.

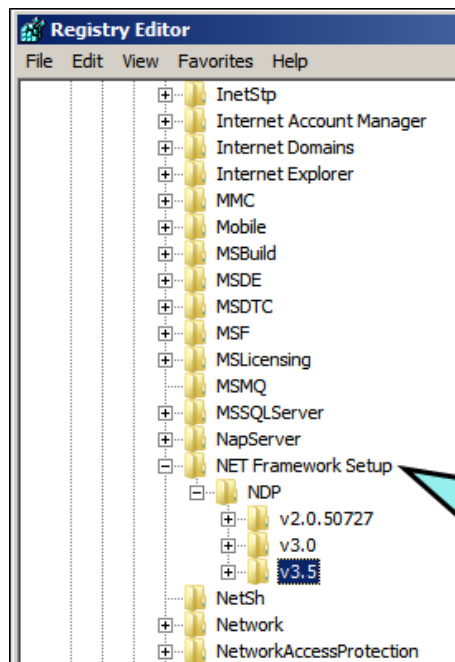


Always check the version numbers in the NET Framework Setup folder.

- For Version 4.0 Navigate to HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\NET Framework Setup\NDP\v4\Full. You should see 4.0 or above in the **Version** row.

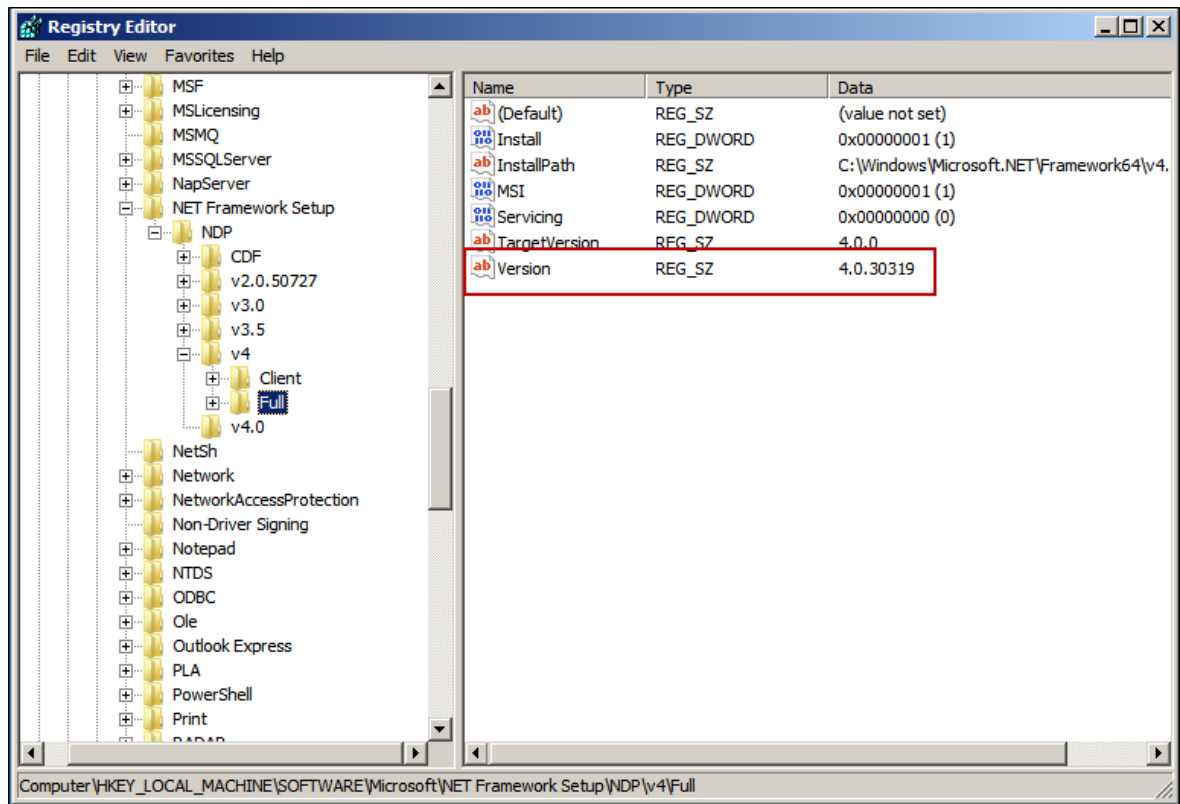

- For Version 4.5 Navigate to HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\NET Framework Setup\NDP\v4\Full. The existence of DWORD in the **Release** row indicates that .NET 4.5 or above is installed. The number shown in parentheses refers to a specific .NET version (see [http://msdn.microsoft.com/en-us/library/hh925568\(v=vs.110\).aspx](http://msdn.microsoft.com/en-us/library/hh925568(v=vs.110).aspx)).

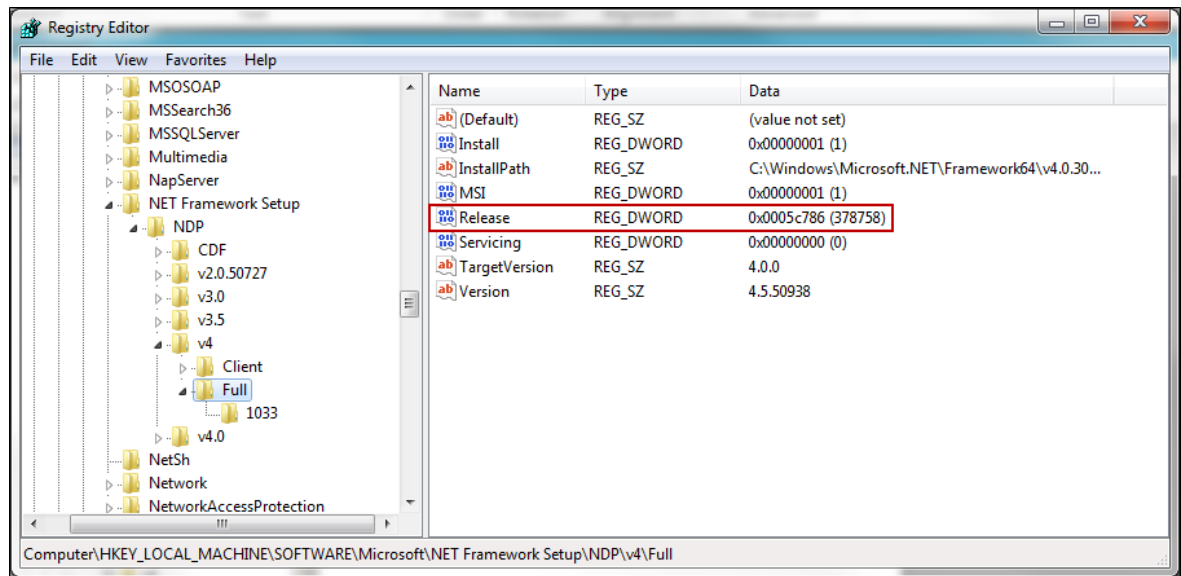

SHOULD I INSTALL THE FULL PACKAGE OR CLIENT PACKAGE?

You should always install the full package when working with server applications. The full framework provides a number of features and assemblies that are not available with the client package.

IIS

Following are frequently asked questions about IIS.

WHAT IS IIS?

Internet Information Services is a web service role that is enabled in the operating system to give the system its web server capabilities. IIS must be installed on the computer that will be acting as your Pulse web server.

HOW DO I DETERMINE IF IIS IS INSTALLED?

There are two ways to determine if IIS is installed on a system:

INSTRUCTIONS FOR USING THE WINDOWS CONTROL PANEL

1. Open the Windows Control Panel.
2. Click **Programs**. Then under **Programs and Features** click **Turn Windows features on or off**.
The Windows Features On or Off dialog appears.
3. Look for **Internet Information Services**.


INSTRUCTIONS FOR USING RUN COMMAND

1. Open the **Start** menu and choose **Run**.
2. In the Run dialog, type `inetmgr` Then, press **Enter** or click **OK**.
3. If the Internet Information Services (IIS) Manager appears, the program is installed.


IIS IS ALREADY INSTALLED ON OUR SERVER. HOW DO I CREATE A NEW WEB SITE FOR PULSE IN IIS?

When you install IIS for the first time, a "Default Web Site" is automatically created in the \inet-pub\wwwroot directory on the web server. You can either use this default directory to publish the Pulse content or you can create a new directory in the IIS file system by following these steps:


1. Click **Start > Administrative Tools** and select the **Internet Information Services (IIS) Manager**.

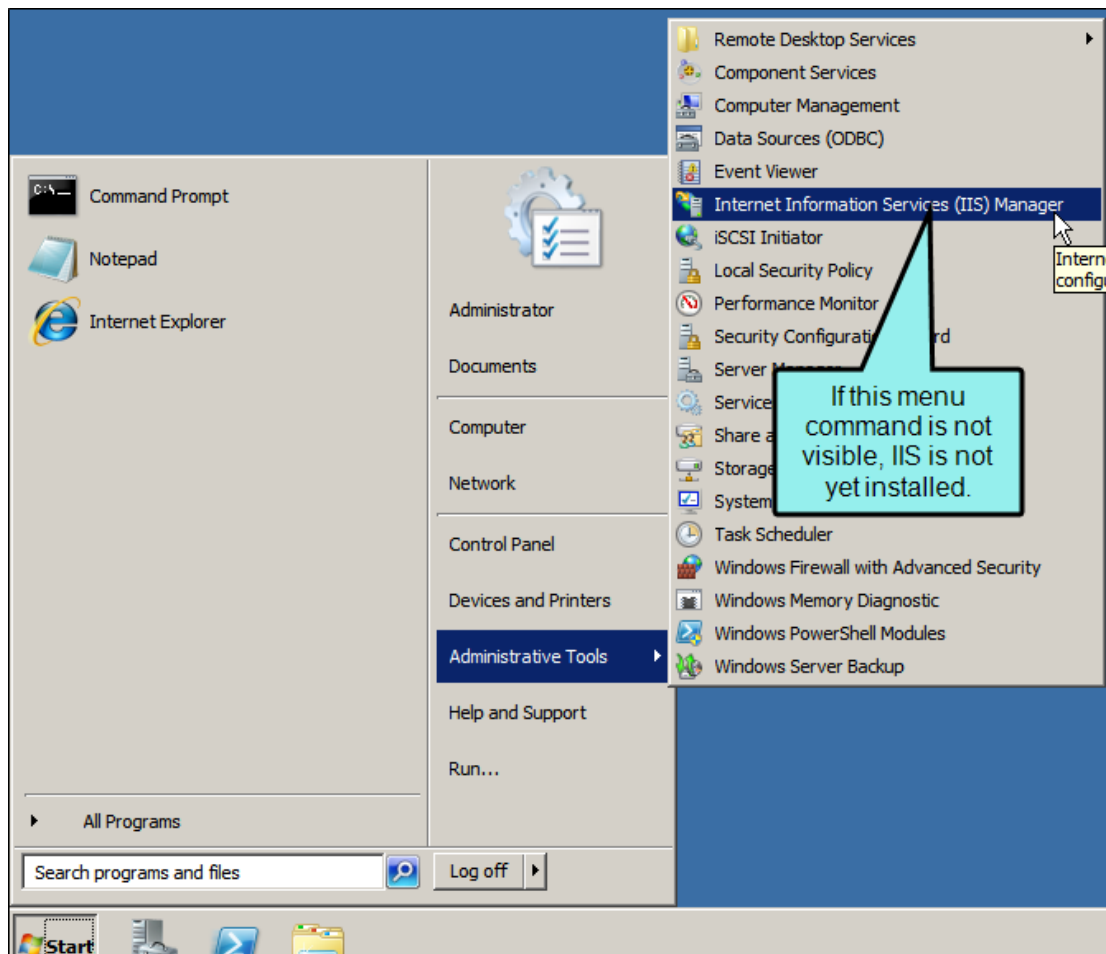

2. In the Connections pane, right-click the **Sites** container and select **Add Web Site**.

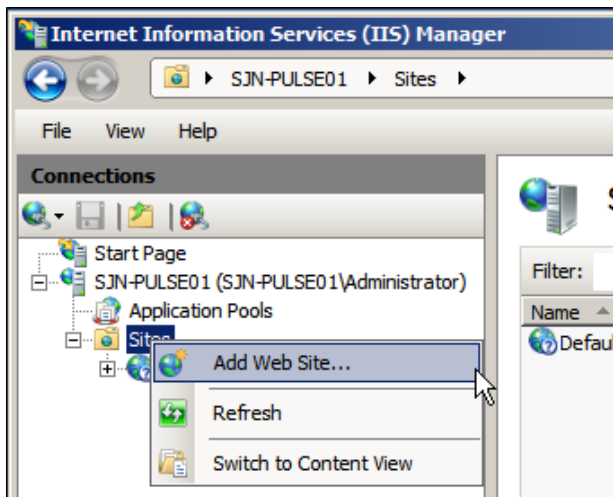

3. In the Add Web Site dialog, type a name for your Pulse site in the **Site name** box. For example, type **Pulse**

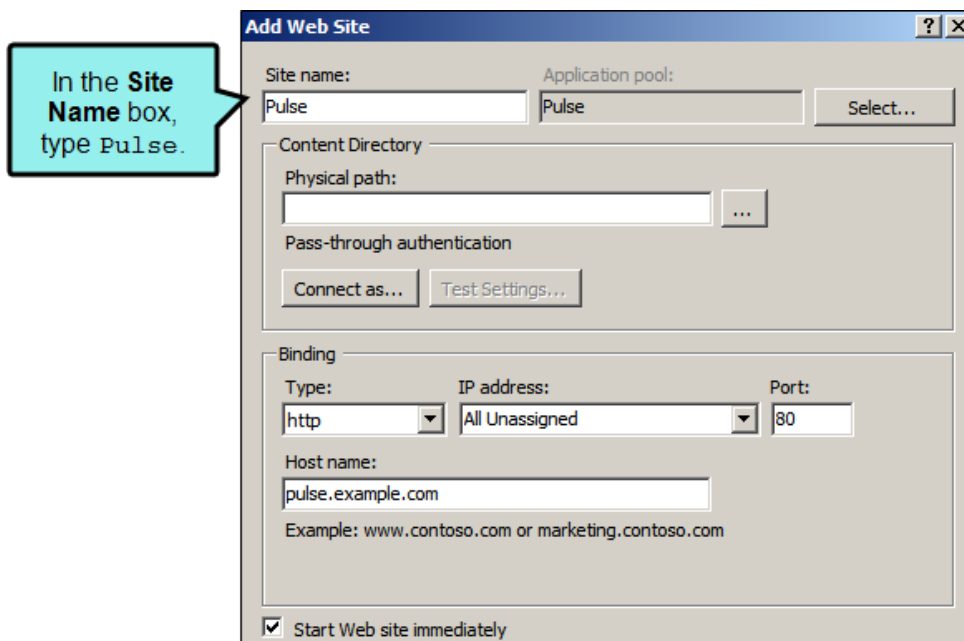

4. In the **Application pool** box, make sure the desired application pool appears. In this example, the default application pool is named **Pulse**.



NOTE: If you want to use a different application pool, click the **Select** button. Then, choose the desired Application pool from the list and click **OK**.

5. In the **Physical path** box, type the physical path to the folder that you want to use as your content directory for Pulse. In this example, we created this folder structure: %SystemDrive%\pulsepub\wwwroot.
6. From the **Type** list, select the desired protocol. In this example, we selected **http**.
7. In the **IP address** box, type a static IP address.
8. Type a port number in the **Port** text box. The default port number is 80.
9. If you want to use a host name for your URL, enter it in the **Host name** box. In this example, we are using `pulse.example.com`.
10. If you do not have to make any changes to the site, and you want the web site to be immediately available, place a check mark in the **Start Web site immediately** box.
11. Click **OK**.


HOW DO I USE A HOST NAME FOR THE PULSE URL?

By default, the Default Web Site that Pulse uses to serve your dashboard content requires you type <localhost>/Pulse to gain access your dashboard content. However, you can change the localhost to a domain name, if desired.


☆ EXAMPLE


Let's say that to access your Pulse dashboard content users must type:
`http://127.0.0.1/Pulse/` in the browser address bar. Using the steps below, you can change the host name to give users the ability to type: `http://pulse.example.com`.

1. Click **Start > Administrative Tools** and select the **Internet Information Services (IIS) Manager**.

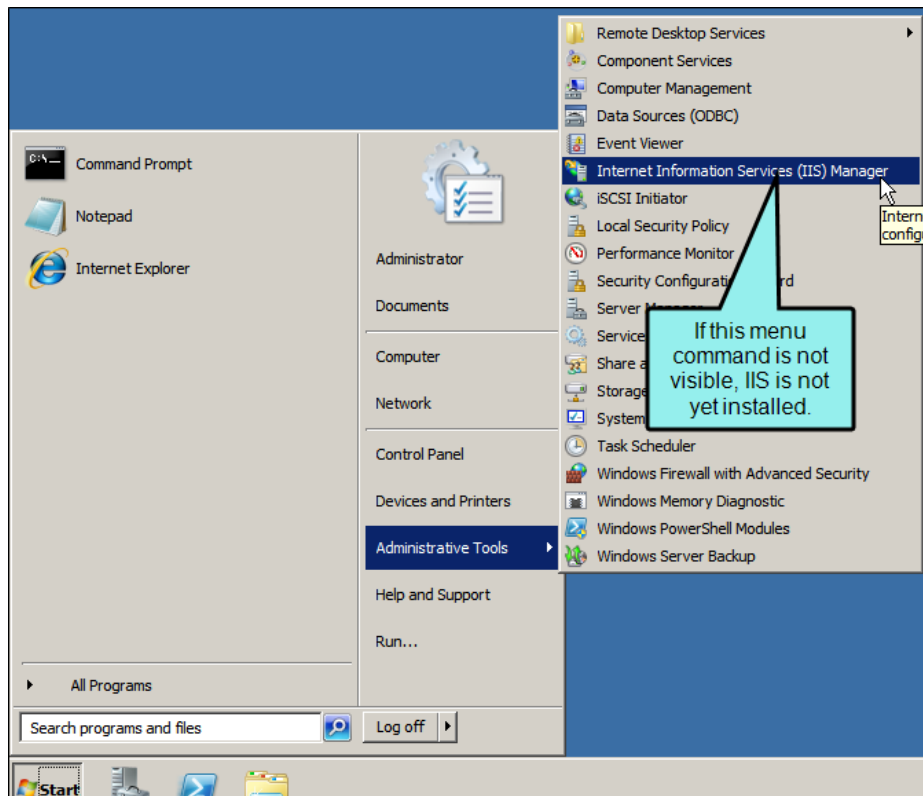


2. Right-click your Pulse web site and select **Switch to Features View** from the menu.

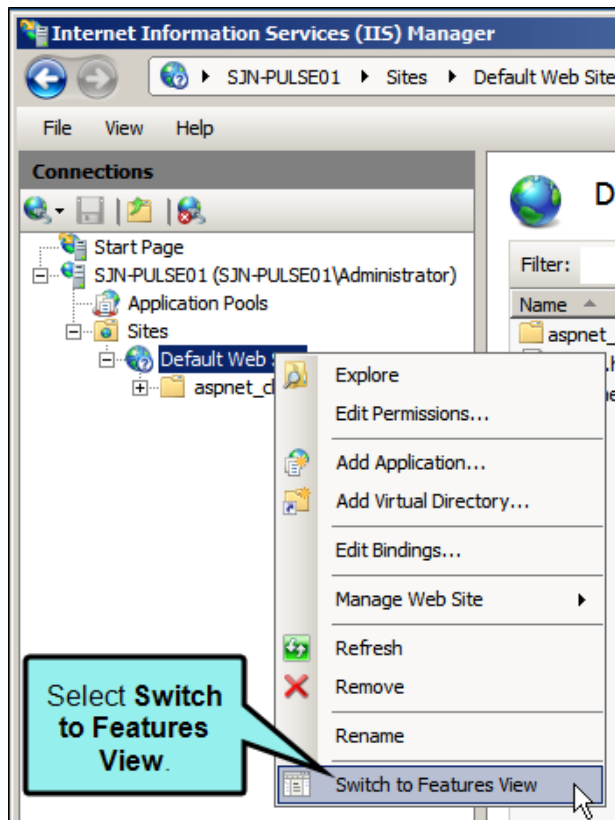


 **NOTE:** In this example, we are using the Default Web Site for Pulse.


3. In Features View, under the **ASP.NET** area, right-click **Providers** and select **Bindings** from the context menu.

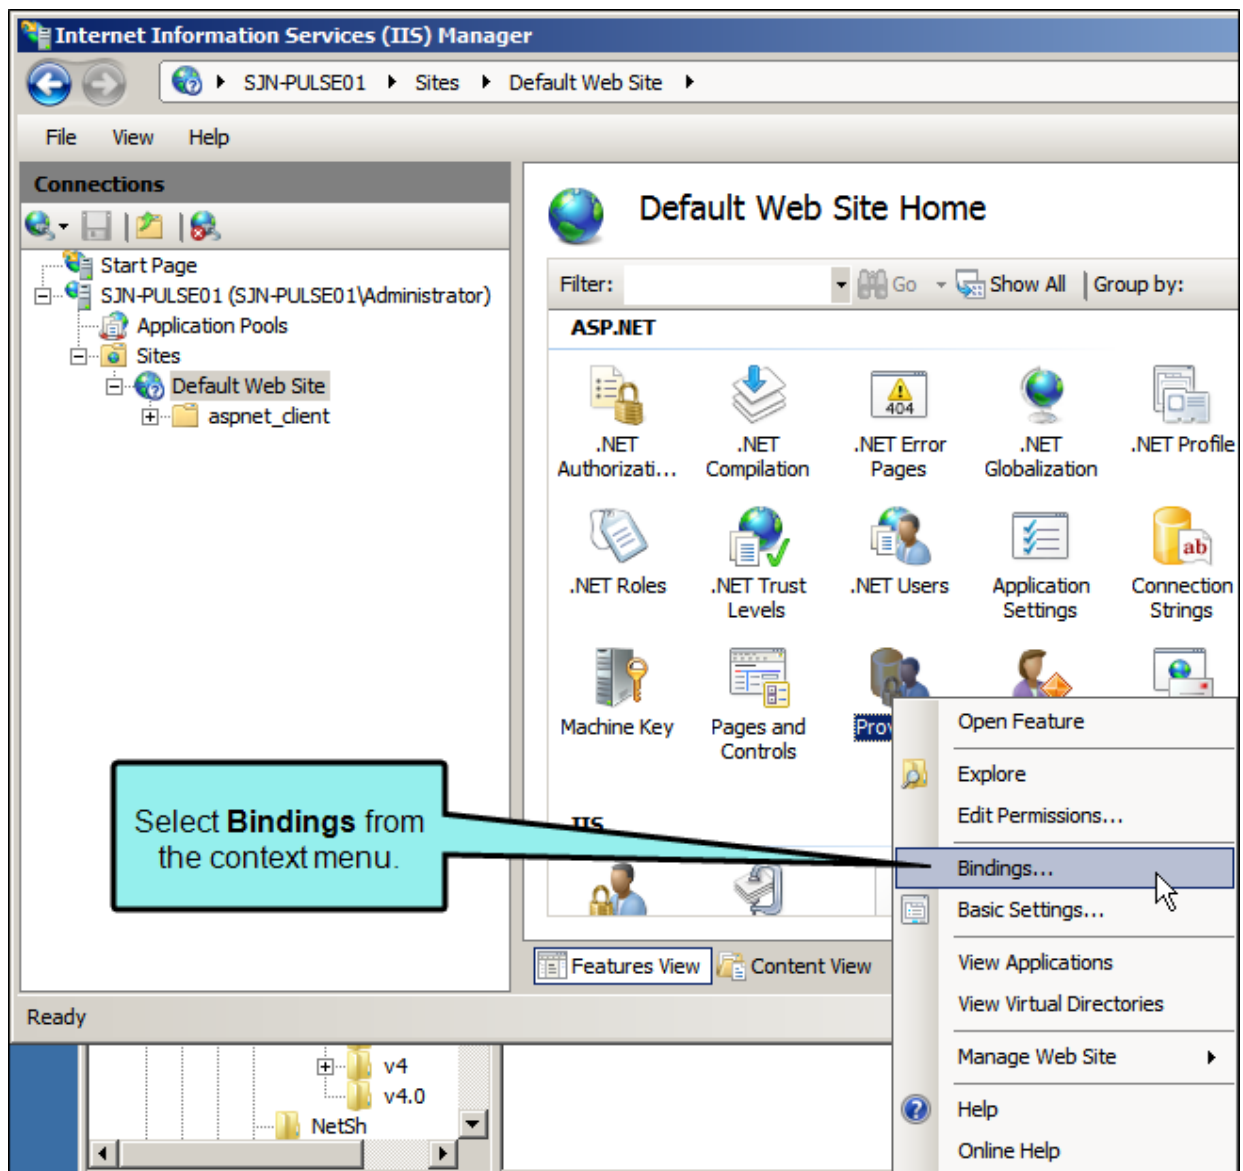


4. In the Site Bindings dialog, highlight the appropriate protocol. In this example, we highlighted the protocol **http** in the Type column. Then click **Edit**.

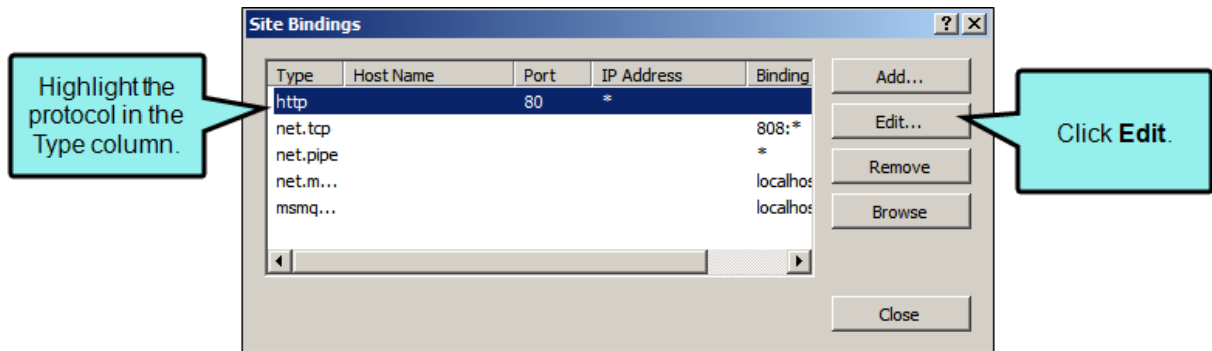

5. In the Edit Site Binding box, type the host name for your Pulse URL. For example, type: `pulse.example.com`. Then click **OK**.

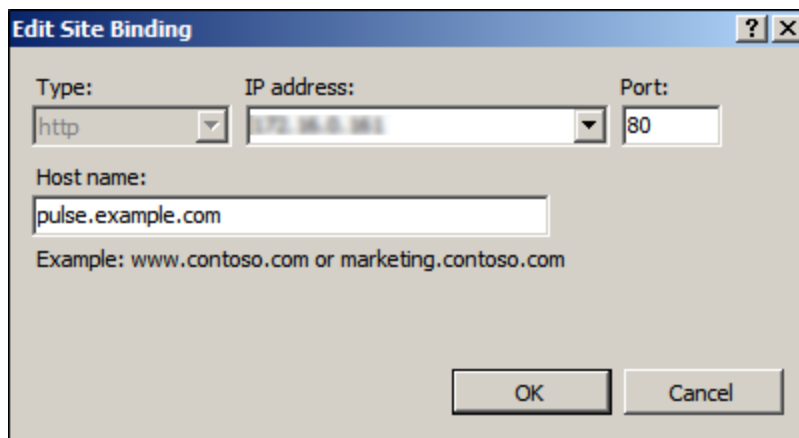

6. In the Site Bindings dialog, click **Close**.

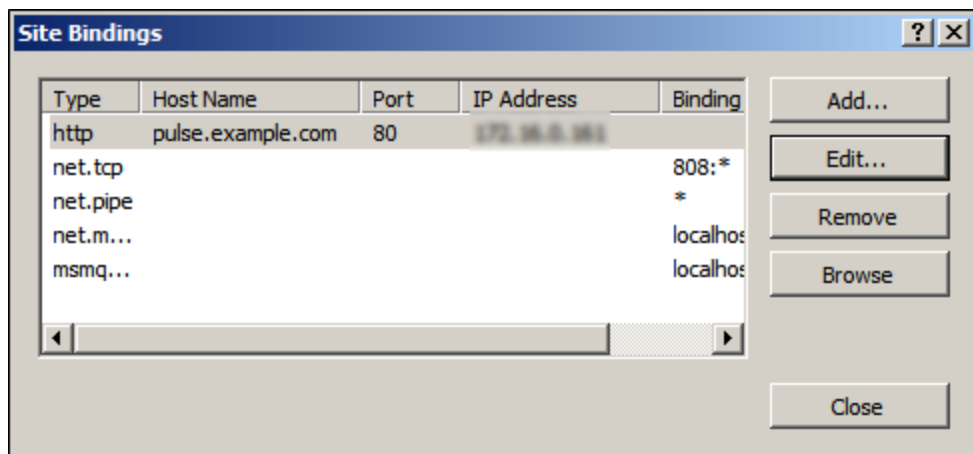


7. Select **File > Exit** to close IIS Manager.

Pulse Setup Program

Following are frequently asked questions about the Pulse setup program.

DO I INSTALL THE .NET FRAMEWORK BEFORE PULSE?

Yes. The .NET Framework is a prerequisite for the Pulse setup program. If you do not install the framework, a notification message similar to the following one will appear when you attempt to run the Pulse setup program on the server:

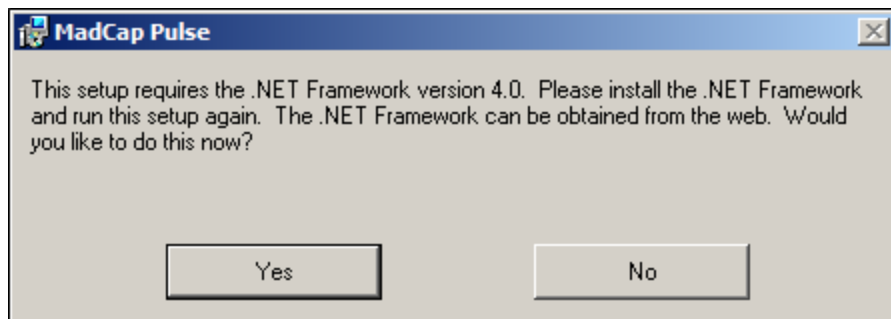


You should click **Yes** in the error message. This will direct you to the Microsoft .NET Framework (Web Installer) page in a new browser window, so you can download and install the framework.

Pulse Server Application

Following are frequently asked questions about the Pulse server application.


WHY AM I SEEING THE "PULSE WAS UNABLE TO PROCESS YOUR REQUEST" MESSAGE?

This message displays when you are attempting to log in to the Pulse dashboard.

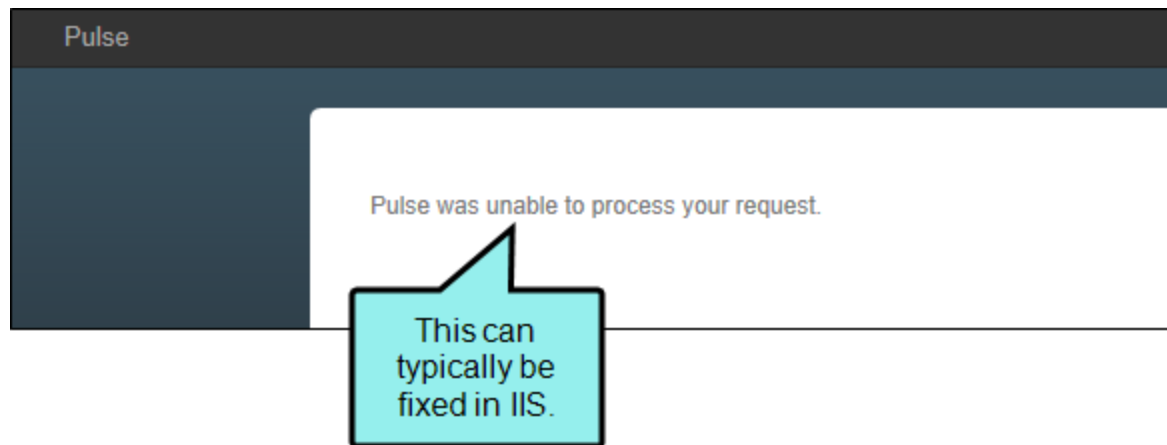


When this message appears, first try refreshing your browser content. If the message still appears, it typically means that IIS is not able to properly handle responses for the ExtensionlessURL resources. This can quickly be resolved in Internet Information Services (IIS) Manager.

1. Log in to the Pulse web server as an administrator.
2. Click **Start > Administrative Tools** and select the **Internet Information Services (IIS) Manager**.
3. In the left pane, double-click the appropriate connection. Then double click **Handler Mappings**.

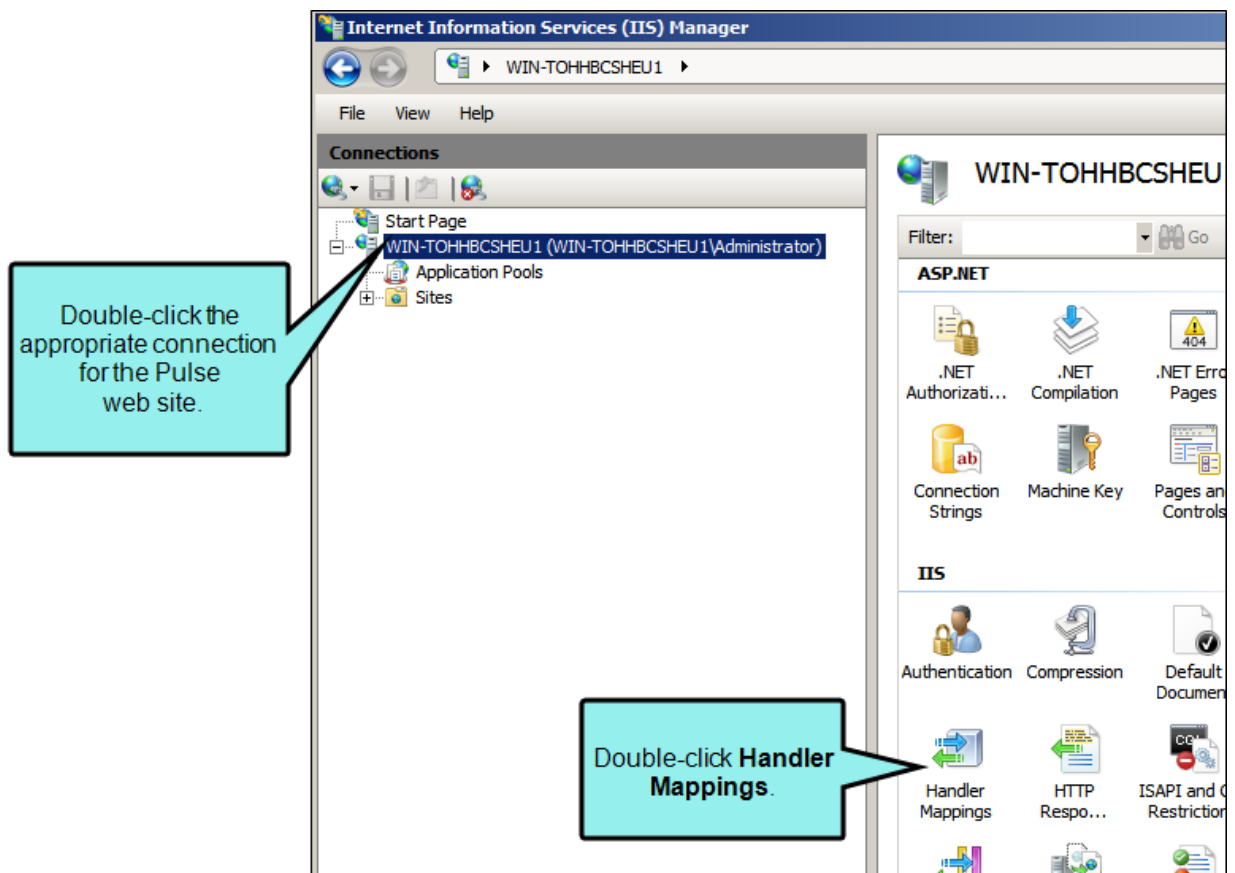

4. In the Actions pane, click **View Ordered List**

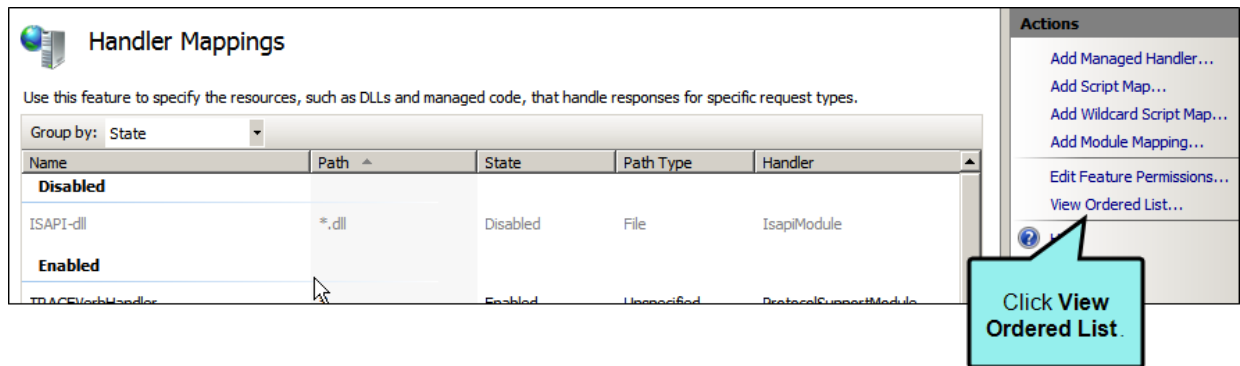

5. Look for these mappings in the **Name** column: ExtensionlessUrl-ISAPI-4.0_32bitExtensionlessUrl-ISAPI-4.0_32bitExtensionlessURL-Integrated-4.0
6. Select each mapping individually. Then in the Actions pane, click **Move Down** until all of the mappings are near the bottom of the list, just above StaticFile.


AXD-ISAPI-2.0-64	*.axd	Enabled	Unspecified
PageHandlerFactory-ISAPI-2.0-64	*.aspx	Enabled	Unspecified
SimpleHandlerFactory-ISAPI-2.0-64	*.ashx	Enabled	Unspecified
WebServiceHandlerFactory-ISAPI-2.0-64	*.asmx	Enabled	Unspecified
HttpRemotingHandlerFactory-rem-ISAPI-2.0-64	*.rem	Enabled	Unspecified
HttpRemotingHandlerFactory-soap-ISAPI-2.0-64	*.soap	Enabled	Unspecified
CGI-exe	*.exe	Disabled	File
TRACEVerbHandler	*	Enabled	Unspecified
OPTIONSVerbHandler	*	Enabled	Unspecified
ExtensionlessUrlHandler-ISAPI-4.0_32bit	*	Enabled	Unspecified
ExtensionlessUrlHandler-ISAPI-4.0_64bit	*	Enabled	Unspecified
ExtensionlessUrlHandler-Integrated-4.0	*	Enabled	Unspecified
StaticFile	*	Enabled	File or Folder

7. Close the IIS Manager.

WHY AM I SEEING THE "WEB SITE TEST FAILED" MESSAGE?

If you encounter the "Web site test failed" message when testing your web site setting in the Pulse Server Configuration window, it is recommended that you first ensure your Pulse web site is running in IIS.

1. Log in to the Pulse web server as an administrator.
2. Click **Start > Administrative Tools** and select the **Internet Information Services (IIS) Manager**.
3. In the Connections pane on the left side of the window, expand the **Sites** container.
4. Locate your Pulse web site. In this example, the Pulse web site is the "Default Web Site."
5. Right-click the website and select **Manage Web Site > Start** from the context menu.

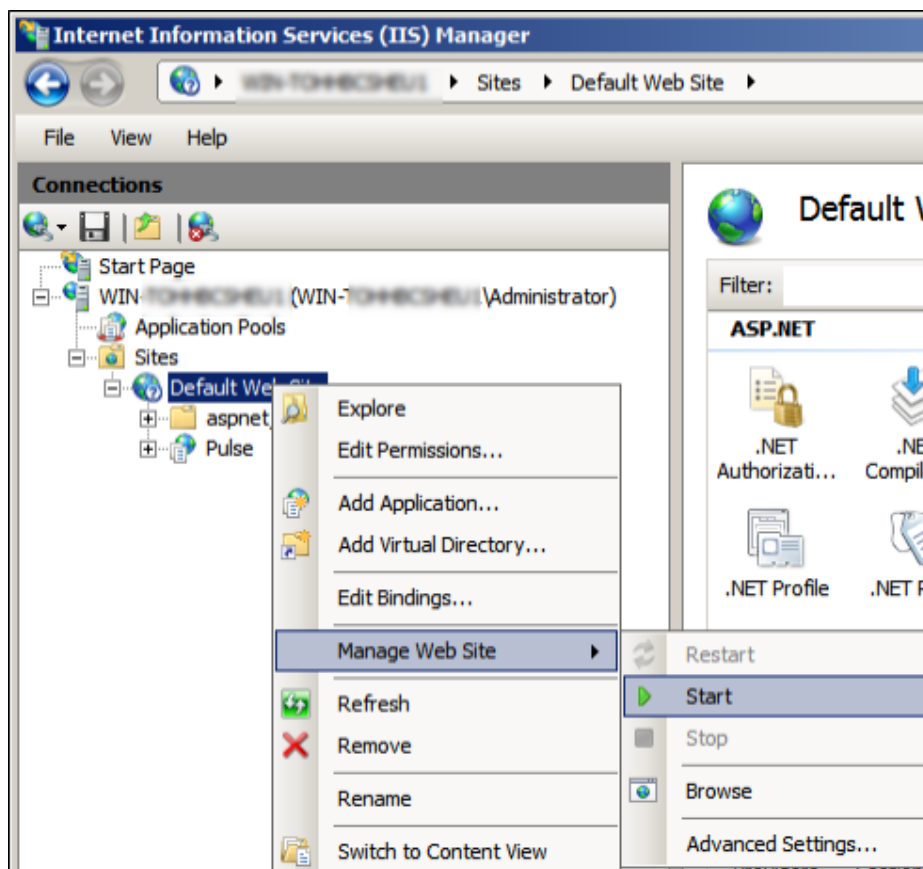

If your website is running successfully, we recommend returning to the Pulse Server Configuration window in the Pulse server application. Then, test your website settings again.

RabbitMQ

Following are frequently asked questions about RabbitMQ.


WHAT IS RABBITMQ?

The Pulse setup program installs a third-party tool, RabbitMQ. This runs as a Windows service and supports communication between the Pulse web server (IIS) and the SQL Server hosting your Pulse database.


RabbitMQ monitors the amount of RAM on the server, to raise alarms and block connections until the alarm is cleared. This is helpful because it will assist you preventing the server from crashing should free disk space get low.

WHERE IS THE RABBITMQ SERVICE INSTALLED?

The Pulse setup program installs the RabbitMQ tool at this path where Pulse is installed: C:\Program Files (x86)\MadCap Software\MadCap Pulse\Pulse.app\Tools. **Please note that this is just an example. Your files might be in different folder than C:\Program Files (x86).**

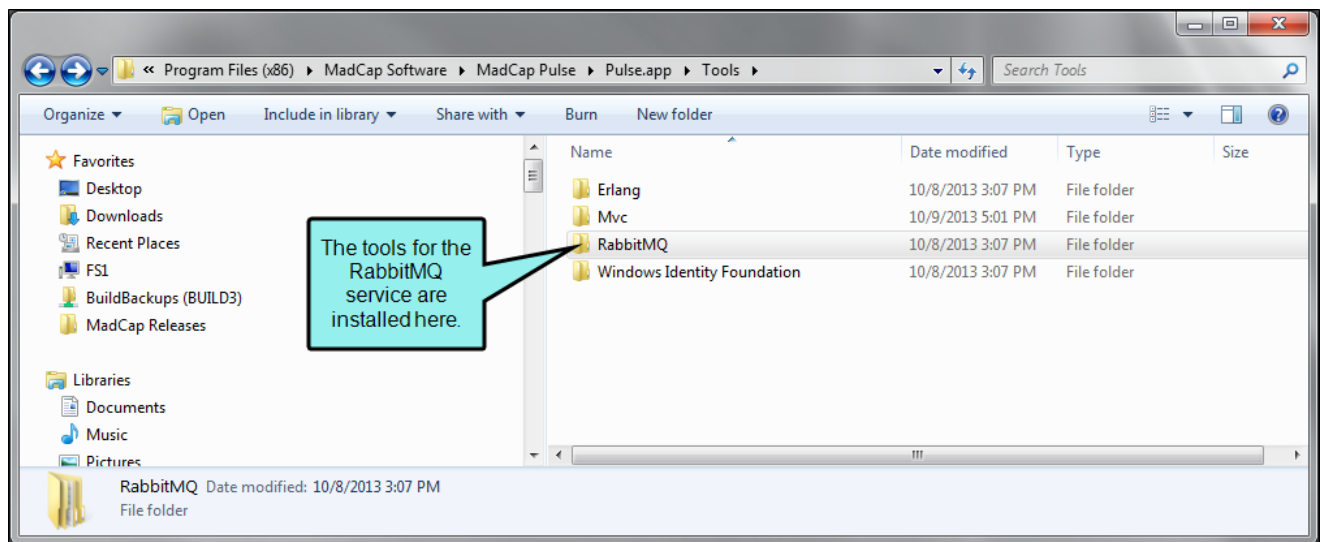

Once installed, Pulse runs the RabbitMQ tool as a Windows service:

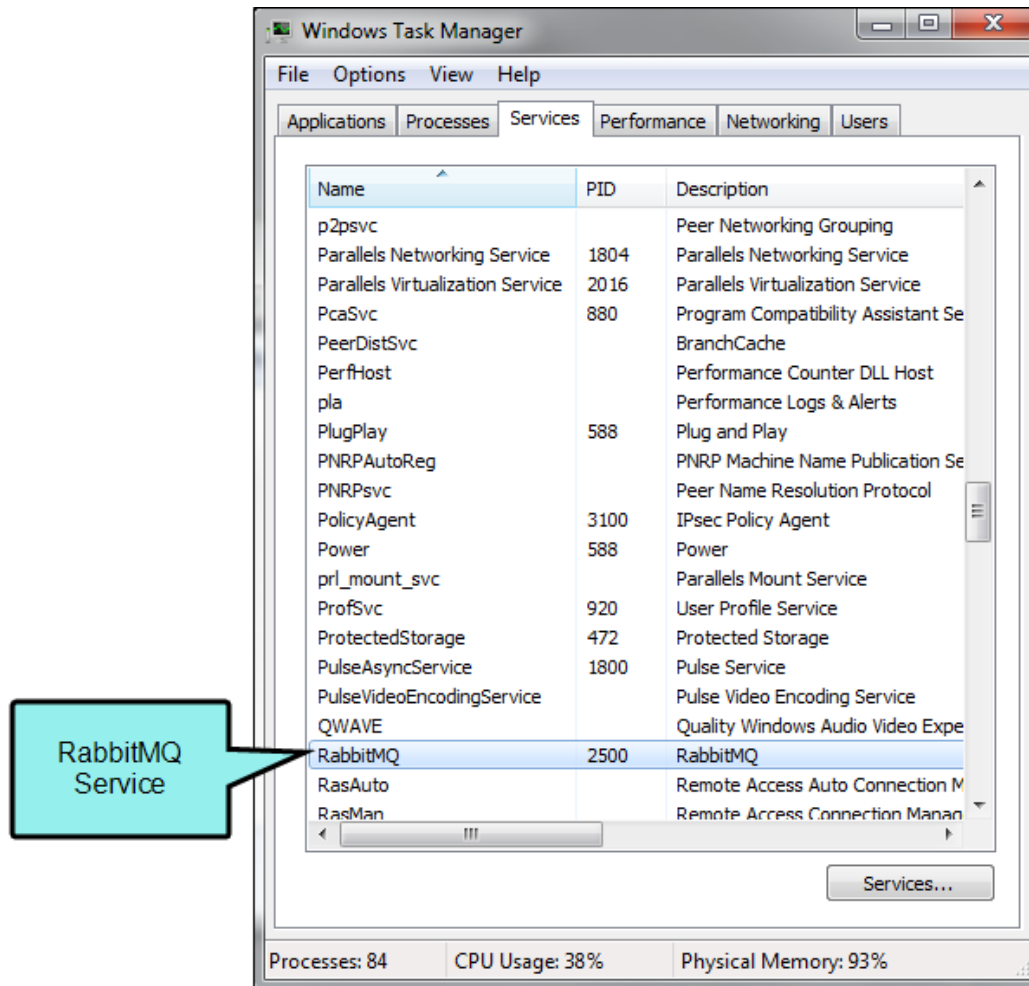

User Administration

Following are frequently asked questions about user administration.

HOW DO I REMOVE A USER SO THEY CAN RE-USE THEIR EMAIL ADDRESS IN PULSE?

Deleting a Pulse user removes all access to Pulse and keeps the user information in the Pulse database. To give a user the ability to re-use the email address in Pulse, you must first delete the user from the `dbo.Users` and `dbo.Login` tables in SQL Server. Once the entries are deleted, the email can be used to create a new Pulse account.

APPENDIX

PDFs

The following PDFs are available for download from the online Help.

Dashboard Admin Guide

Installation Guide for Windows Server 2008

Installation Guide for Windows Server 2008R2

Installation Guide for Windows Server 2012

Upgrading Guide

User Guide

What's New Guide